



Protect. Enhance. Outperform.

SEAMLESS & DECORATIVE FLOOR SYSTEMS

Durex® Epotel Terrazo

EPOXY BASED TERRAZZO FLOORING






Epotel Terrazzo Standard Colours

Durex® Epotel Terrazzo is available in 12 Standard Colours that are compatible with institutional and commercial environments including office complexes, airport & government offices, educational and healthcare facilities. Our standard colours portray the cleanliness, professionalism, and status that is expected of these environments.


Custom colours available upon request.




TER-01

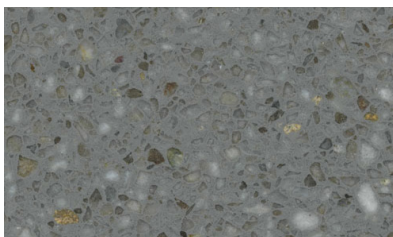


TER-02

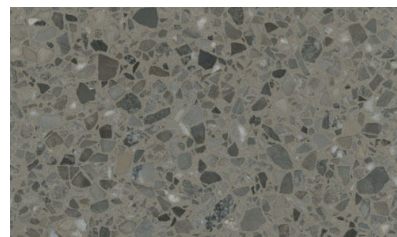

TER-03

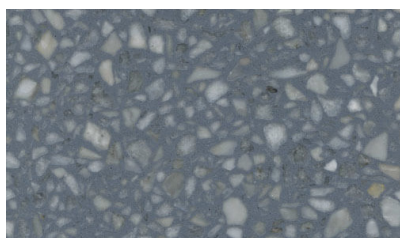


TER-04

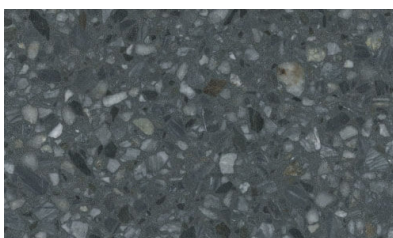

TER-05



TER-06

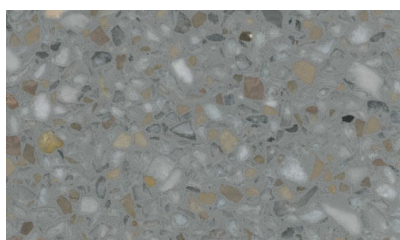


TER-07




TER-08




TER-09

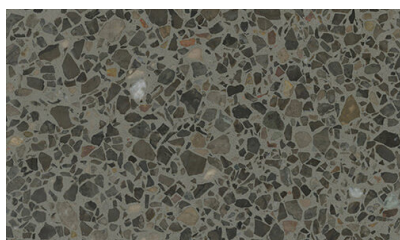

TER-10

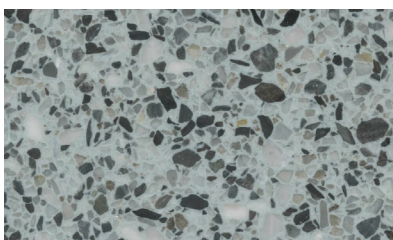

TER-11

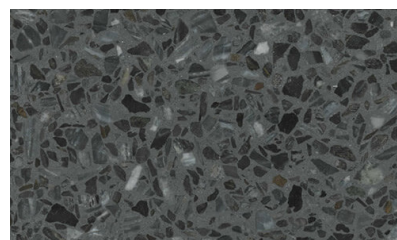

TER-12

Printed samples represent actual finish colours as closely as possible. Colour appearance may vary by texture, lighting and method of application. Always request a textured sample before ordering.

Durex® Epotel Terrazzo

Epoxy Based Terrazzo Flooring System



Ideal For

- Office Complexes
- Airports & Government Offices
- Educational & Healthcare Institutions

When to use


- Highly Durable Decorative Floor with Low Life Cycle Cost

Features

- Durable Decorative Flooring
- Low Maintenance - Easy to Clean
- Chemical & Stain Resistant
- Weighs less than Traditional Terrazzo
- Wide & Customizable Colour Range (solid and mixed colours)

Colour Availability

- Pre-Blended Aggregates

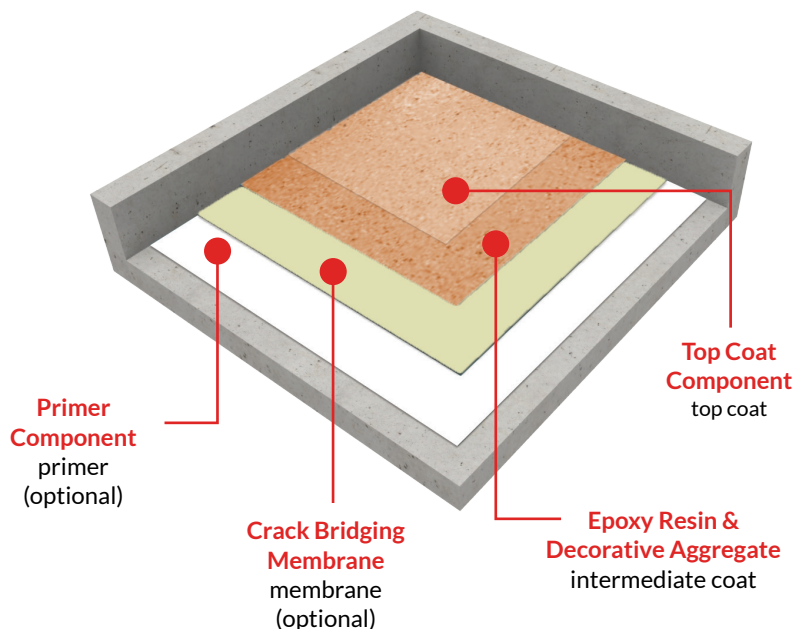

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Epotel Moisture Block OR Epotel Multi-Prime	-	-	-
MEMBRANE OPTIONAL	Uraflex 345 (Crack Bridging Membrane)	40 mils	40 ft ² /Gal	10°C to 30°C
INTERMEDIATE COAT	Epotel Terrazzo + Decorative Aggregate	1/4" - 3/8"	8 - 12 ft ² /Gal	10°C to 30°C
TOP COAT	Acrutel 100 OR Durathane 90	-	-	-





Protect. Enhance. Outperform.



The recommendations and information in this chart/document are for the application of Durex® products manufactured by Durabond, and are based on practical knowledge for general site conditions and uses. This chart is to be used as a reference guide only to identify and display the various products for general, non-site specific applications for a variety of installations. Differences in site conditions, preparations, materials are continuously variable and unknown.

As such, no warranty, guarantee or legal binding relationship is implied whatsoever with these products and systems and no guarantee can be made to their performance. In addition, preparation and condition of the substrate is of such utmost importance that a Durabond Technical Representative must be notified prior to installation of any of the aforementioned products and/or systems.

An installer must always prepare the surface to the recommendations found on the current data sheet of each product written and produced by Durabond Technical Coatings Limited. These data sheets can be obtained from Durabond's website, www.durabond.com, or by contacting a Technical Sales Representative directly.

TORONTO OFFICE

55 Underwriters Road, Toronto, ON M1R 3B4
T (416) 759-4474 | **F** (416) 759-4470

MISSISSAUGA OFFICE

6178 Netherhart Road, Mississauga, ON L5T 1B7
T (905) 565-9283 | **F** (905) 565-9365

WESTERN CANADA OFFICE

14604 124 Ave NW, Edmonton, AB T5L 3B3
T (780) 451-6364 | **F** (780) 453-9056

TOLL FREE

TF 1 877 387-2266 | **E** info@durabond.com

durabond.com