


Durex® Flexlite Select MF

*Flexible Moisture Managed EIFS
(Mechanically Fastened)*

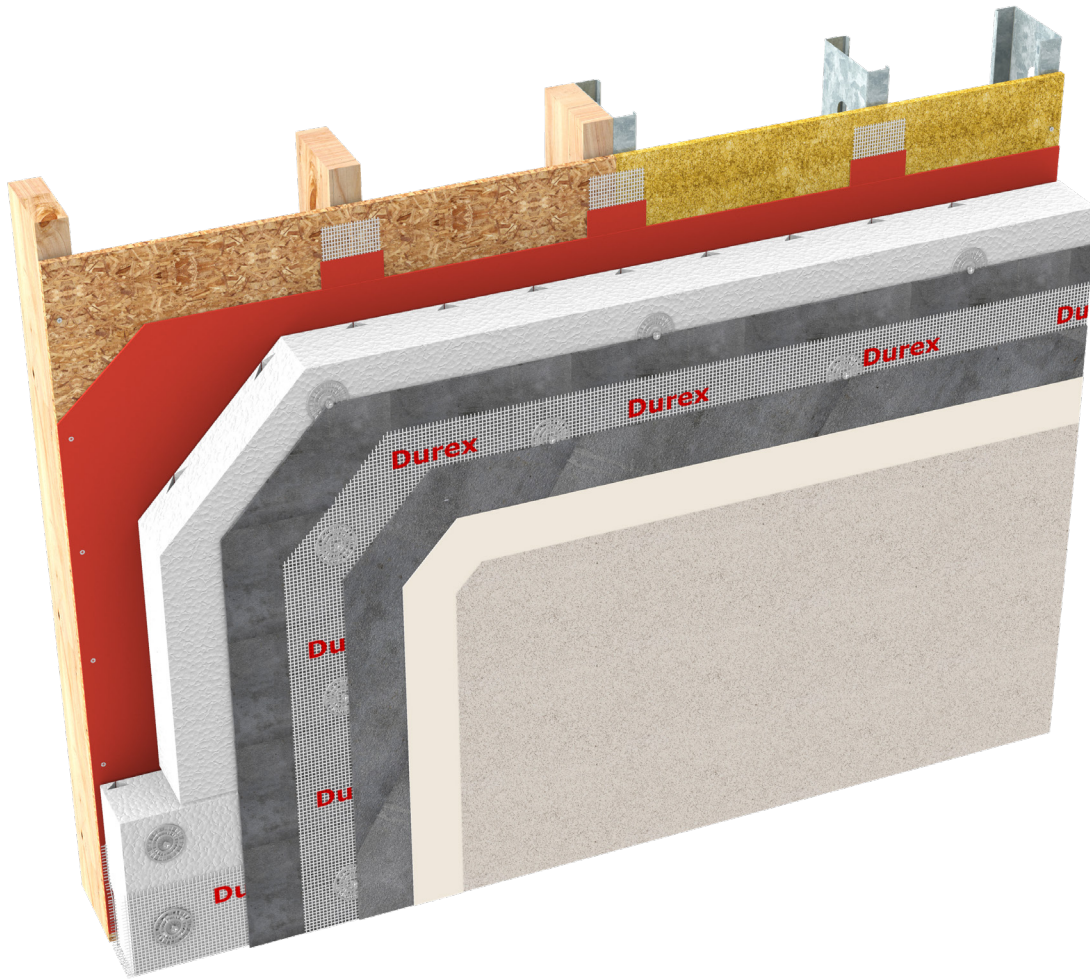

CCMC 13103-R
CAN/ULC S716.1 Materials
CAN/ULC S716.2 Installations
CAN/ULC S716.3 Design Application

G.D.D.C Factor = 15%
C.I Factor = 0.65 RSI/Inch Type 1 EPS
= 0.70 RSI/Inch Type 2 EPS



**Mechanically
Fastened**



Drained



**High Impact
Resistance**



Lightweight


Protect. Enhance. Outperform.

DURAbond 
1-877-387-2266 info@durabond.com
www.durabond.com

ISOMETRIC & SPECIFICATIONS

Durex®

Flexlite Select MF

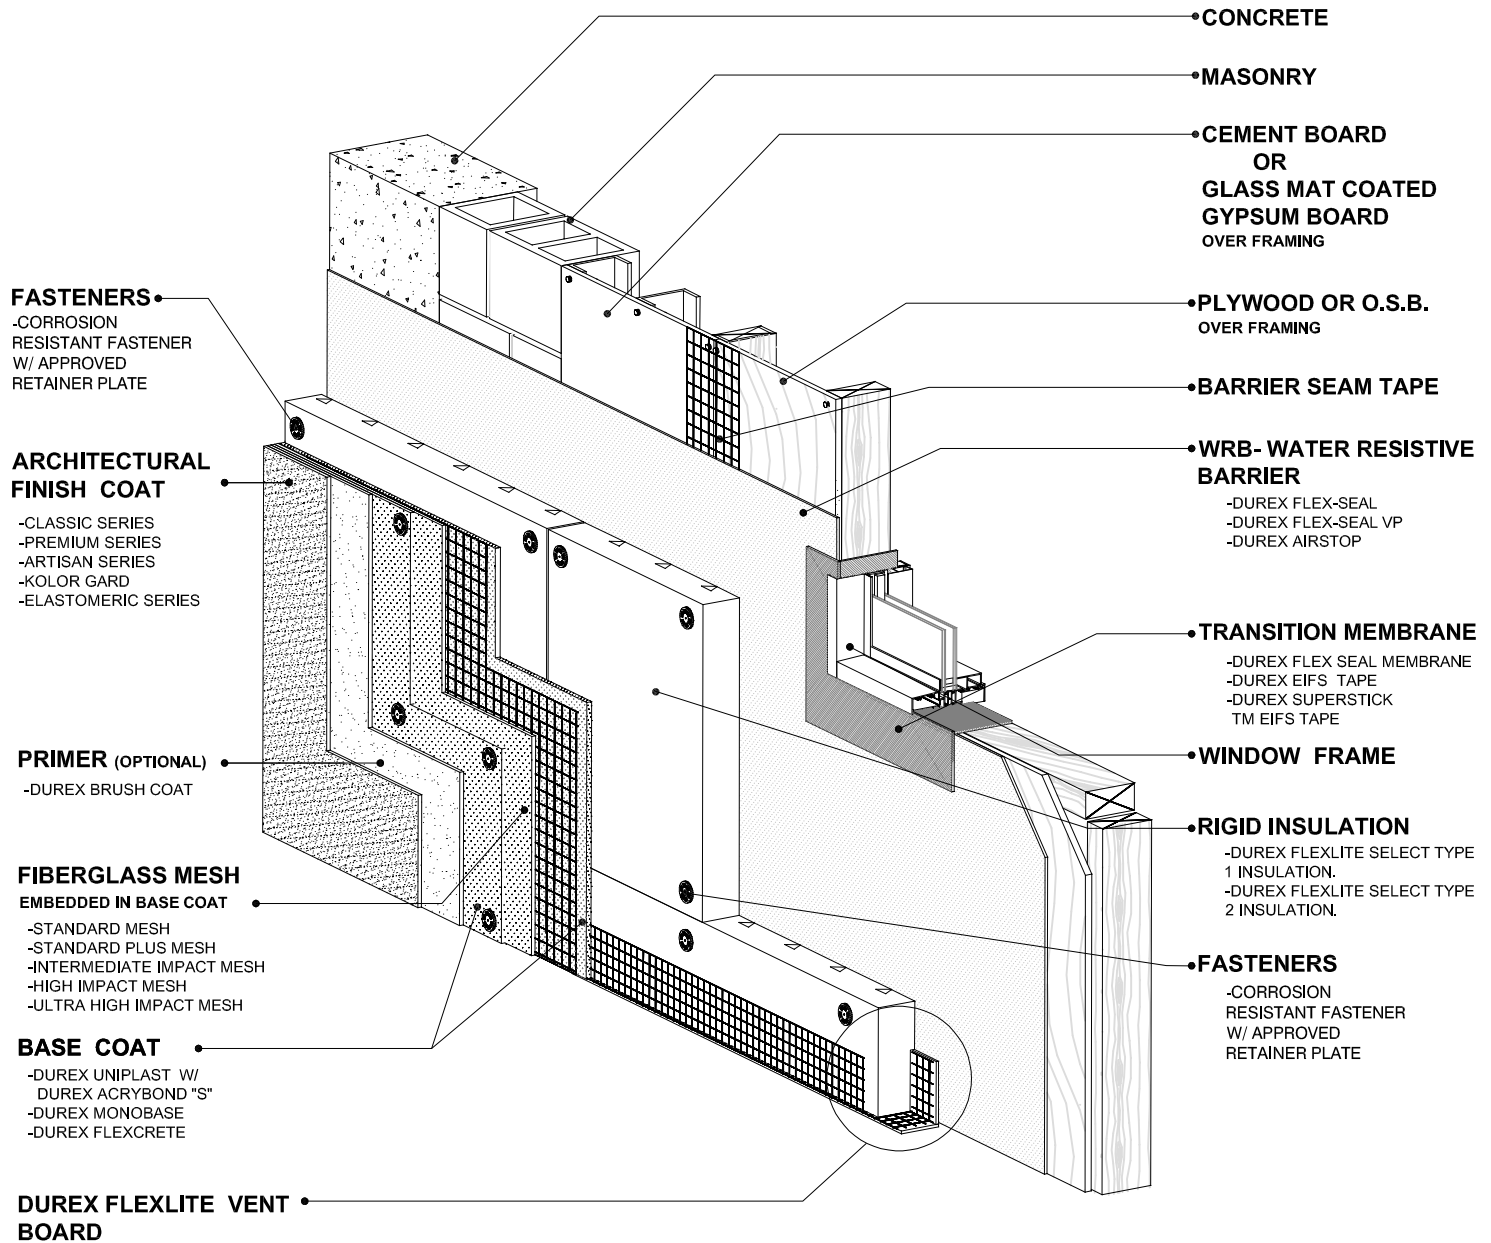

DURABOND

1-877-387-2266 - info@durabond.com - www.durabond.com

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

*System Isometric
& Components*

Durex® Flexlite Select MF

Flexible Moisture Managed EIFS (Mechanically Fastened)

Description	Durex® Flexlite Select MF is an exterior insulation and finish system consisting of a moisture barrier, a 10mm geometrically defined drainage cavity, expanded polystyrene insulation, mechanical fasteners, glass fibre-reinforcing mesh, base coats, and a finish texture coat which can be selected from any one of the available Durex Architectural Coatings.
Uses	Durex® Flexlite Select MF is primarily suitable for residential work.
Features	• CAN/ULC S716 compliant • CCMC evaluated (13103-R) • Easy installation • Positive drainage • Lightweight • Versatile • Flexible • GDDC Factor 15% (Geometrically Defined Drainage Cavity) • CI factor 0.65 RSI (R 3.9) per inch Type I EPS (Continuous Insulation) • CI factor 0.70 RSI (R 4.0) per inch Type II EPS (Continuous Insulation)

TECHNICAL DATA

SYSTEM COMPONENT	STANDARD/METHOD	RESULTS			
INSULATION:		Thermal Resistance	GDDC Factor		
Durex Flexlite Select Type I	CAN/ULC S701	0.65 RSI (R 3.9) per inch	15%		
Durex Flexlite Select Type II		0.70 RSI (R 4.0) per inch	15%		
WATER RESISTIVE BARRIER:					
Air / Vapour Barriers		Method A	Method B		
Durex Flexseal	ASTM E96 – Water Vapour Transmission		2.9 ng/Pa.s.m ²		
Durex Flexseal VP					
Air Barriers	(Refer to product specific Technical Data Sheet for more detailed data)	629 ng/Pa.s.m ²	972 ng/Pa.s.m ²		
Durex Flexseal VP		185 ng/Pa.s.m ²	505 ng/Pa.s.m ²		
Durex AirStop					
INSULATION ATTACHMENT:					
-Durex “M” fasteners (masonry)	ASTM B-117 – salt spray	750 hrs. or better			
-Durex “W” fasteners (wood)	DIN 50012 - SO ₂ exposure	25+ cycles			
-Durex “S” fasteners (steel)	FM4470 & DIN 50018 SFW	30 cycles Pass			
LAMINA:		Retention Physical	Retention Performance		
Impact Resistance	ASTM E2486 – Impact Resistance				
Durex Fiberglass Mesh		Standard 3 N.m	10 N.m	PASS	
(Note: Impact resistance level is directly related to the weight and layers of Fiberglass mesh used in the lamina)	(Refer to Table 1.5.9 of the Flexlite Select MF Specifications for detailed selection chart for guidance on level of impact resistance required)	Intermediate 8 N.m	15 N.m	PASS	
		High 13 N.m	20 N.m	PASS	
		Ultra High 20 N.m	30 N.m	PASS	
		Extreme 25 N.m	40 N.m	PASS	
Base Coat					
Durex Monobase	CAN/ULC S114 Noncombustibility	Rated Noncombustible			
Durex Flexcrete					
FINISHES:					
Durex Architectural Coatings	CAN/ULC S716.1 & CCMC Report # 13103-R	Durex Architectural Coatings Meet and exceed all requirements			
Classic Series					
Premium Series					
Artisan Series	(Refer to product specific Technical Data Sheet and CCMC Evaluation Report # 13103-R for more detailed data)				
Kolor Gard Series					
Elastomeric (FX) Series					

PERFORMANCE: (Refer CCMC Evaluation Report # 13103-R for complete detailed performance data)		
Fire Protection	CAN/ULC S134 (Compliance to NBC 3.1.5.5)	Intertek listing # DPL-WEIFS 30-01
Wind Load Resistance	ASTM E330 – sustained ASTM E330 – cyclic ASTM E330 – blow-out	-2.5 kPa for 60min. – no visible damage to any of the wall components 600 cycles alt. 0 to -2.5kPa – no visible damage to any of the wall components -3.75kPa applied for 10 sec. – no visible damage to any of the wall components - max. pressure 7.12 kPa
Water Tightness	ASTM E331	400 Pa pressure difference for 15 min. – no water penetration through the exterior surface finish
System Compliance	CCMC Technical Guide for EIFS CAN/ULC S716.1 EIFS Materials & System	CCMC Evaluation Report # 13103-R Durex Flexlite Select MF is fully compliant with: CAN/ULC S716.1 Materials & System CAN/ULC S716.2 Installation of Components & WRB CAN/ULC S716.3 Design Application

Building Code Conformance:

Durex® Flexlite Select MF complies with the following building code requirements (refer to applicable building code)

Classification	Category 2 CAN/ULC S134	Fire Test of Exterior Wall Assemblies
Part 3	Article 3.1.5.5 Article 3.1.5.2 Article 3.2.3.7 & Table 3.2.3.7	Combustible Cladding on Exterior Walls Allowable Minor Combustible Components >10% Unprotected Openings
Part 5	Section 5.6.1 Sub-Section 5.6.2.1 Section 5.9.4	Protection from Precipitation Sealing and Drainage Exterior Insulation Finish Systems
Part 9	Clause 9.25.2.2(1)(d) Sub-Section 9.25.5.2 Clause 9.27.1.1(5) Section 9.27.2 Article 9.27.3.1 Sub-Section 9.27.13 Article 9.10.14.5 & Table 9.10.14.5 (A) Article 9.10.15.5	Insulation Materials CAN/ULC S701 Position of Low Permeance Membranes General (Cladding, Application) Required Protection from Precipitation Elements of Second Plane of Protection Exterior Insulation Finish Systems <10% Unprotected Openings <0.6 m Limiting Distance

Application	Apply all Durex System Products and components, (WRB, insulation, fasteners, base coat, reinforcing mesh, finish coat, sealants) in strict accordance with Durabond's printed instructions. See Durabond's Standard Specifications/Details and Durex Product Data Sheets.
Clean-up	Clean all tools promptly after use with clean water. Do not allow mixes to dry on tools.
Storage	Store all Durex® Products and components in a dry vented, waterproof location, stacked off the ground with ambient temperatures above 5°C (41°F). Keep materials dry, protected from dampness and moisture and away from direct sunlight. KEEP FROM FREEZING.
Health and Safety	For information and advice on the safe handling, storage and disposal of chemical products, refer to the most recent SDS sheet containing physical, environmental, toxic and other safety/materials handling data. For industrial use only. Keep out of reach of children.
Warranty	Durabond Products Limited fully warrants their products when used and applied in strict accordance with the printed instructions on product mixing and product application. In any case Durabond's responsibility shall not exceed either the refund of the purchase price or the replacement of the purchased product.
Technical Services	Technical support is available upon request at info@durabond.com . For the latest version of this data sheet, please visit our website at www.durabond.com , call toll free at 1-877-DURABOND (387-2266) or speak with your Durabond Products Ltd. sales representative.

