

Durex® Dur-A-Flake

Decorative Seamless Chip Flake Epoxy Floor System



Ideal For

- Decorative Flooring applications subject to high traffic - commercial and retail applications
- Institutional Floors
- Health Care facilities and Laboratories
- Residential applications - residential garages

When to use


- Easy to Install, Economical, High Abrasion Decorative Floor

Features

- Economical and durable floor with excellent colour retention properties
- Contaminant Resistant - salt and light chemicals
- CFIA approved
- Does not support fungi or bacterial growth
- Limitless Colours Selections

Colour Availability

- Customizable, Pre-Blended Colour Flakes

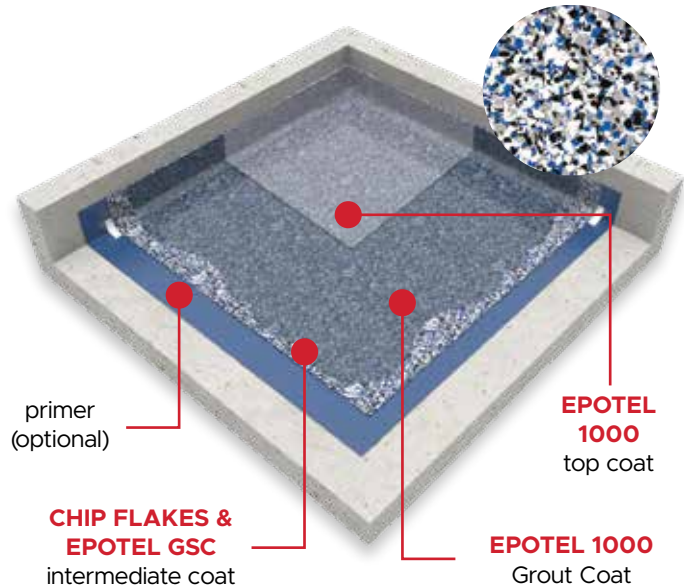


COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER OPTIONAL	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	Chip Flakes + Epotel GSC	15 mils	100 ft ² /Gal	10°C to 30°C
GROUT COAT	Epotel 1000	5 - 10 mils	160 - 320 ft ² /Gal	10°C to 30°C
TOP COAT	Epotel 1000 or Durathane 90 or Acrutel 100 or Polyuratel	5 mils	320 ft ² /Gal	10°C to 30°C

Decorative Floor Coating Options

Use this chart to choose the necessary components for the performance requirements of your system.

Primer Options

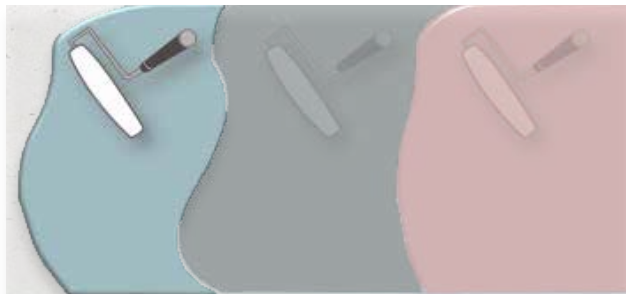

PRIMER OPTION	ADVANTAGES / USE
Epotel Moisture Block	<p>Advantage: Moisture Mitigating (Blocking) Primer</p> <p>Use: For Concrete Slabs with high moisture content and freshly poured slabs (over 14 days old).</p> <p>Coverage: 72 ft²/Gal @22 mils 95 ft²/Gal @17 mils</p>
Uraflex Citrus Primer	<p>Advantage: Penetrating Primer that adheres to oil and similar contaminants</p> <p>Use: For oil or grease contaminated floors</p> <p>Coverage: 200 ft²/Gal @6 mils DFT</p>
Epotel Multi-Prime	<p>Advantage: Penetrating Primer. VOC Free</p> <p>Use: For better adhesion onto concrete</p> <p>Coverage: 200 ft²/Gal @8 mils DFT</p>
Epotel 80	<p>Advantage: Solvent Based Penetrating Primer</p> <p>Use: For better adhesion onto concrete</p> <p>Coverage: 250 ft²/Gal @7 mils DFT 400 ft²/Gal @4 mils DFT</p>

Top Coat Options



TOP COAT OPTION	ADVANTAGES / USE
Acrutel 100	<p>Advantage: Easy to Apply Sheen Control & Abrasion Resistant Topcoat Available in <i>Matte, Satin, Semi-Gloss, and Gloss</i></p> <p>Use: For Medium Traffic and Foot Traffic Applications and for sheen control on decorative floors</p> <p>Coverage: 300 ft²/Gal @3 mils DFT <i>2 coats recommended</i></p>
Durathane 90	<p>Advantage: Extremely durable UV Resistant clear topcoat. <i>High Gloss.</i></p> <p>Use: For a durable, heavy duty topcoat</p> <p>Coverage: 400 ft²/Gal @3 mils DFT <i>2 coats recommended</i></p>
Polyuratel	<p>Advantage: Virtually Odour Free Clear and Pigmented Topcoat. <i>Rapid Curing</i></p> <p>Use: For durable low odour, quick turn-around and pigmented (coloured) applications</p> <p>Coverage: 320 ft²/Gal @5 mils DFT <i>2 coats recommended</i></p>