

Durex® Dur-A-Quartz Broadcast

Broadcasted Coloured Quartz Flooring System



Ideal For

- Institutional Building
- Showers, Locker Rooms and Wash Down Areas
- Hospitals and Health Care Buildings

When to use

- Institutional, High Abrasion Spaces
- Decorative Commercial Floors


Features

- Multi-Tone Decorative Flooring
- Low Maintenance - Easy to Clean
- Quick Installation

Colour Availability

- Pre-Blended Aggregates
- Custom Blends Available

For exterior use, or high UV exposure, please contact your Durabond Technical Representative

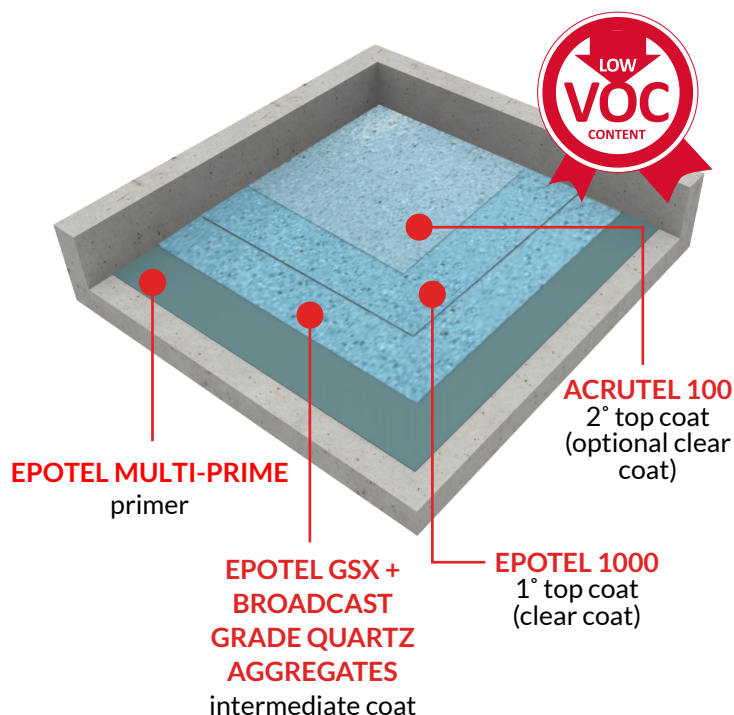

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Epotel Multi-Prime	8 mils	200 ft²/gal	10°C to 30°C
INTERMEDIATE COAT	Epotel GSX + Coloured Quartz	30 mils	54 ft²/Gal	10°C to 30°C
		1/16" - 1/8"	1.5 - 2 lbs/ft²	10°C to 30°C
	Can be completed in 2 Coats at 15 mils + 0.75 lbs/ft² per coat			
1° TOP COAT	Epotel 1000	10 - 20 mils	80 - 120 ft²/Gal	10°C to 30°C
*2° TOP COAT OPTIONAL	Acrutel 100	5 mils	300 ft²/Gal	10°C to 30°C

*See topcoat chart for different topcoat options.