Durex®
Insulite Select MF

Advanced High Thermal Resistance Drainage & Moisture Managed EIFS (Mechanically Fastened)

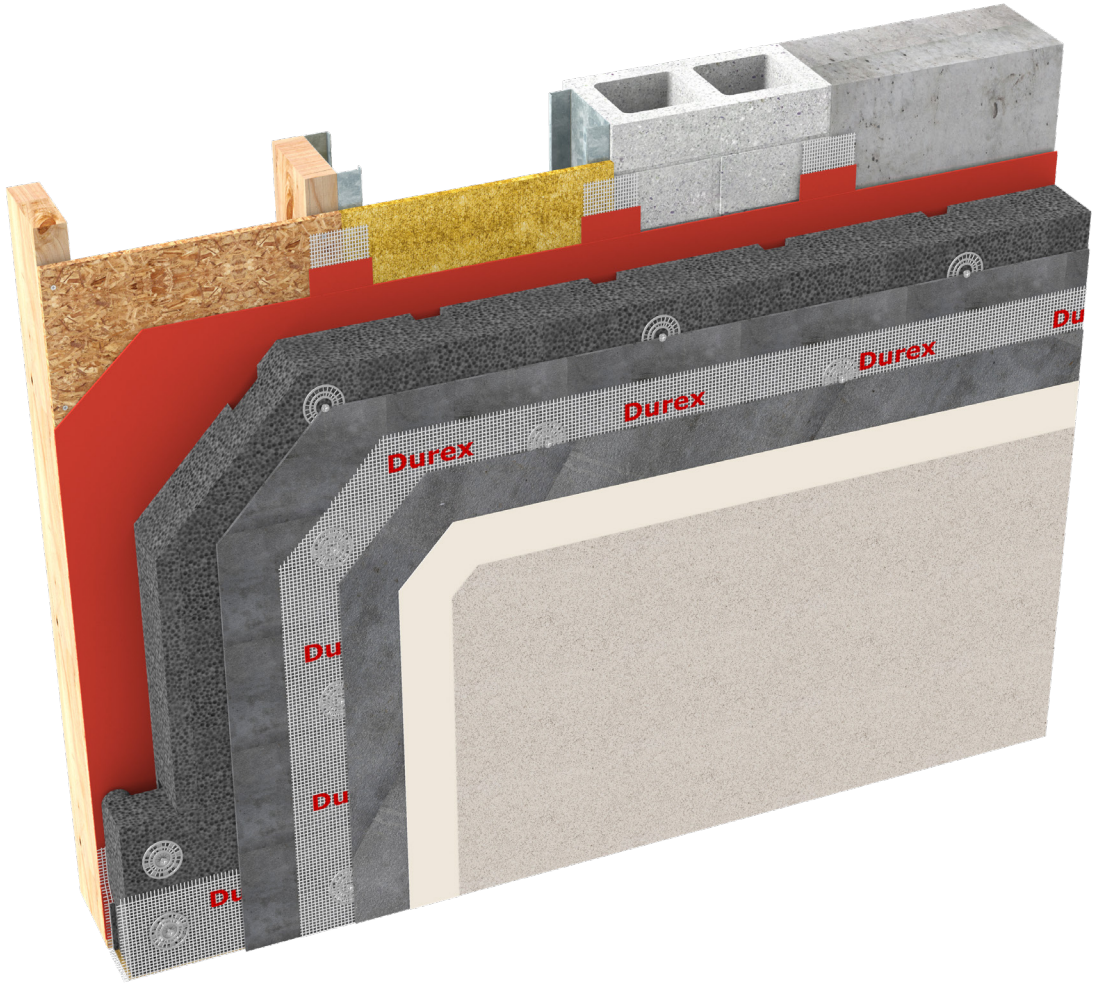

CCMC 13103-R
CAN/ULC S716.1 Materials
CAN/ULC S716.2 Installations
CAN/ULC S716.3 Design Application

G.D.D.C Factor = 25%
C.I Factor = 0.80 RSI/Inch

- Non- Combustible
- LEED Commpliant
- High Insulation Value
- Cost Effective

Protect. Enhance. Outperform.

DURabond 50 YEARS 1967–2017
1-877-387-2266 info@durabond.com
www.durabond.com

SYSTEM DETAILS

Durex®
Insulite Select MF

High Thermal Resistance EIFS Graphite EPS
GDDC Drainage - Mechanically Fastened

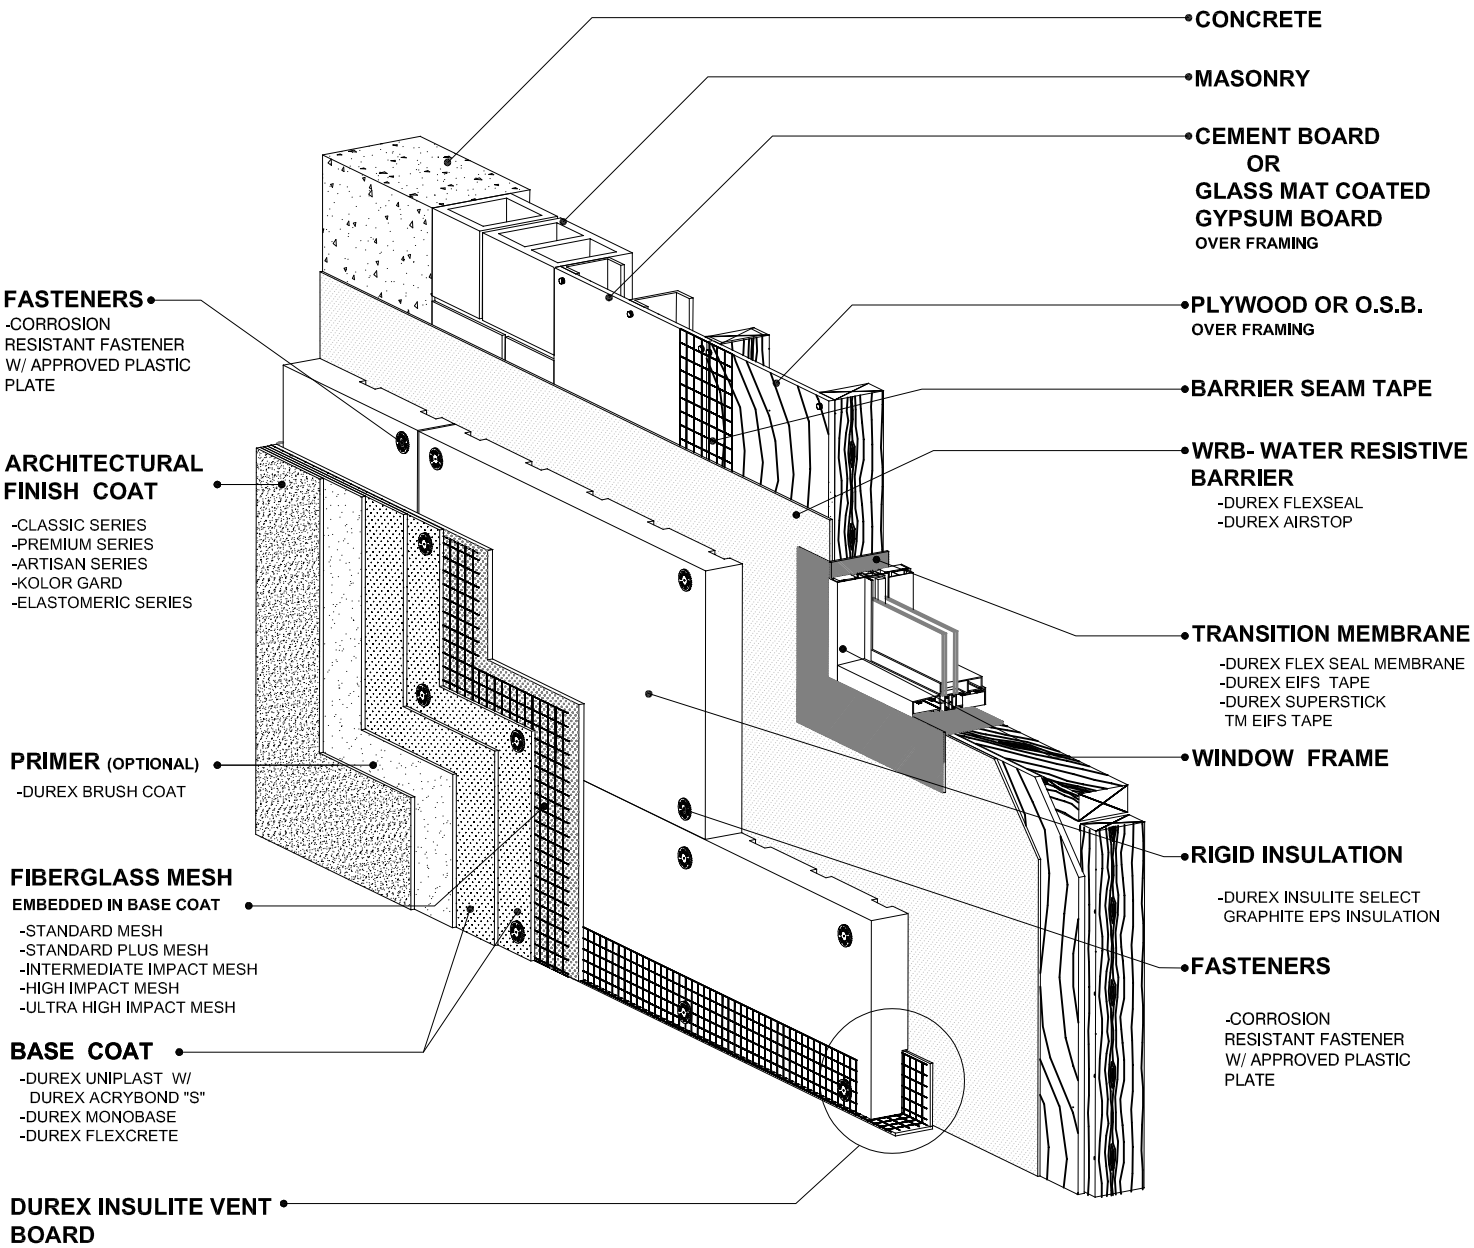

DURABOND
1-877-387-2266 - info@durabond.com - www.durabond.com

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

System Isometric & Components

INSULITE SELECT MF

ISMF_SGA_DET102_R2

OUTSIDE CORNER DETAIL

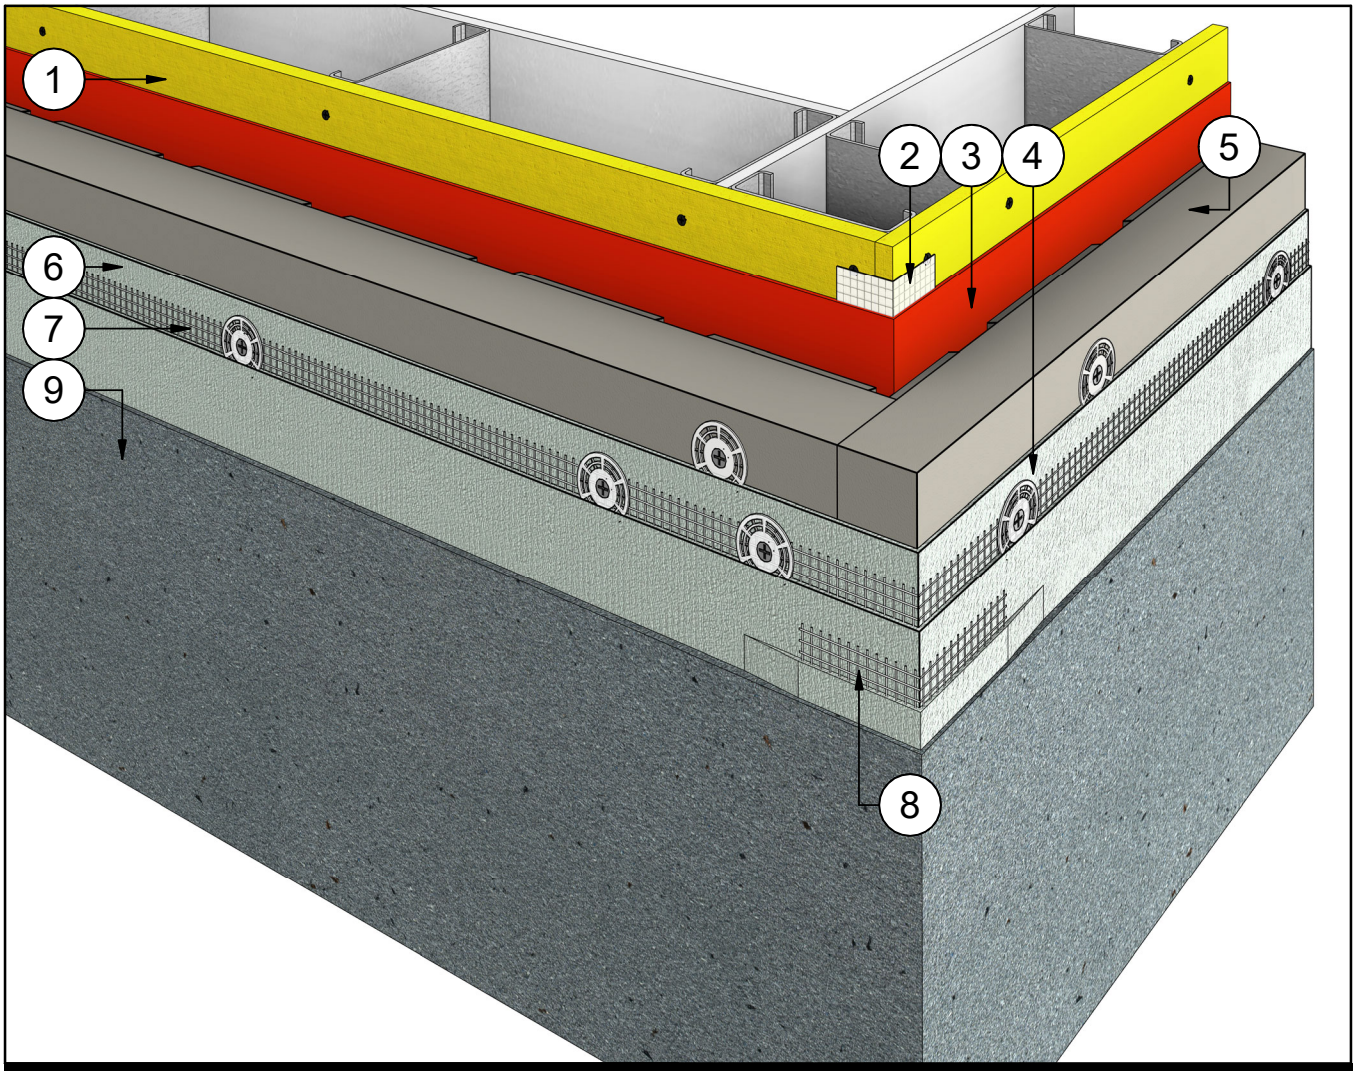

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tap (Embedded in WRB.)
3	WRB - Water Resistive Barrier
4	Insulation Fastner w/ Plate
5	Insulite Select Insulation Board
6	Base Coat
7	Fibreglass Reinforcing Mesh (Embedded in WRB)
8	Fibreglass Corner Mesh (Embedded in WRB)
9	Finish Coat

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET102_R2

OUTSIDE CORNER DETAIL

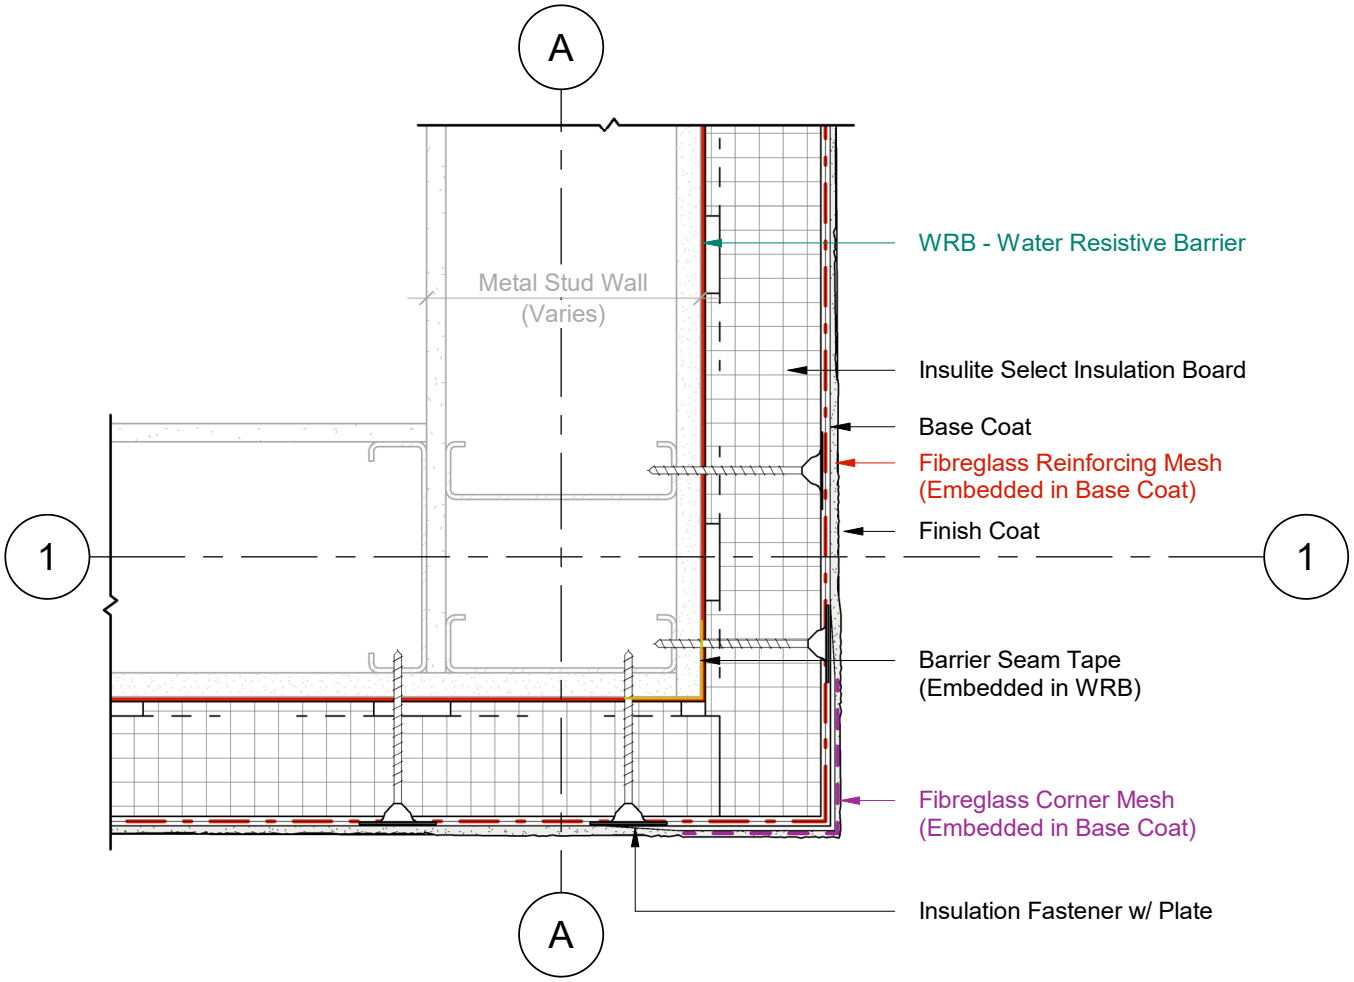

1/2 Plan Detail
Scale = 1:5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET104_R1

INSIDE CORNER DETAIL

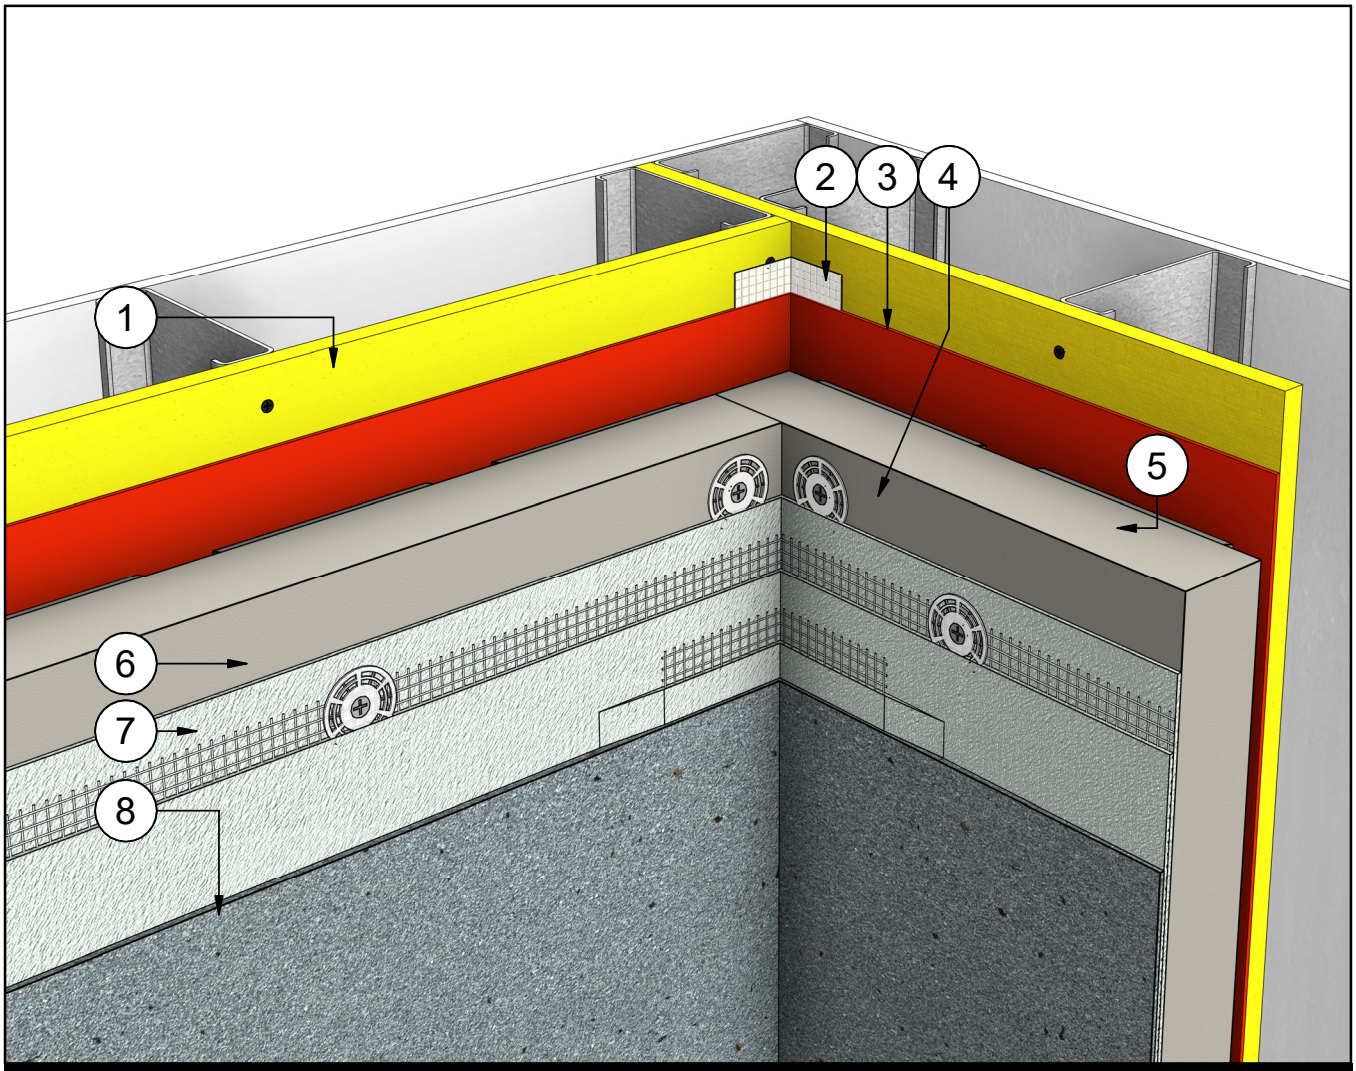

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tap (Embedded in WRB.)
3	WRB - Water Resistive Barrier
4	Fire Rated INsulation Fastener
5	Insulite Select Insulation Board
6	Base Coat
7	Fibreglass Reinforcing Mesh (Embedded in WRB)
8	Finish Coat

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET104_R1

INSIDE CORNER DETAIL

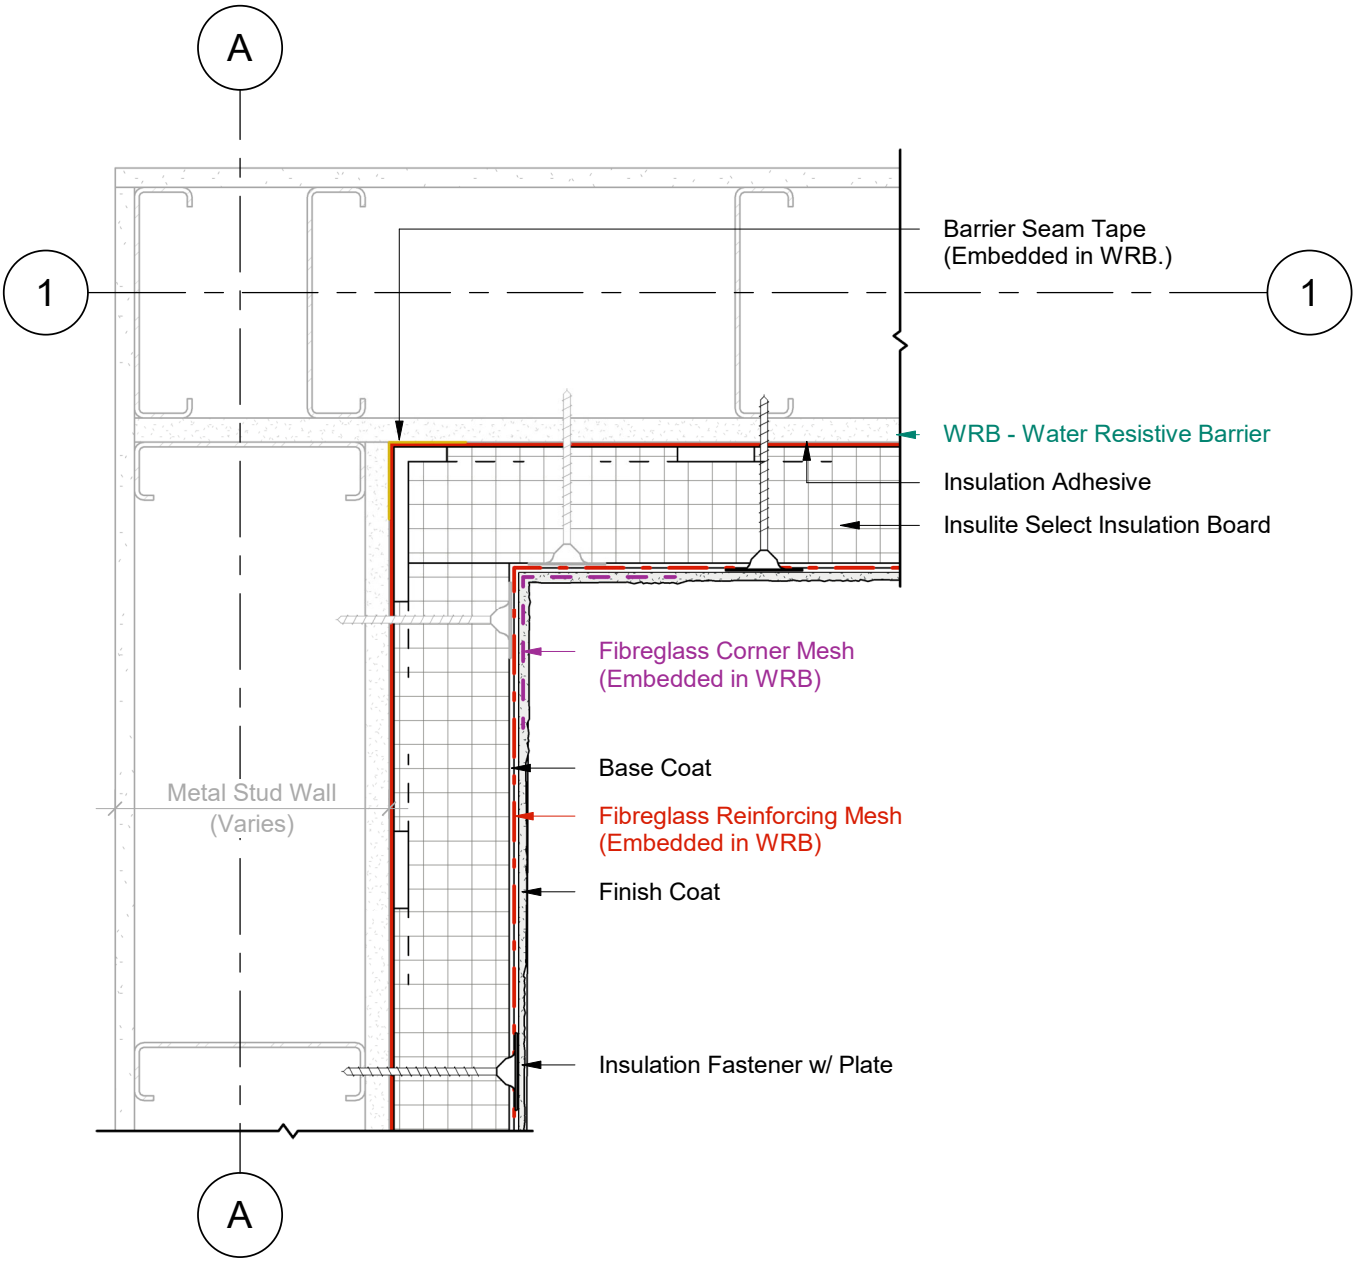

1/2 Plan Detail

Scale = 1:5

Durabond

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET106_R2

VERTICAL EXPANSION JOINT

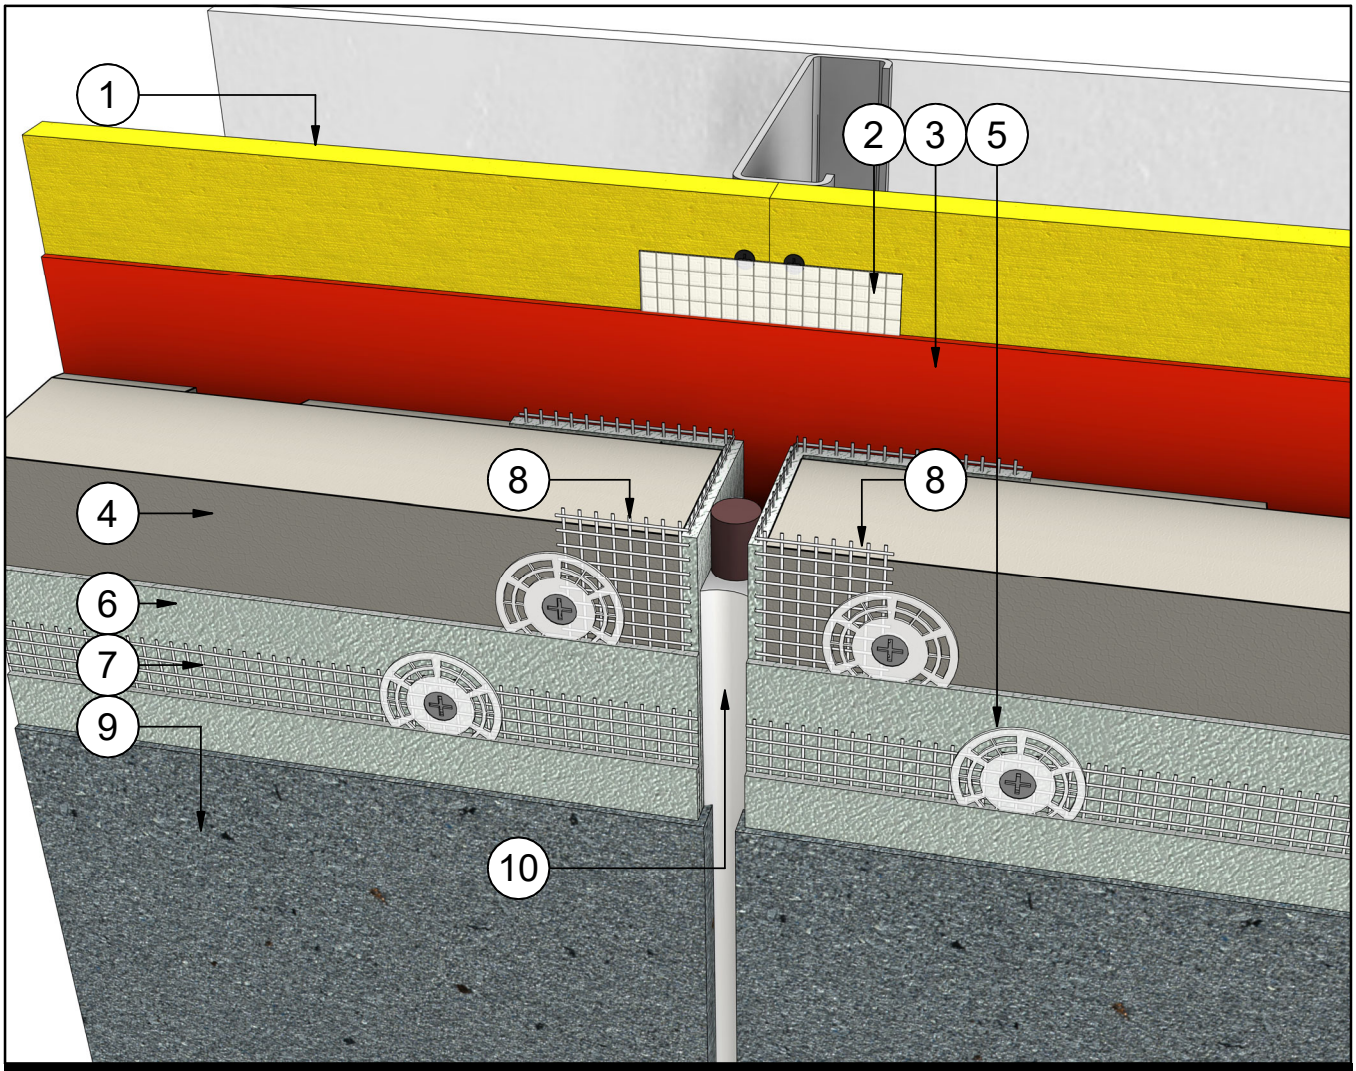

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tap (Embedded in WRB.)
3	WRB - Water Resistive Barrier
4	Insulite Sekect Insulation Board
5	Insulation Fastener w/ Plate
6	Base Coat
7	Fibreglass Reinforcing Mesh (Embedded in WRB)
8	Fibreglass Corner Mesh (Embedded in WRB)
8	Fibreglass Corner Mesh (Embedded in WRB)
9	Finish Coat
10	Backer Rod & Sealant

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET106_R2

VERTICAL EXPANSION JOINT

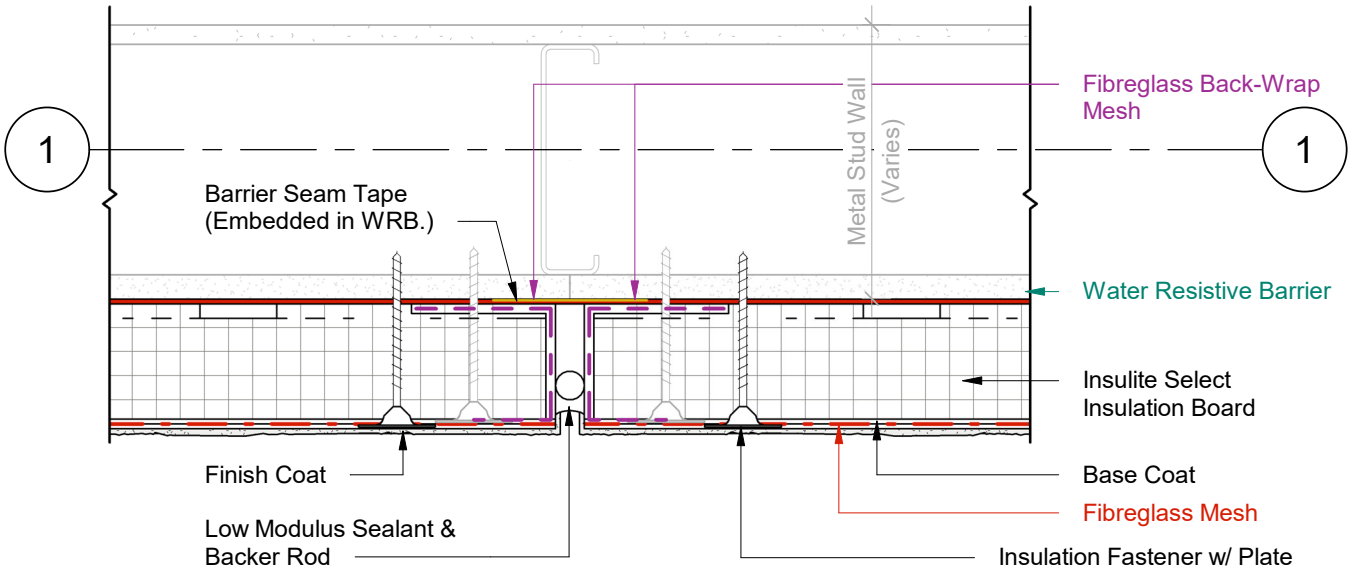

1/2 Plan Detail
Scale = 1:5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET107_R2

HORIZONTAL EXPANSION JOINT

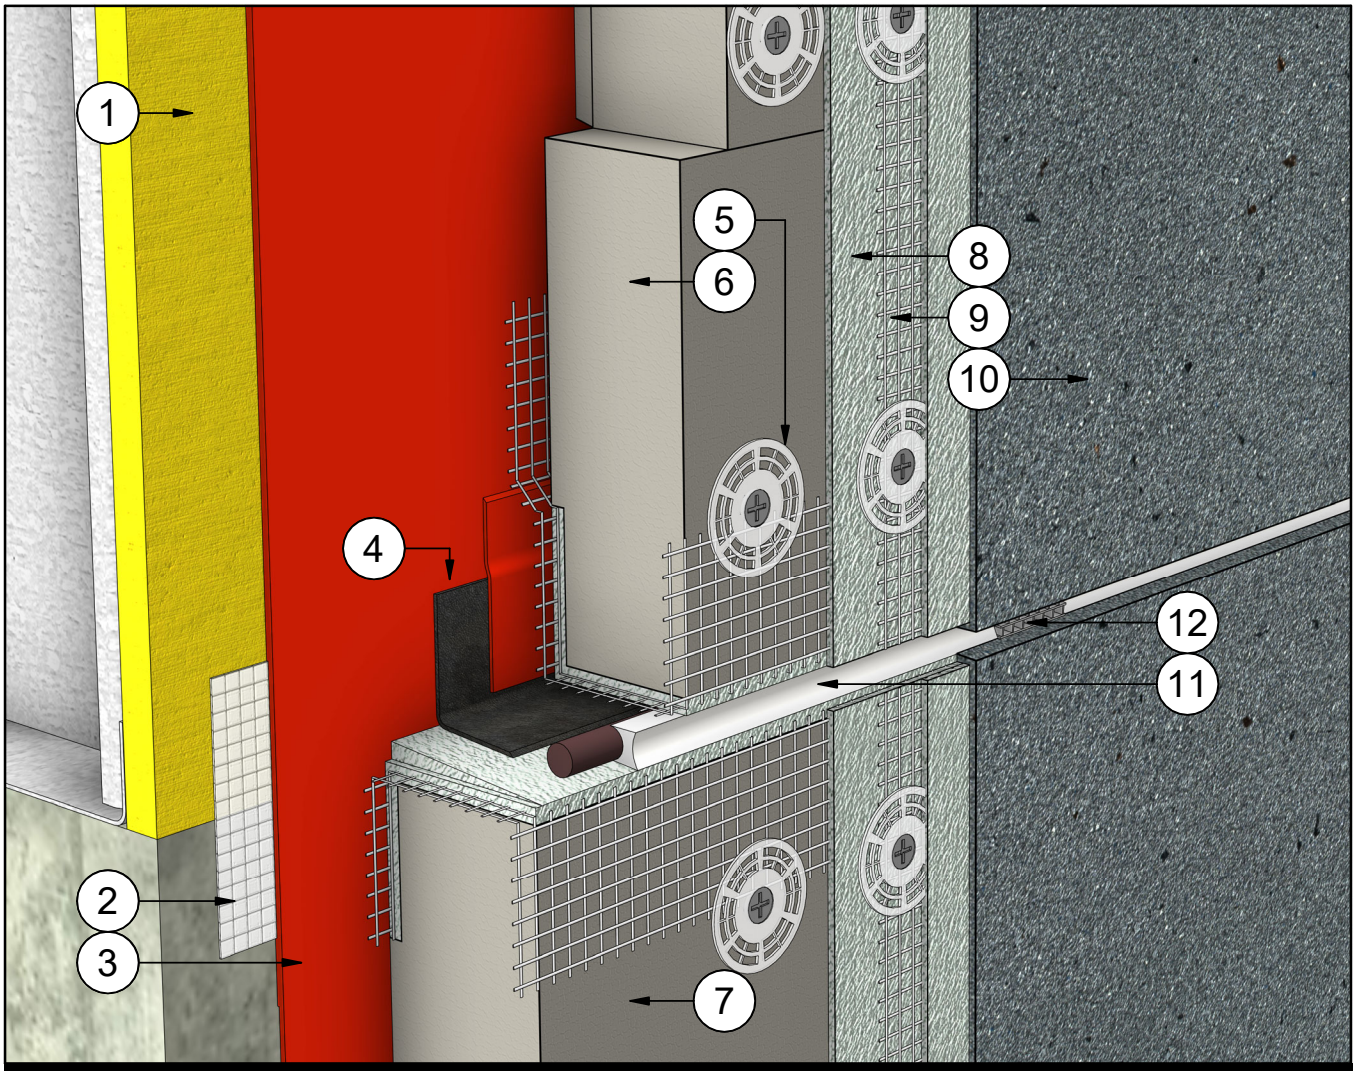

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tap (Embedded in WRB.)
3	WRB - Water Resistive Barrier
4	Tie in Membrane & Primer
5	Insulation Fastener w/ Plate
6	Insulite Select Vent Board
7	Insulite Select Boundary Board
8	Base Coat
9	Fibreglass Reinforcing Mesh (Embedded in WRB)
10	Finish Coat
11	Backer Rod & Sealant
12	Sealant Vent

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET107_R2

HORIZONTAL EXPANSION JOINT

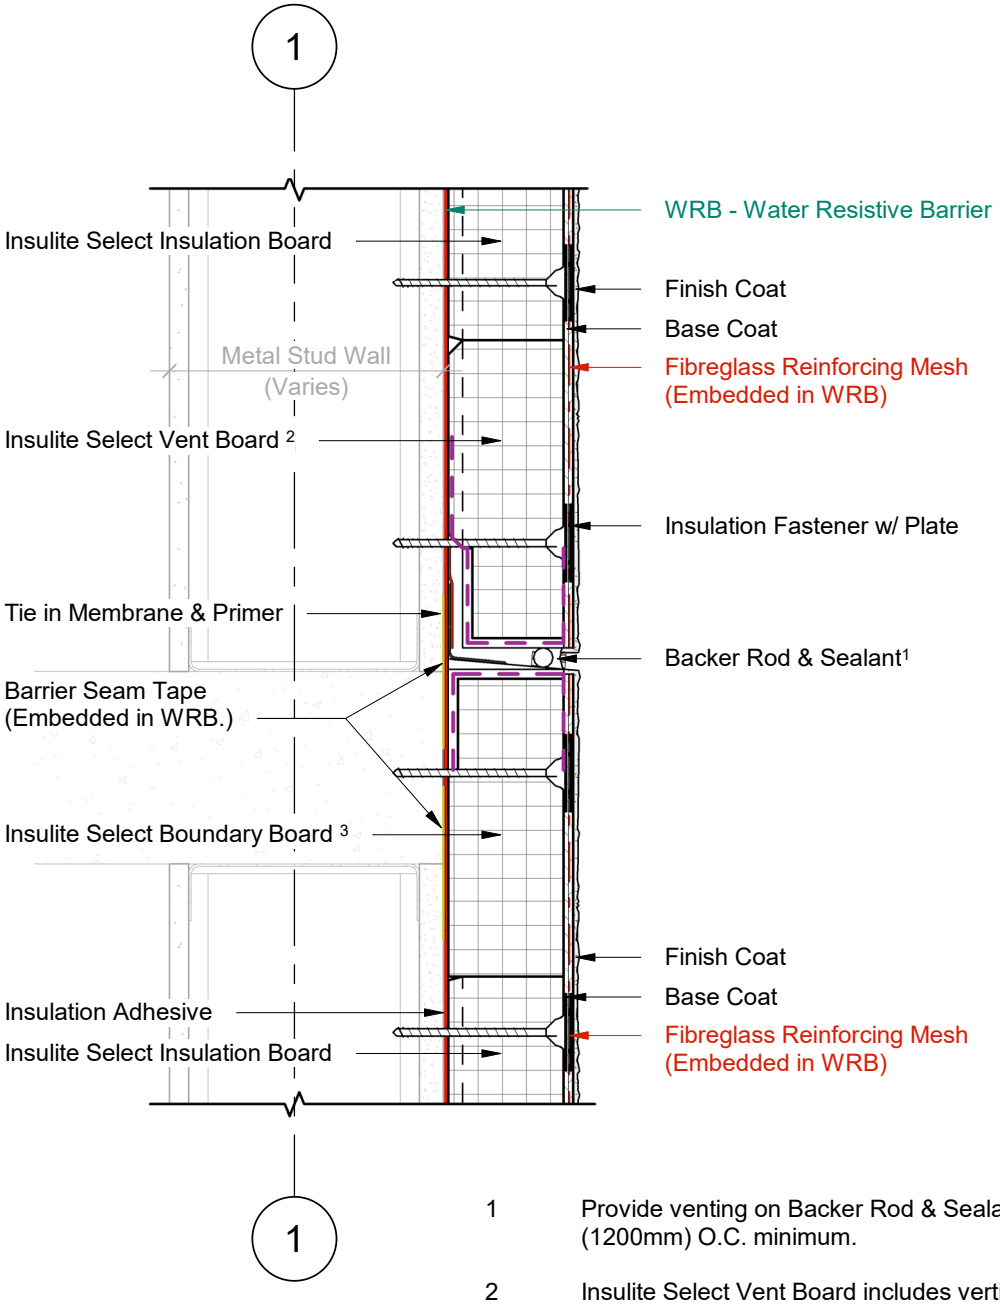

1/2 Wall Section
Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

3 Insulite Select Boundary Board includes a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

HORIZONTAL EXPANSION JOINT

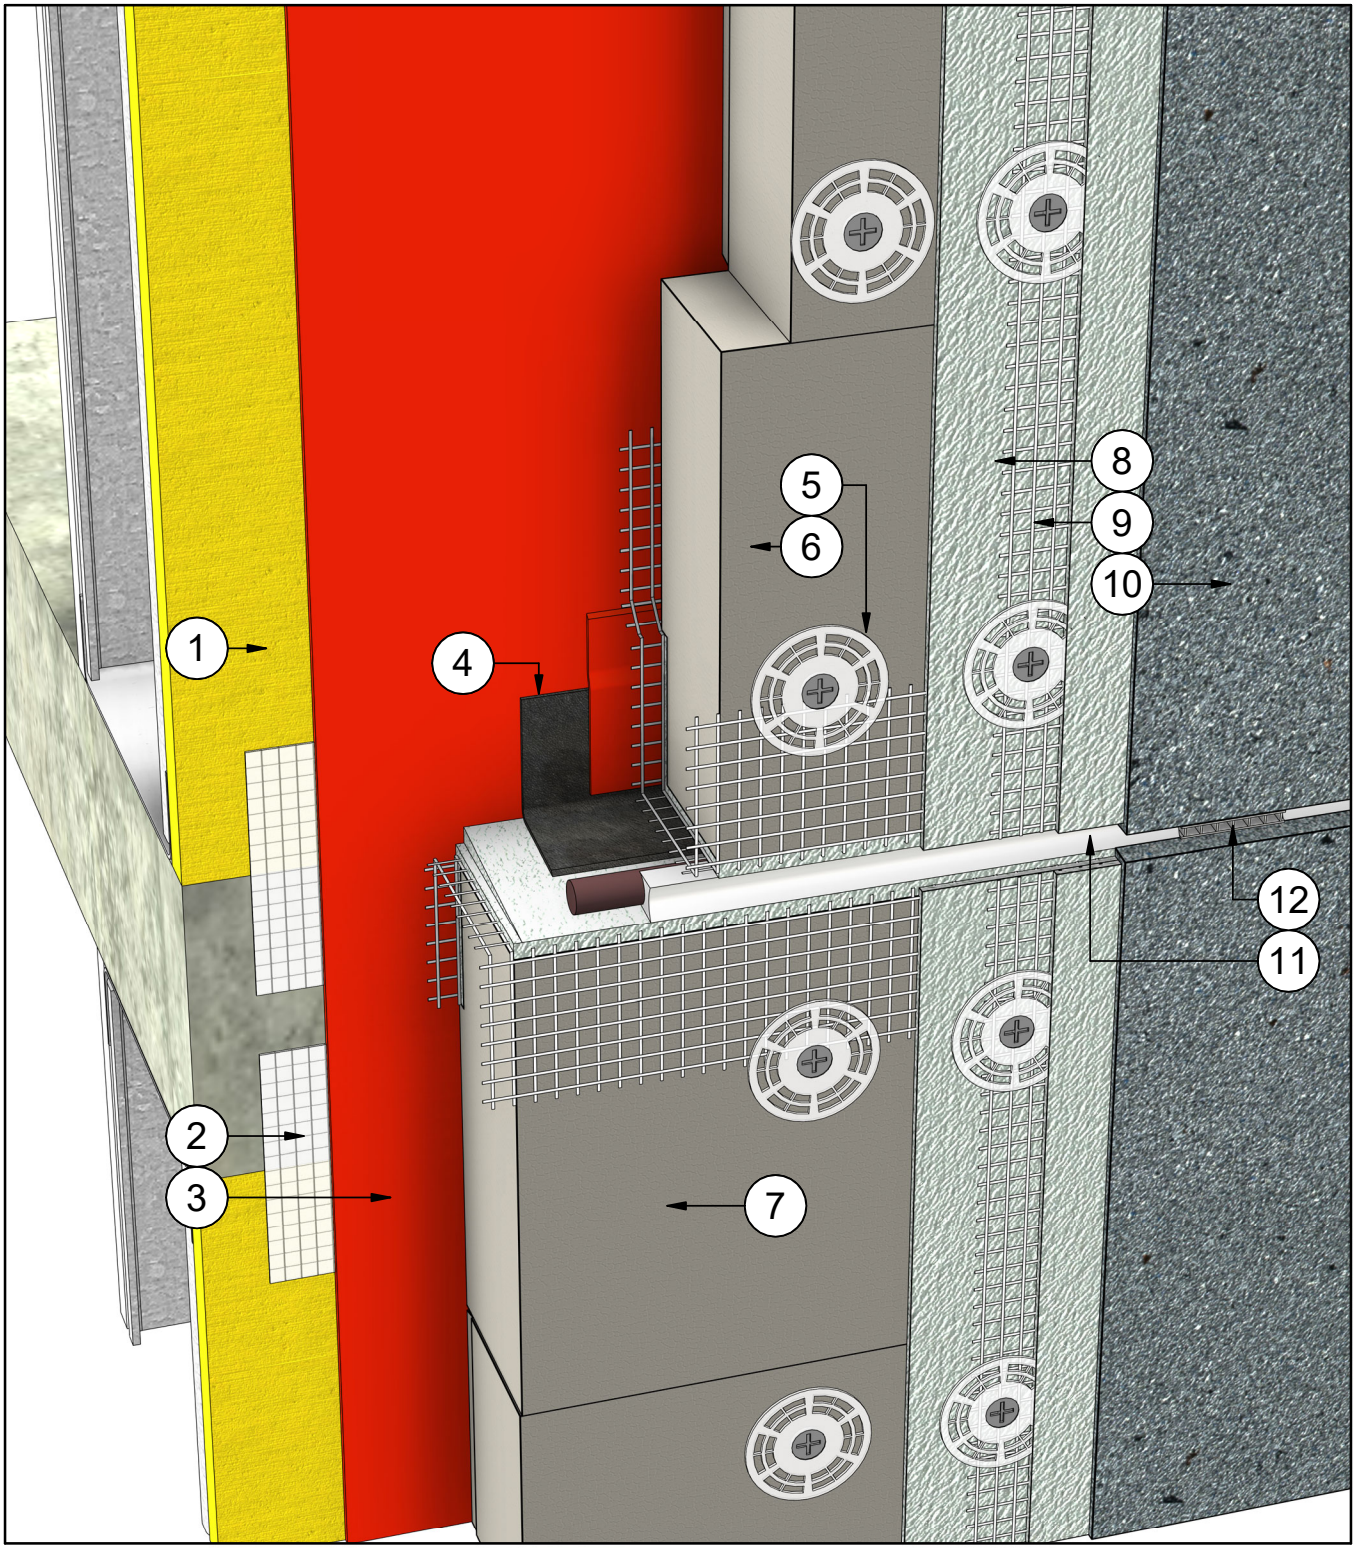

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET201_R3

TERMINATION AT MASONRY SILL

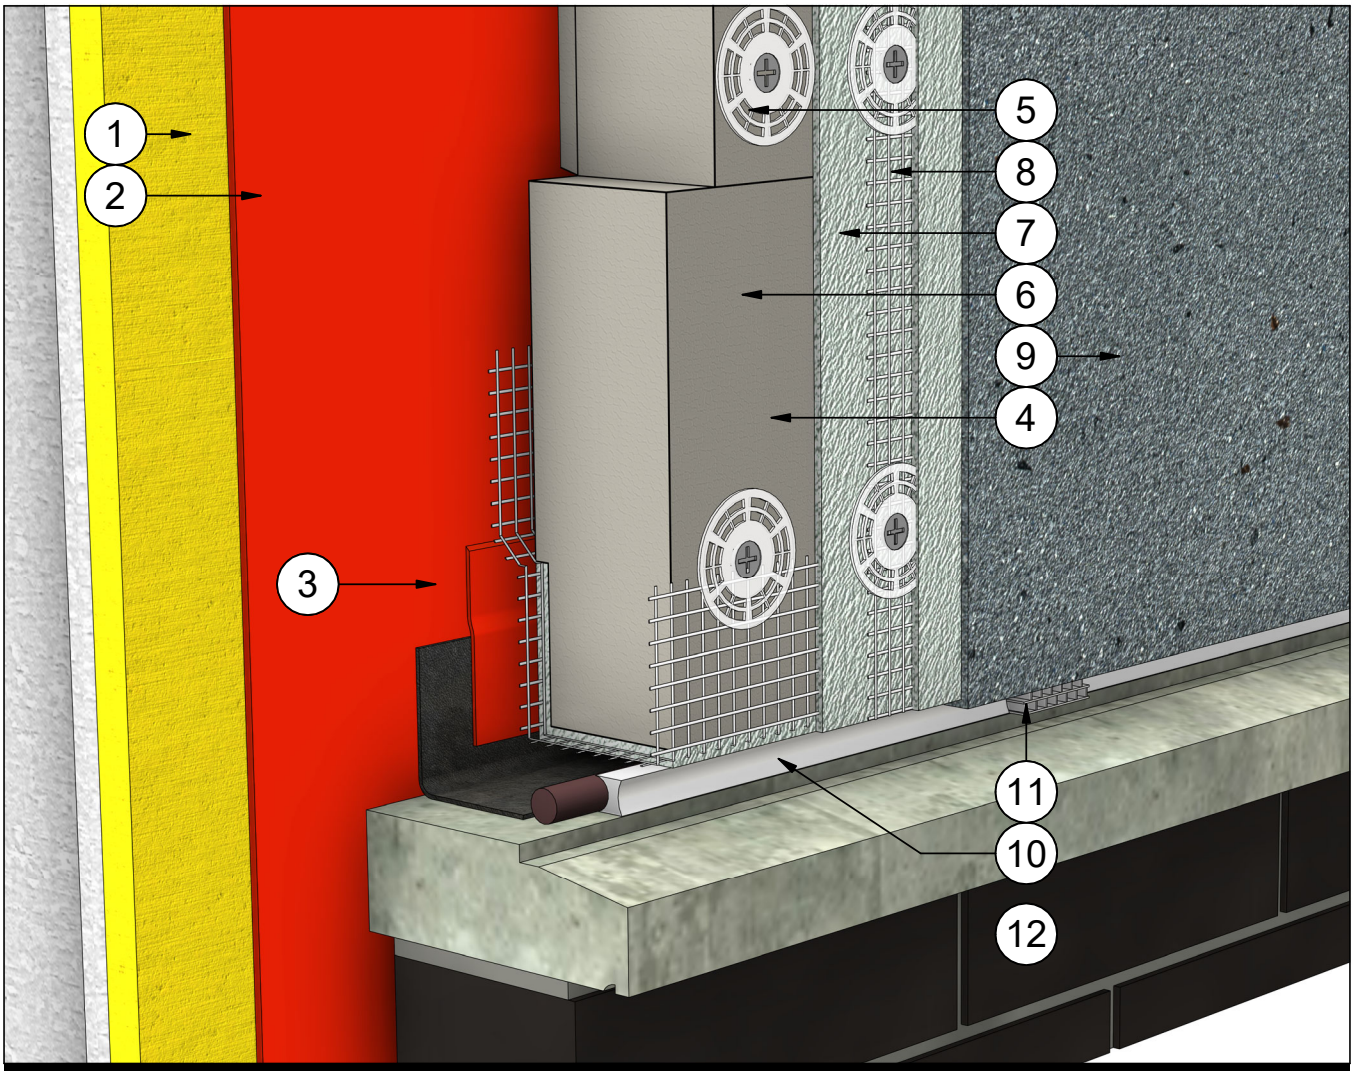

#	Note Text	#	Note Text
1	Steel Studs Framing & Sheathing	8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
2	WRB - Water Resitive Barrier	9	Finish Coat
3	Tie In Membrane & Primer	10	Backer Rod & Sealant
4	Fire Rated Insulation Fastener	11	Sealant Vent
5	Insulite Select Insulation Board	12	Alternate Cladding
6	Insulite Select Vent Board		
7	Base Coat		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET201_R3

TERMINATION AT MASONRY SILL

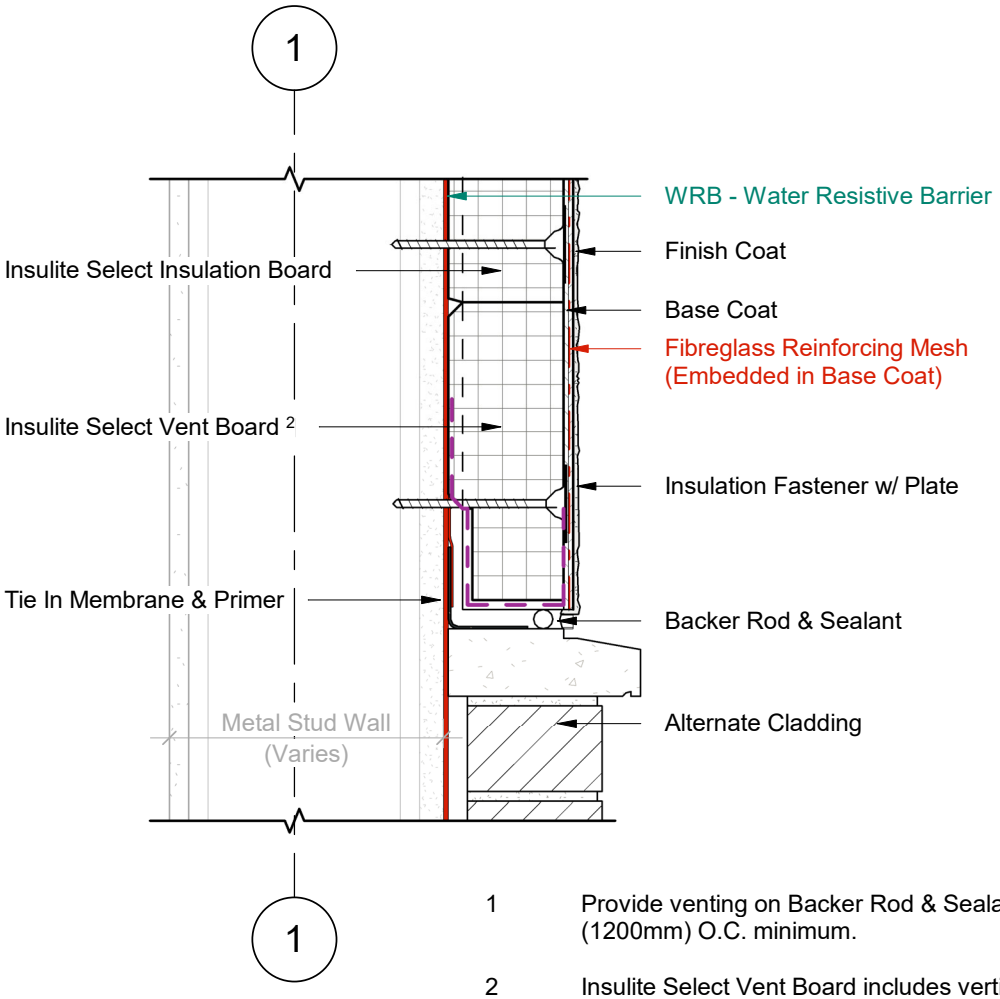

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET202_R2

TERMINATION AT CURB

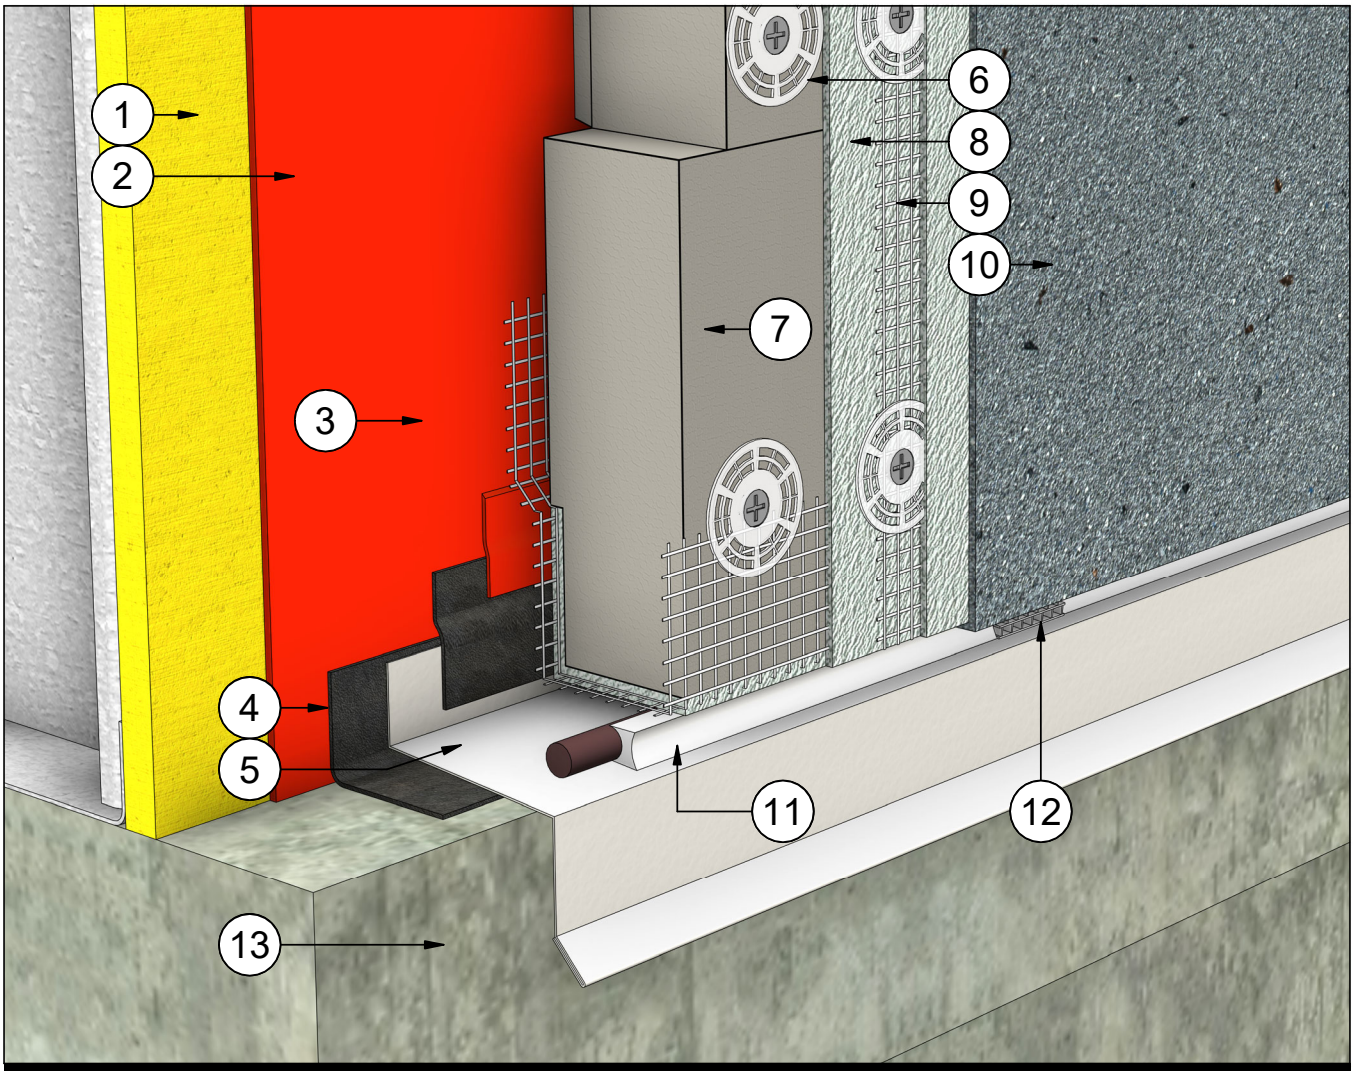

#	Note Text	#	Note Text
1	Steel Studs Framing & Sheathing	8	Base Coat
2	WRB - Water Resitive Barrier	9	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
3	Tie In Membrane & Primer	10	Finish Coat
4	Tie In Membrane	11	Backer Rod & Sealant
5	Flashing	12	Sealant Vent
6	Insulation Fastener w/ Plate	13	Curb
7	Insulite Select Vent Board		

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET202_R2

TERMINATION AT CURB

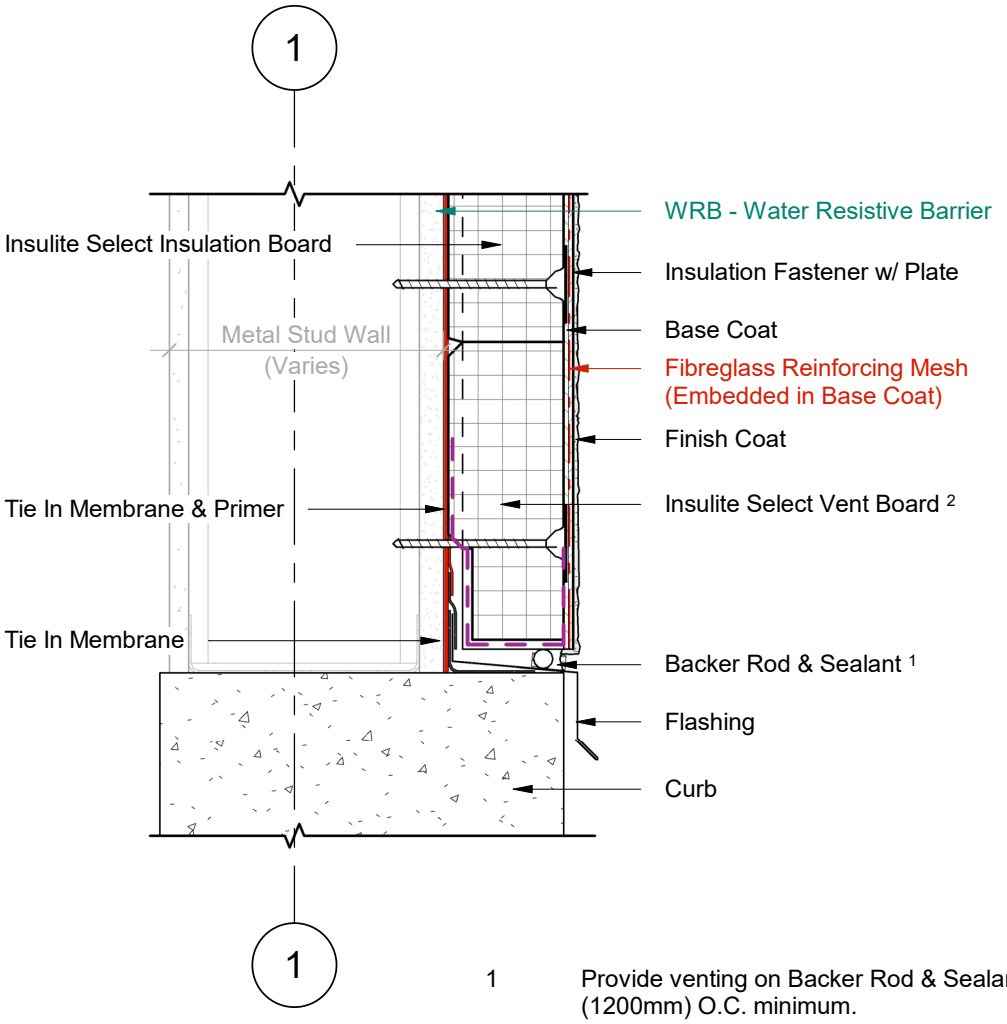

1/2 Wall Section

Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION A)

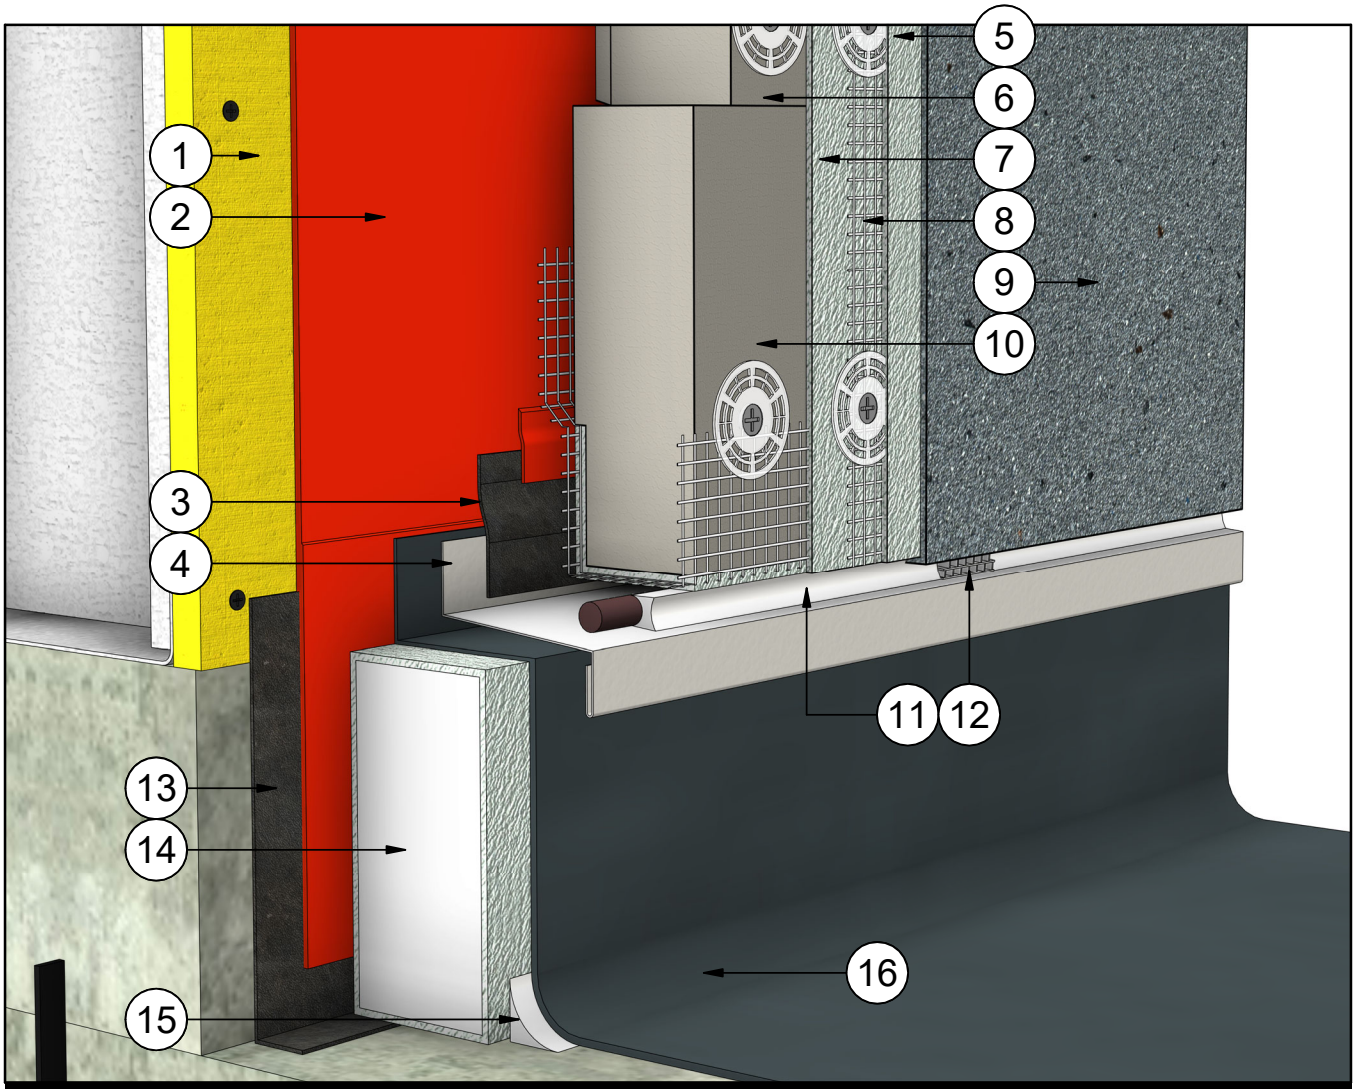

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	9	Finish Coat
2	WRB - Water Resistive Barrier	10	Insulite Select Vent Board
3	Tie In Membrane & Primer	11	Backer Rod & Sealant
4	Flashing	12	Sealant Vent
5	Insulation Fastener w/ Plate	13	Transition Membrane
6	Insulite Select Insulation Board	14	Pre Coated Boundary Board
7	Base Coat	15	Cove Sealant
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)	16	Balcony Waterproofing

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION A)

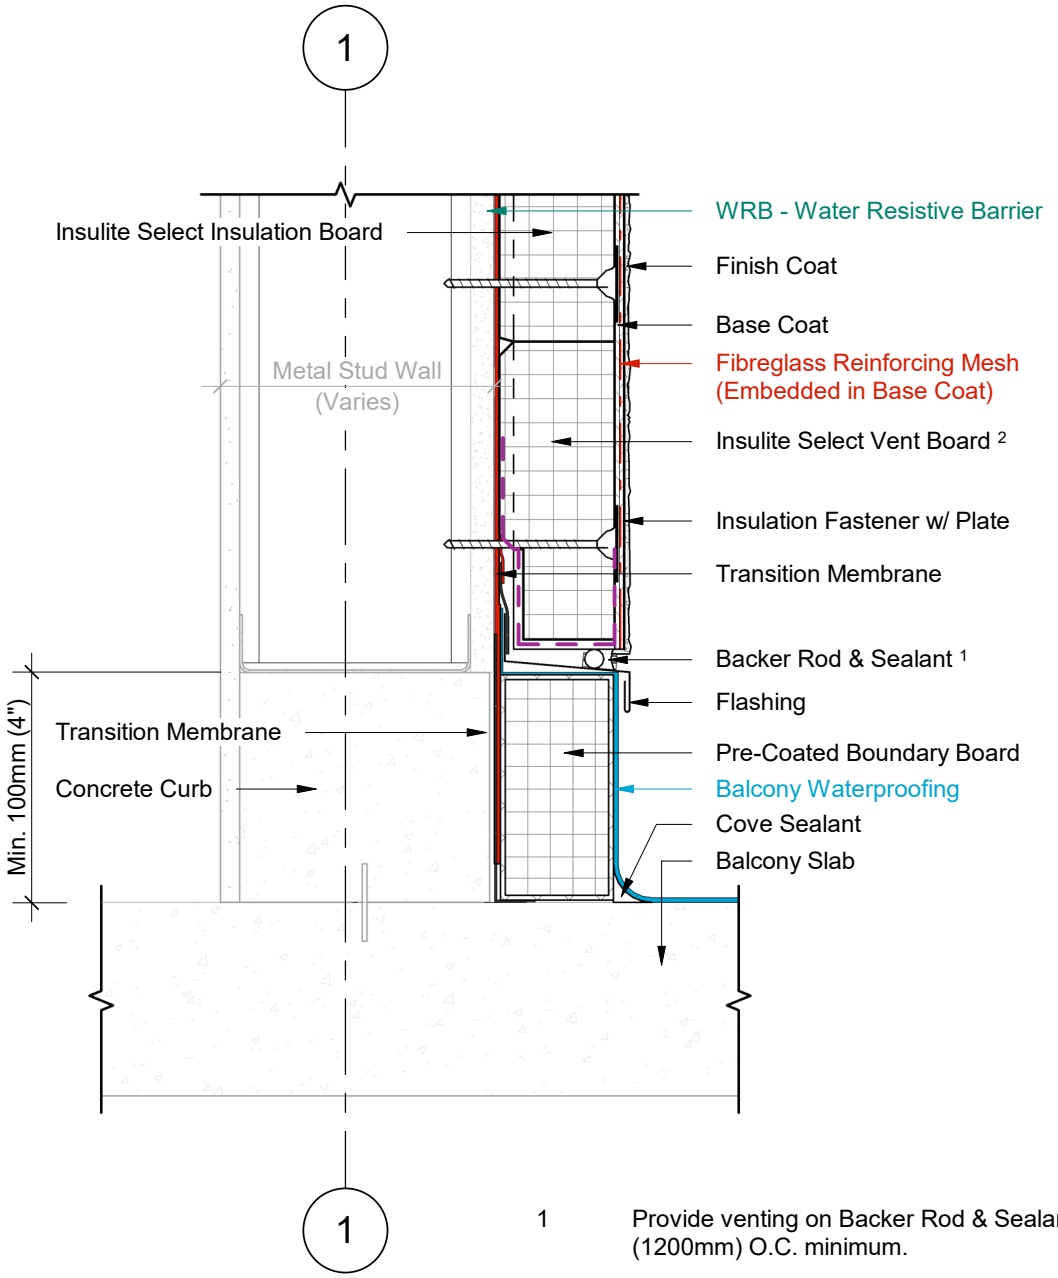

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION B)

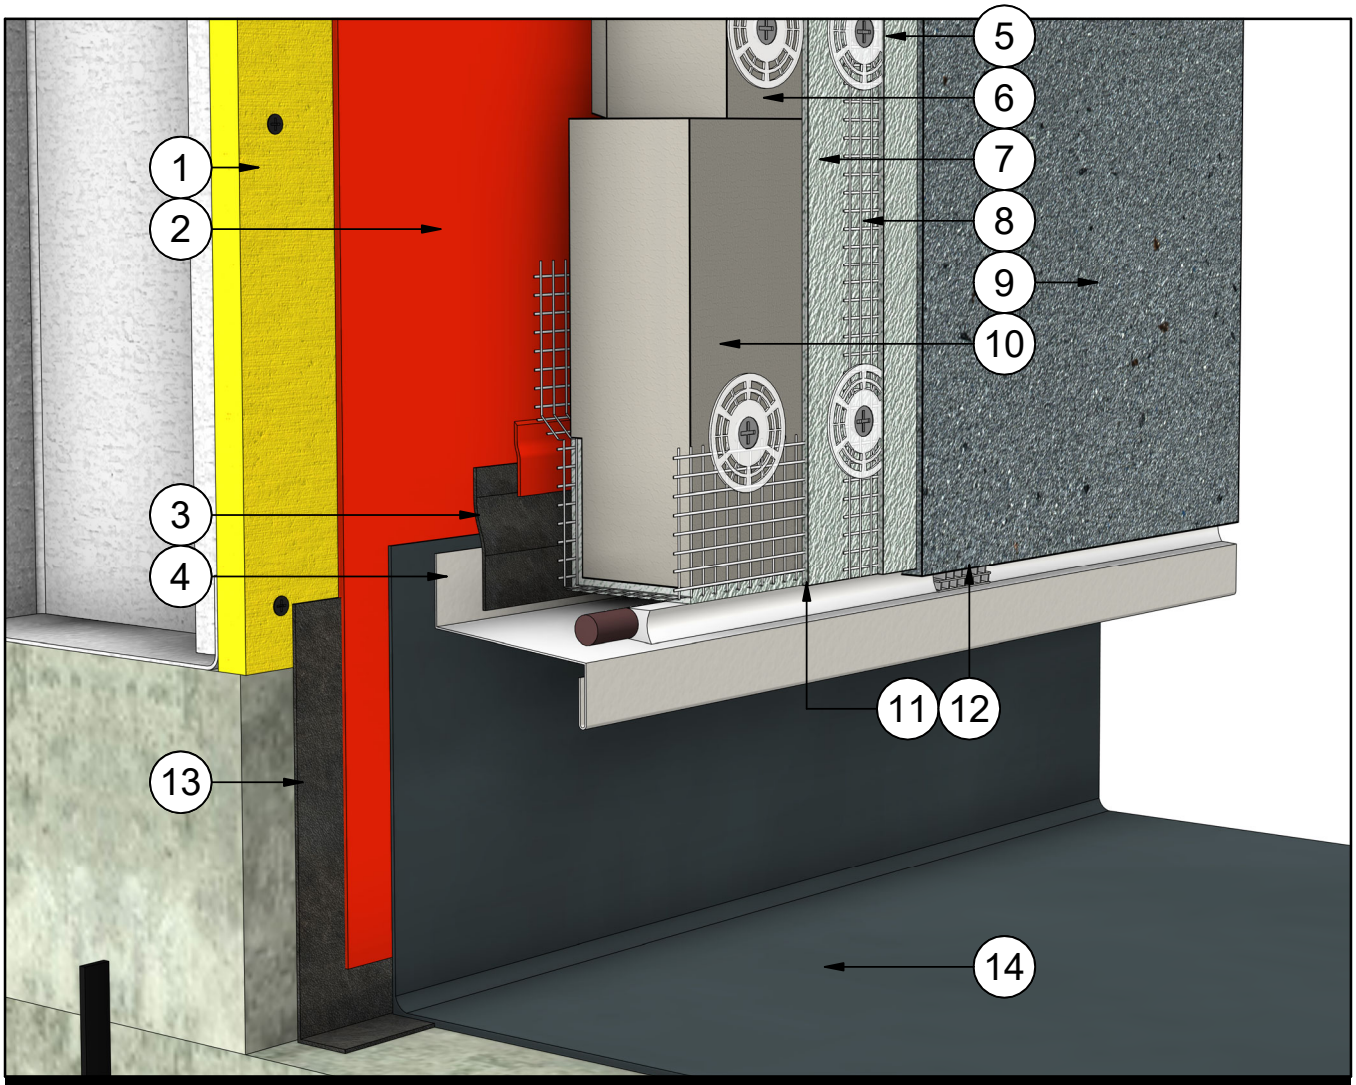

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
2	WRB - Water Resistive Barrier	9	Finish Coat
3	Tie In Membrane & Primer	10	Insulite Select Vent Board
4	Flashing	11	Backer Rod & Sealant
5	Insulation Fastener w/ Plate	12	Sealant Vent
6	Insulite Select Insulation Board	13	Transition Membrane
7	Base Coat	14	Balcony Waterproofing

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION B)

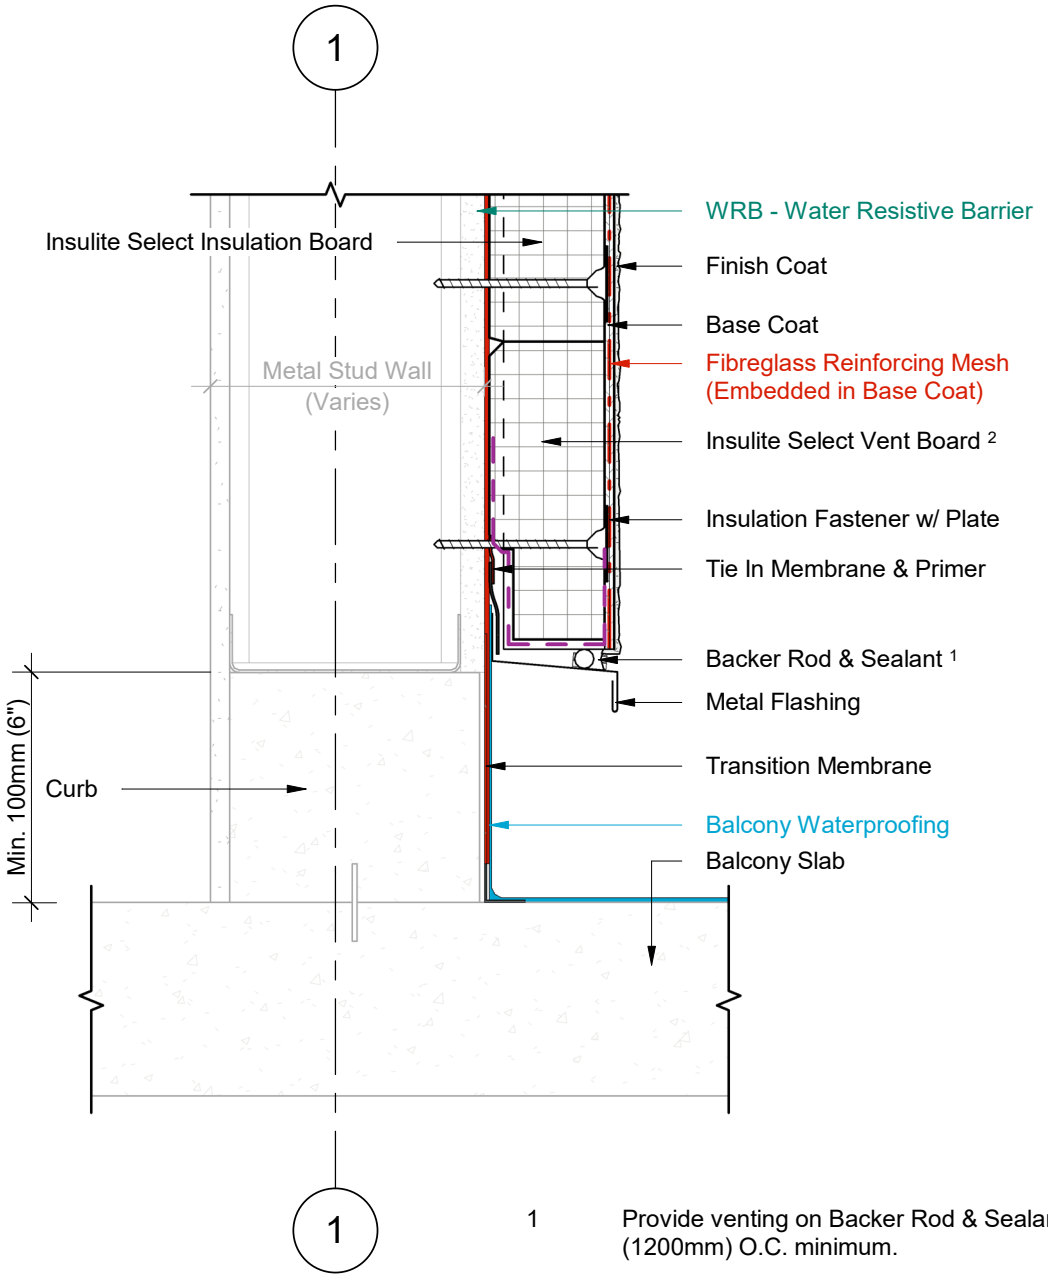

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION C)

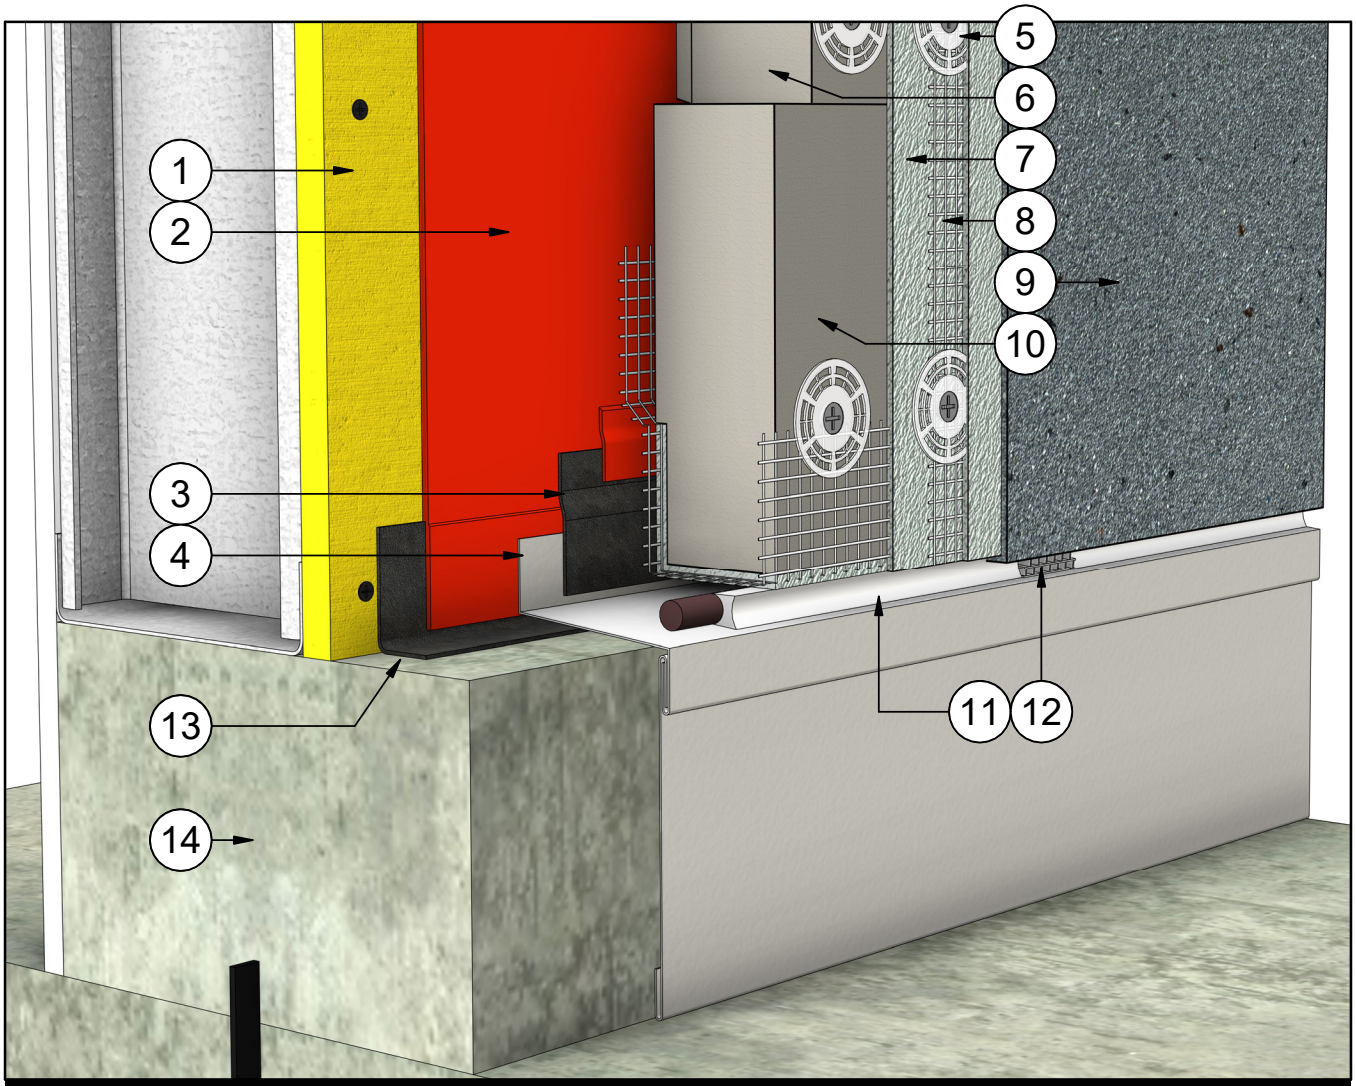

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
2	WRB - Water Resistive Barrier	9	Finish Coat
3	Tie In Membrane & Primer	10	Insulite Select Vent Board
4	Flashing & Counterflashing	11	Backer Rod & Sealant
5	Insulation Fastener w/ Plate	12	Sealant Vent
6	Insulite Select Insulation Board	13	Transition Membrane
7	Base Coat	14	Curb

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION C)

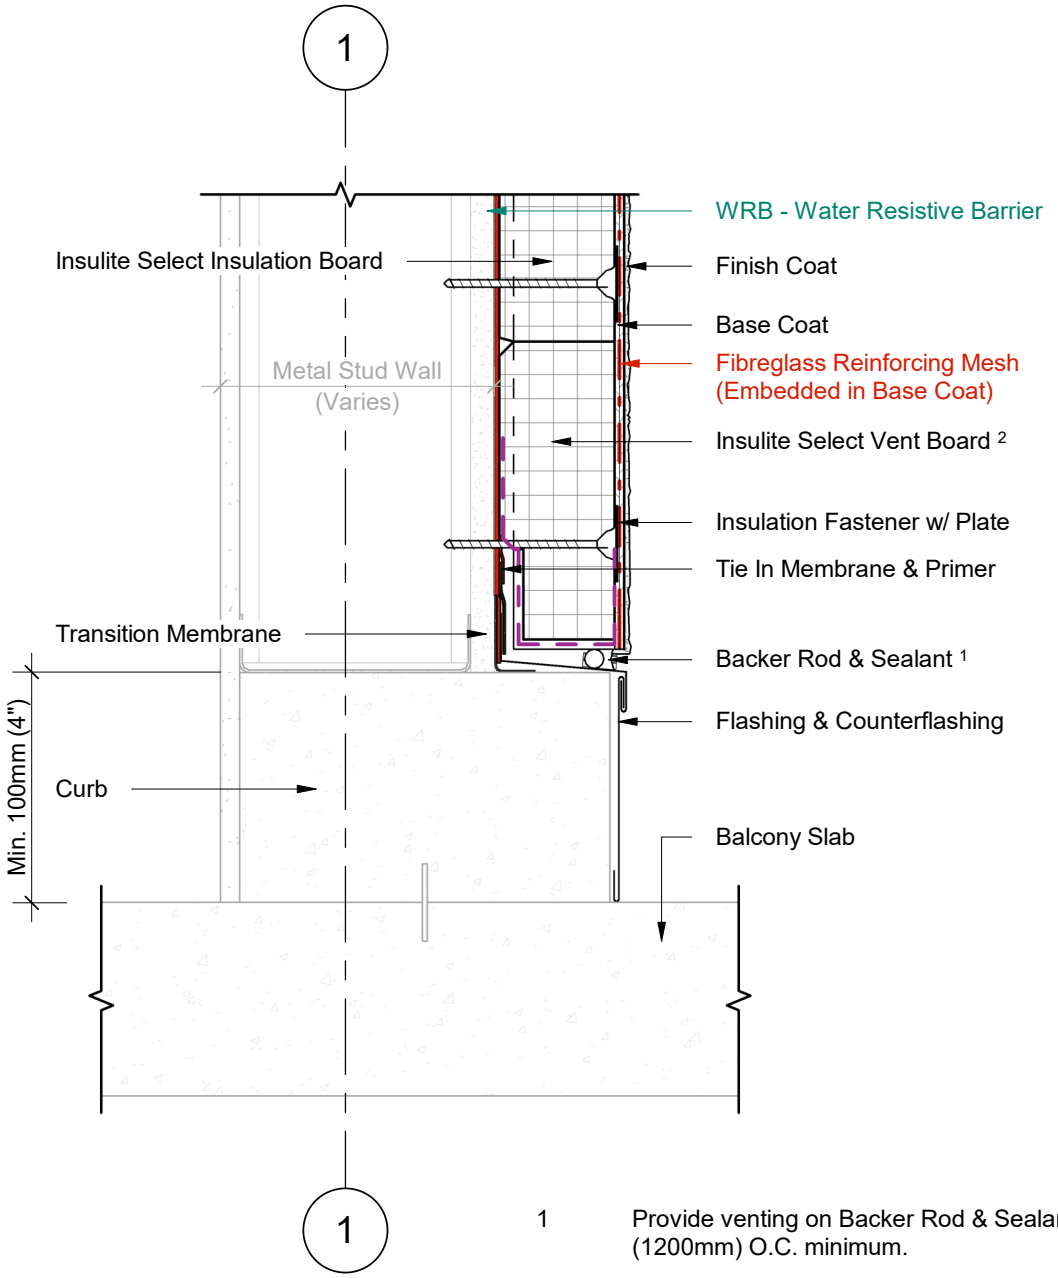

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION D)

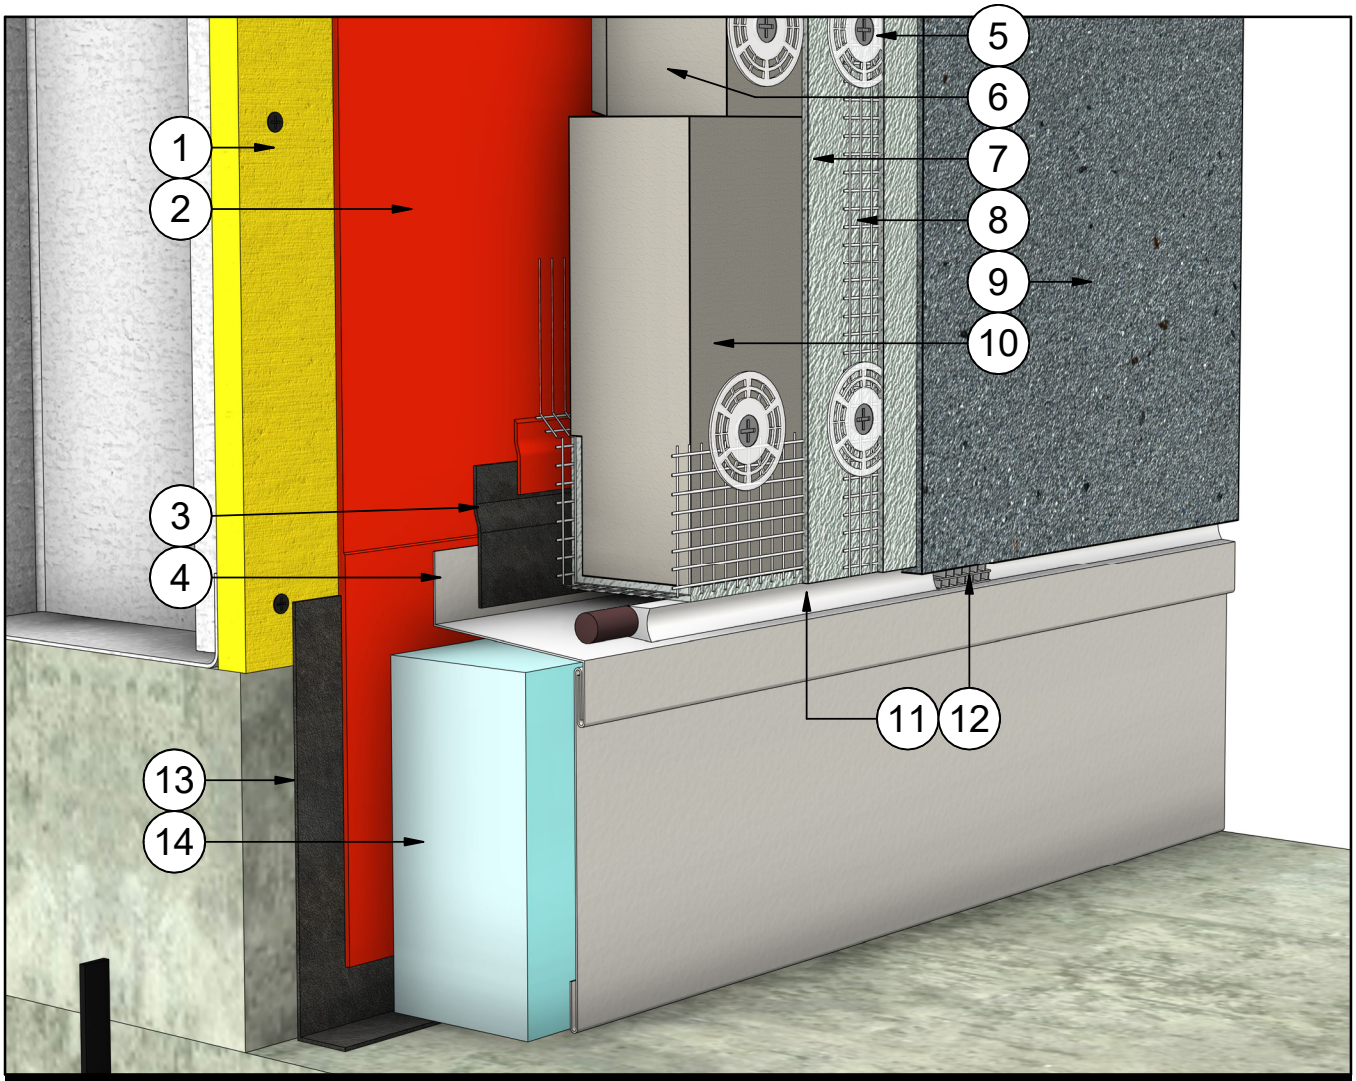

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
2	WRB - Water Resistive Barrier	9	Finish Coat
3	Tie In Membrane & Primer	10	Insulite Select Vent Board
4	Flashing	11	Backer Rod & Sealant
5	Insulation Fastener w/ Plate	12	Sealant Vent
6	Insulite Select Insulation Board	13	Transition Membrane
7	Base Coat	14	Rigid Insulation

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION AT BALCONY SLAB (OPTION D)

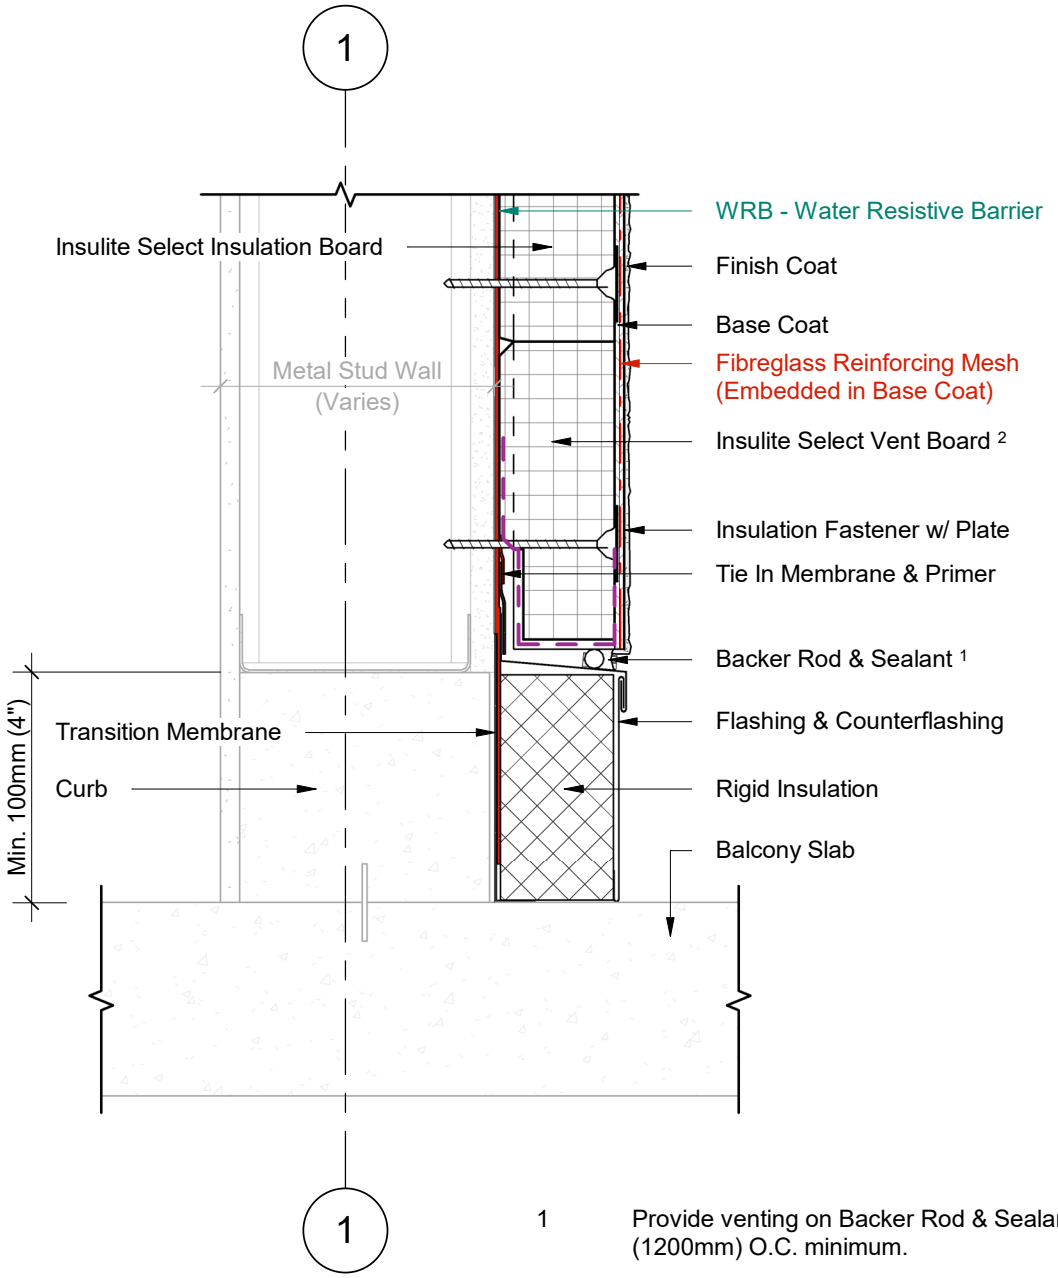

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION BELOW BALCONY SLAB

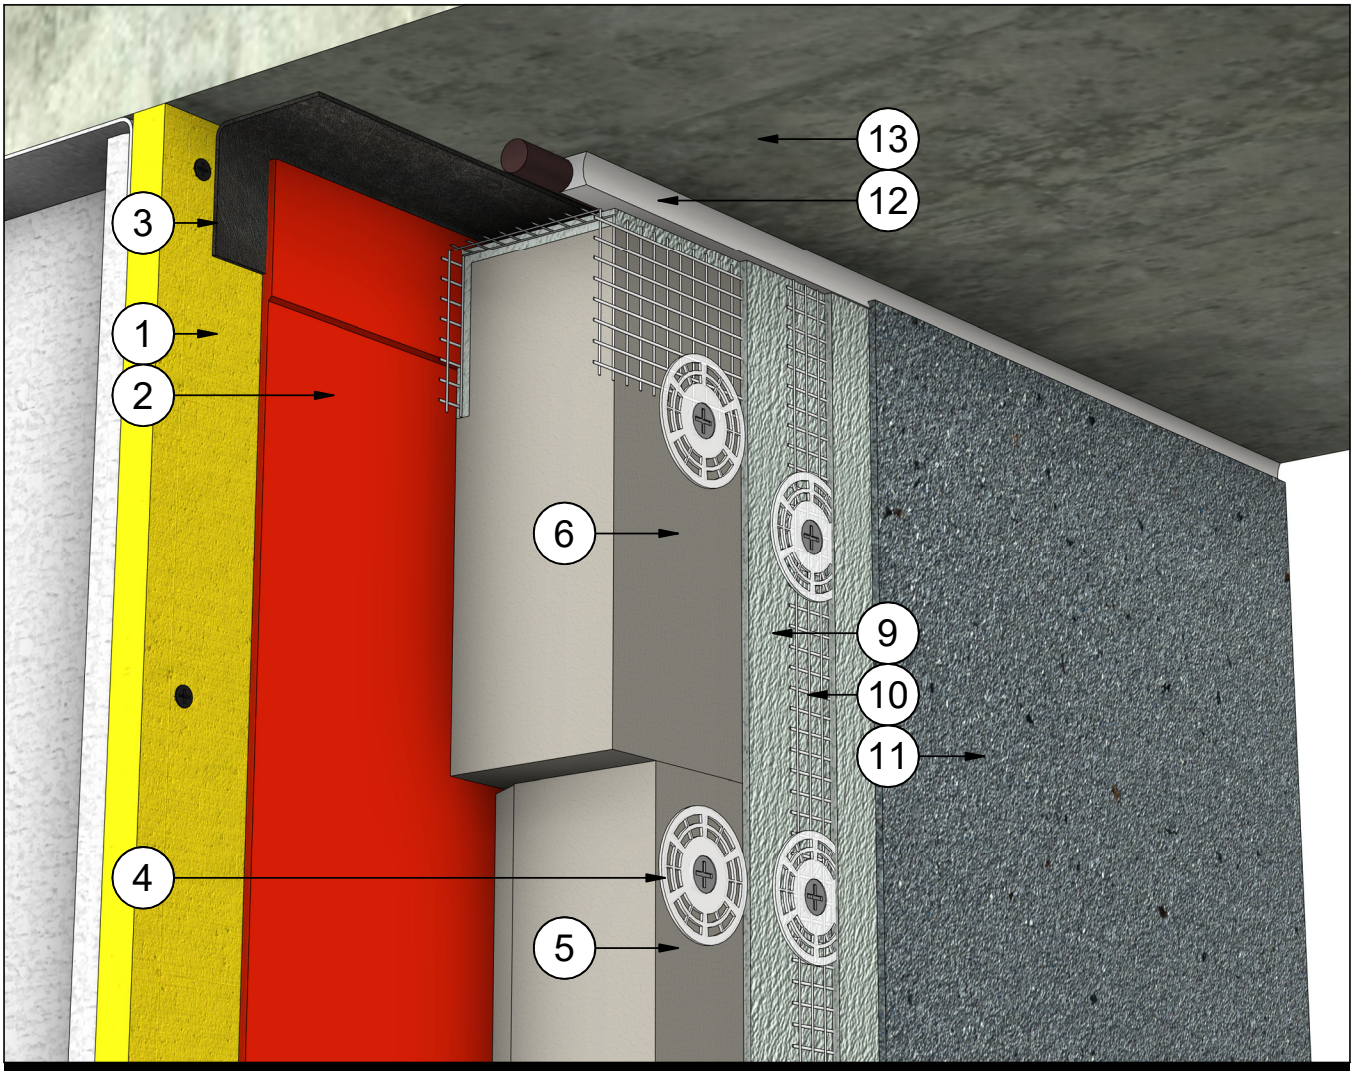

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	9	Base Coat
2	WRB - Water Resistive Barrier	10	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
3	Tie In Membrane	11	Finish Coat
4	Insulation Fastener w/ Plate	12	Backer Rod & Sealant
5	Insulite Select Insulation Board	13	Balcony Slab
6	Insulite Select Boundary Board		

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

TERMINATION BELOW BALCONY SLAB

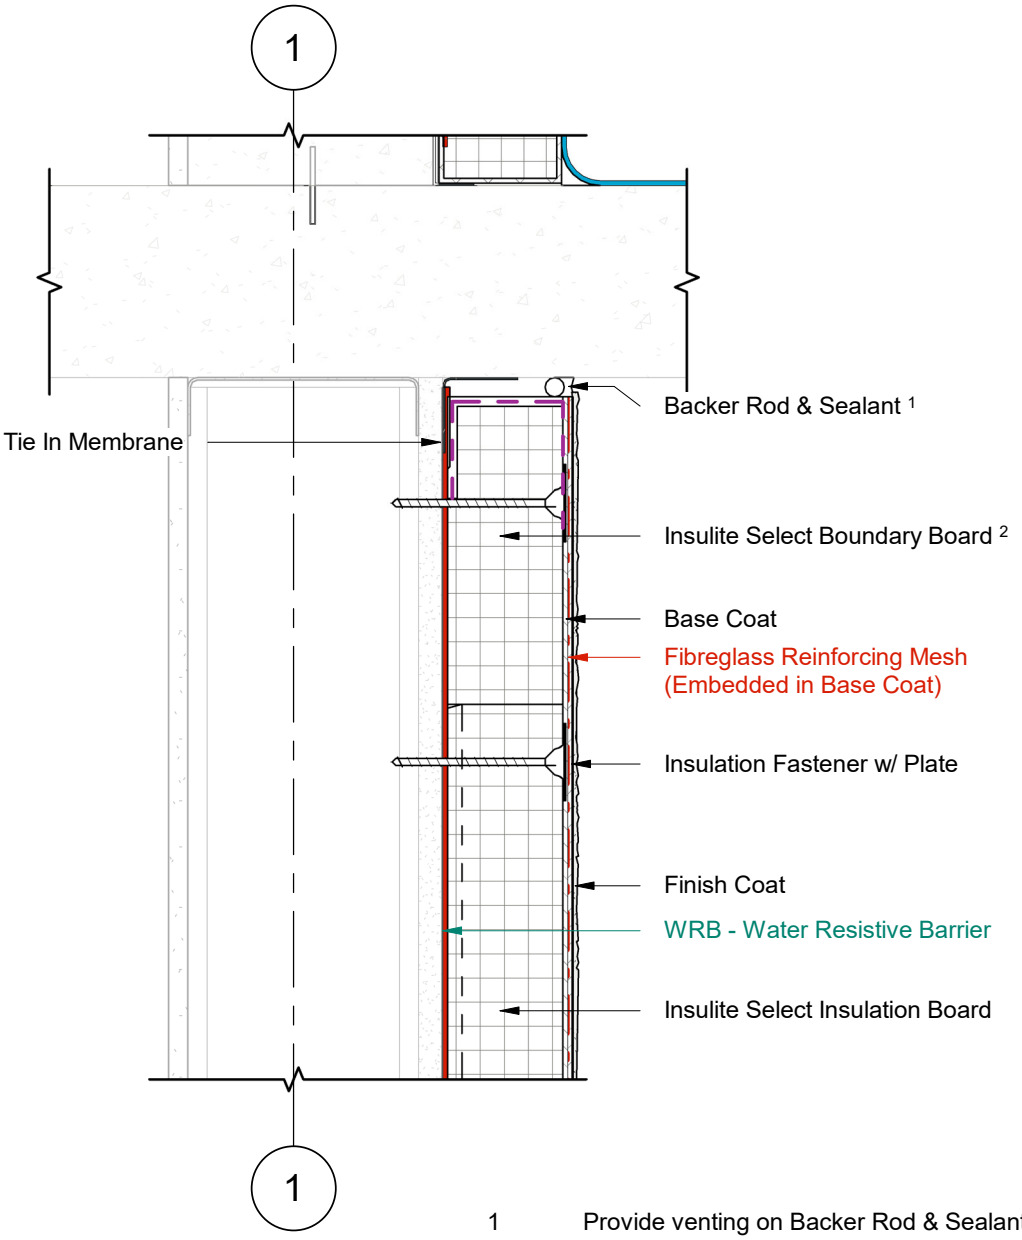

1/2 Wall Section
Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Boundary Board includes a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

FOUNDATION TERMINATION WITH FLASHING

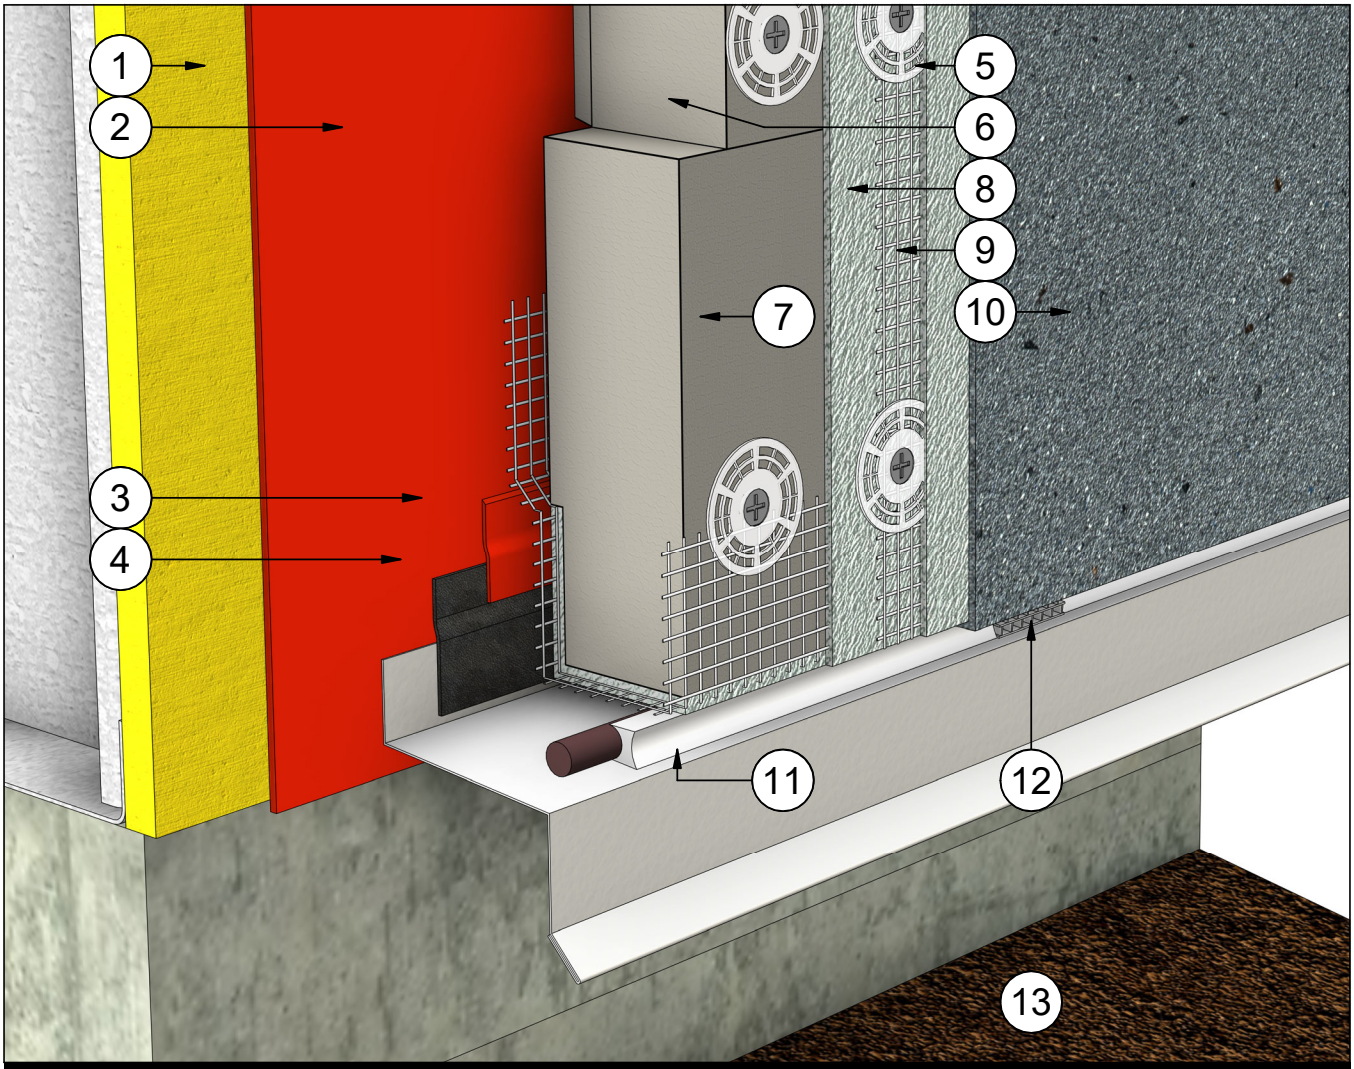

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	8	Base Coat
2	WRB - Water Resistive Barrier	9	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
3	Tie In Membrane & Primer	10	Finish Coat
4	Flashing	11	Backer Rod & Sealant
5	Insulation Adhesive	12	Sealant Vent
6	Insulite Select Insulation Board	13	Grade
7	Insulite Select Vent Board		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

FOUNDATION TERMINATION WITH FLASHING

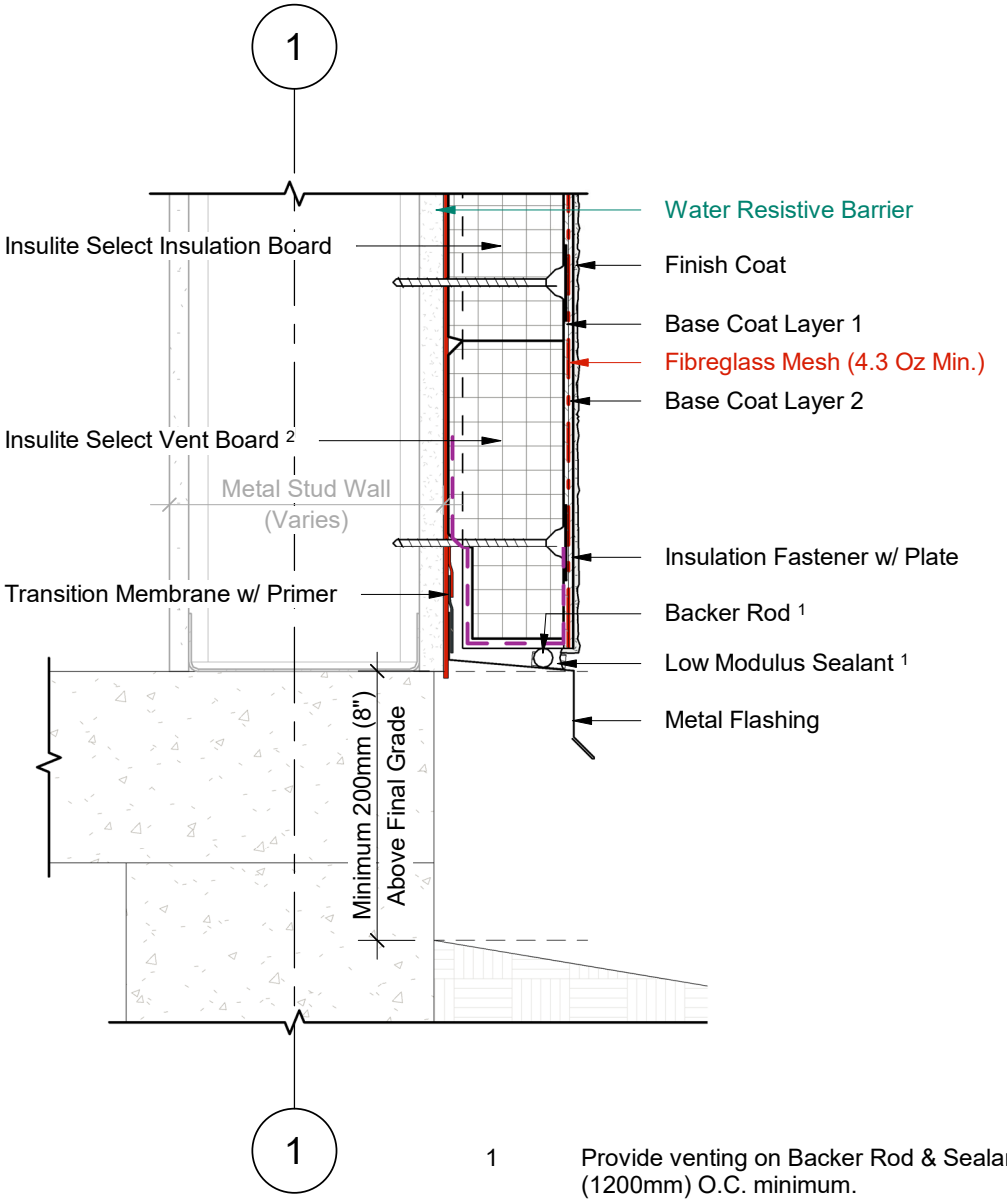

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULATED FOUNDATION WITH FLASHING

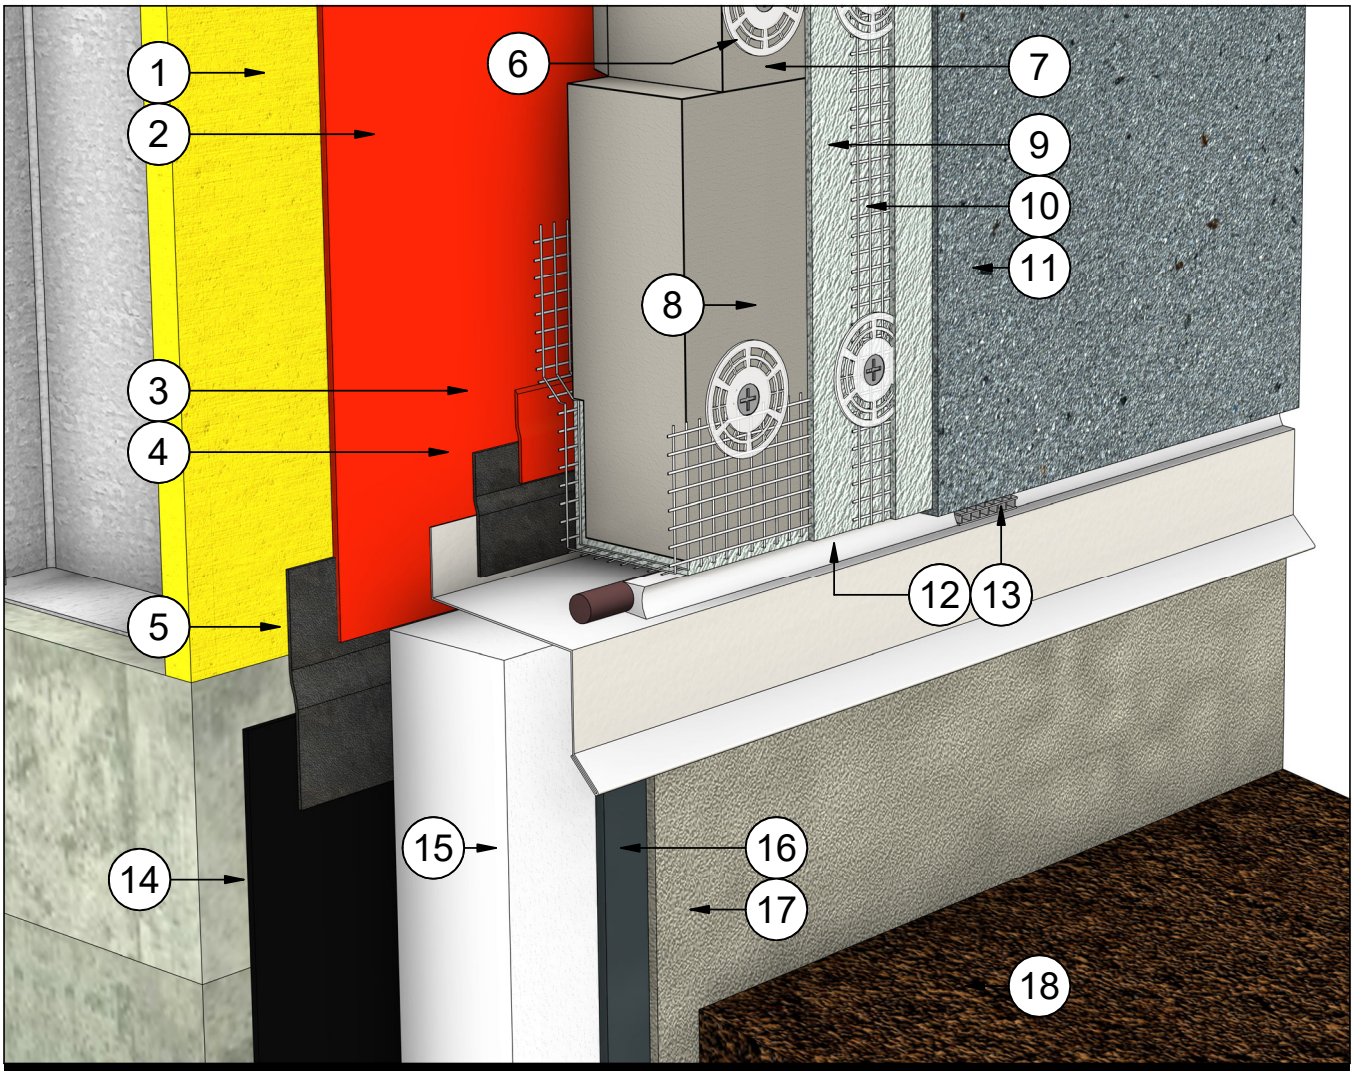

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	10	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
2	WRB - Water Resistive Barrier	11	Finish Coat
3	Tie In Membrane & Primer	12	Backer Rod & Sealant
4	Flashing	13	Sealant Vent
5	Tie In Membrane	14	Air/Vapour Barrier
6	Insulation Fastener w/ Plate	15	Below Grade EPS Insulation
7	Insulite Select Insulation Board	16	Elastomeric Waterproofing
8	Insulite Select Vent Board	17	Latex Modified Cement
9	Base Coat	18	Grade

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULATED FOUNDATION WITH FLASHING

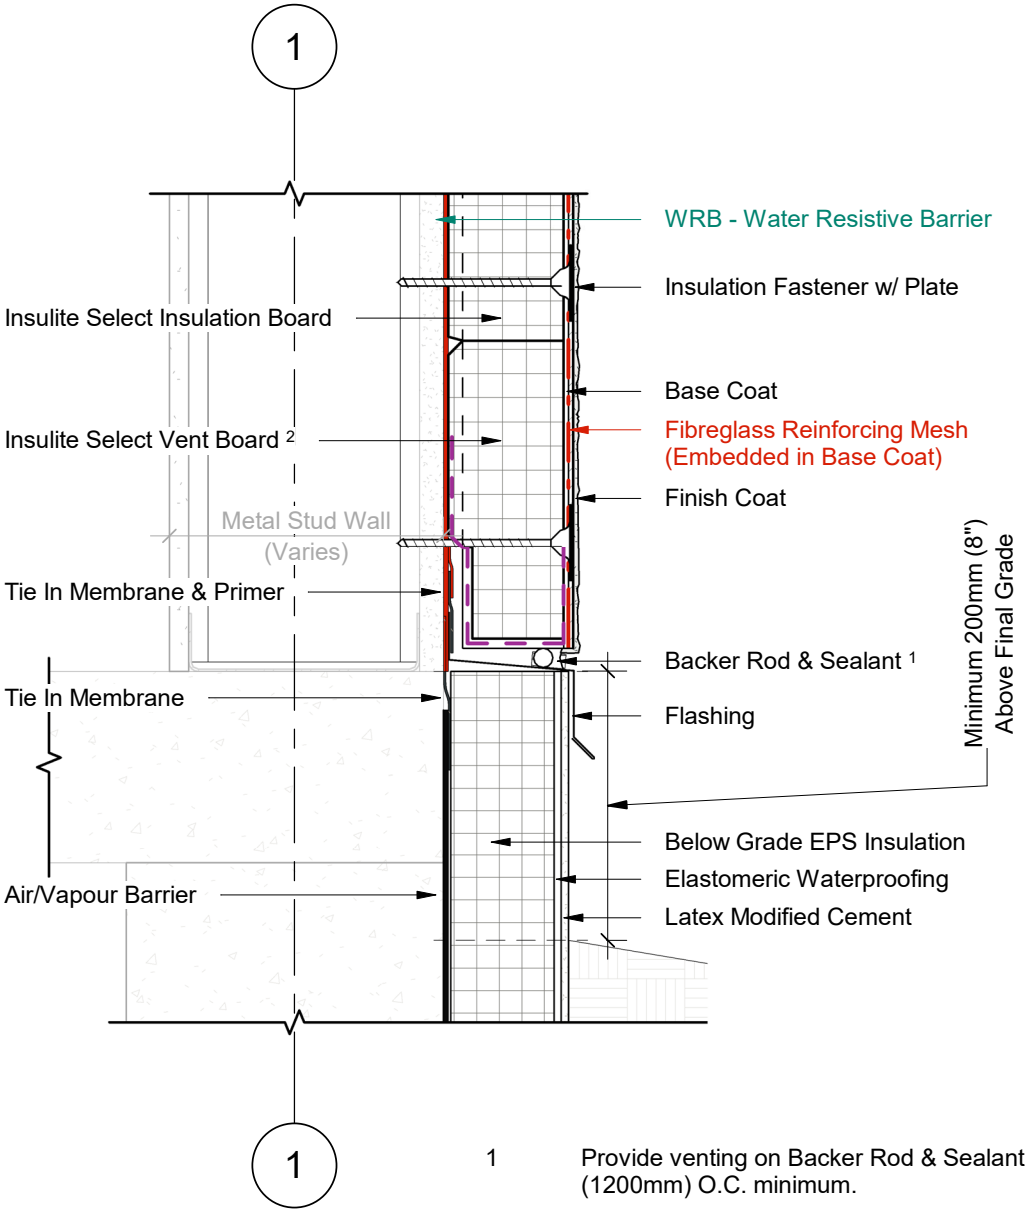

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

1/2 Wall Section
Scale = 1 : 5

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET210_R2

VERTICAL CLADDING CHANGE

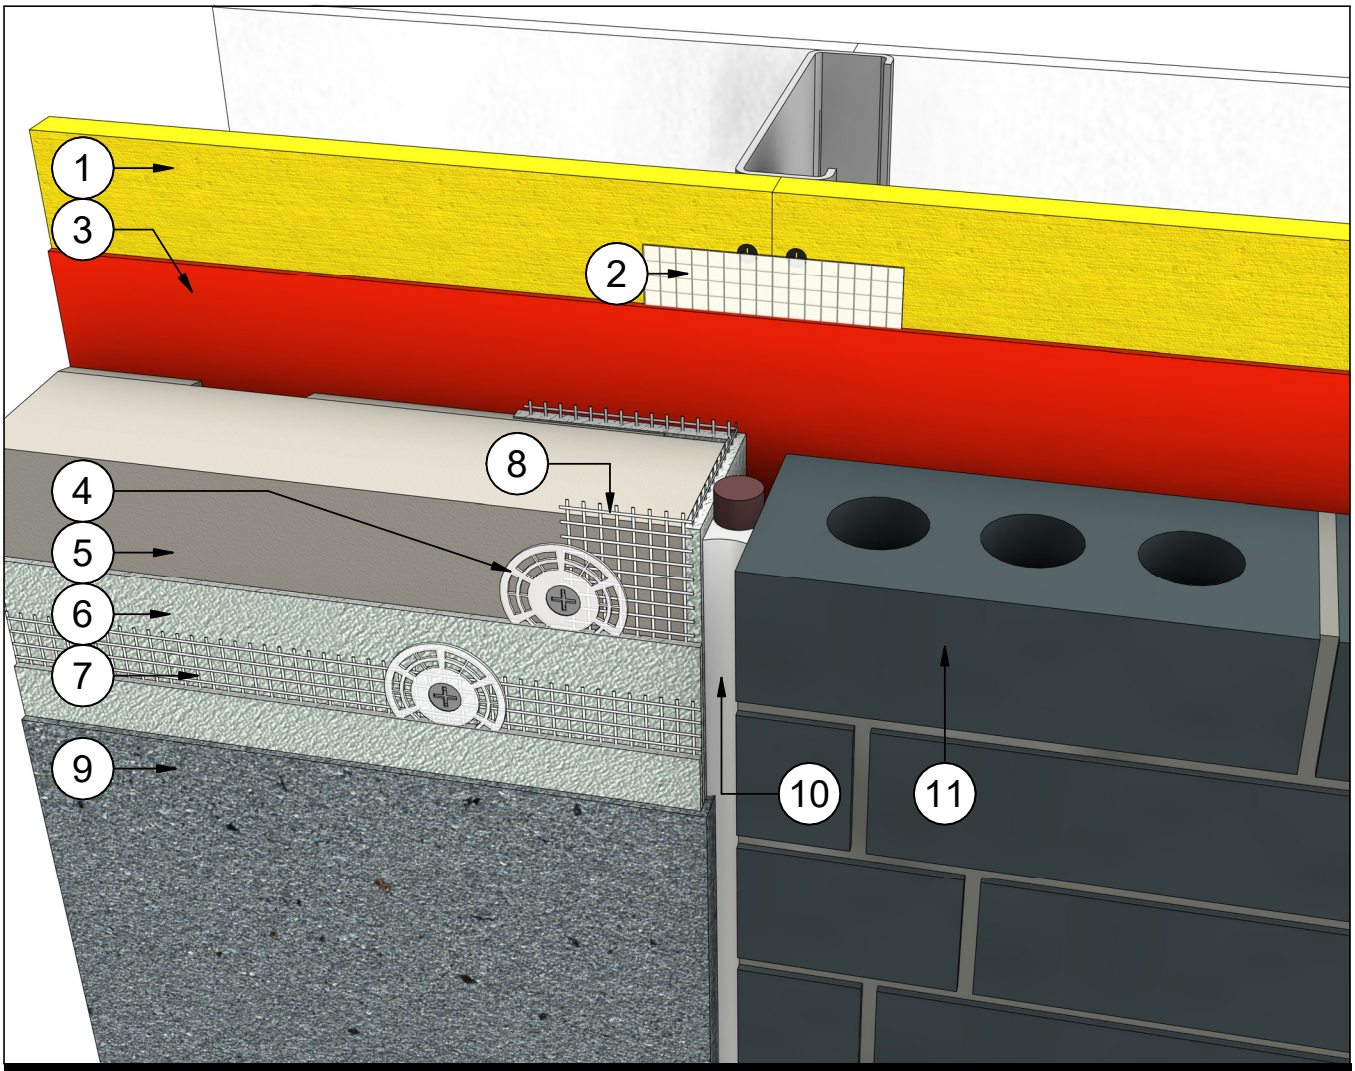

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Base Coat
7	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Backer Rod & Sealant
11	Alternate Cladding

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET210_R2

VERTICAL CLADDING CHANGE

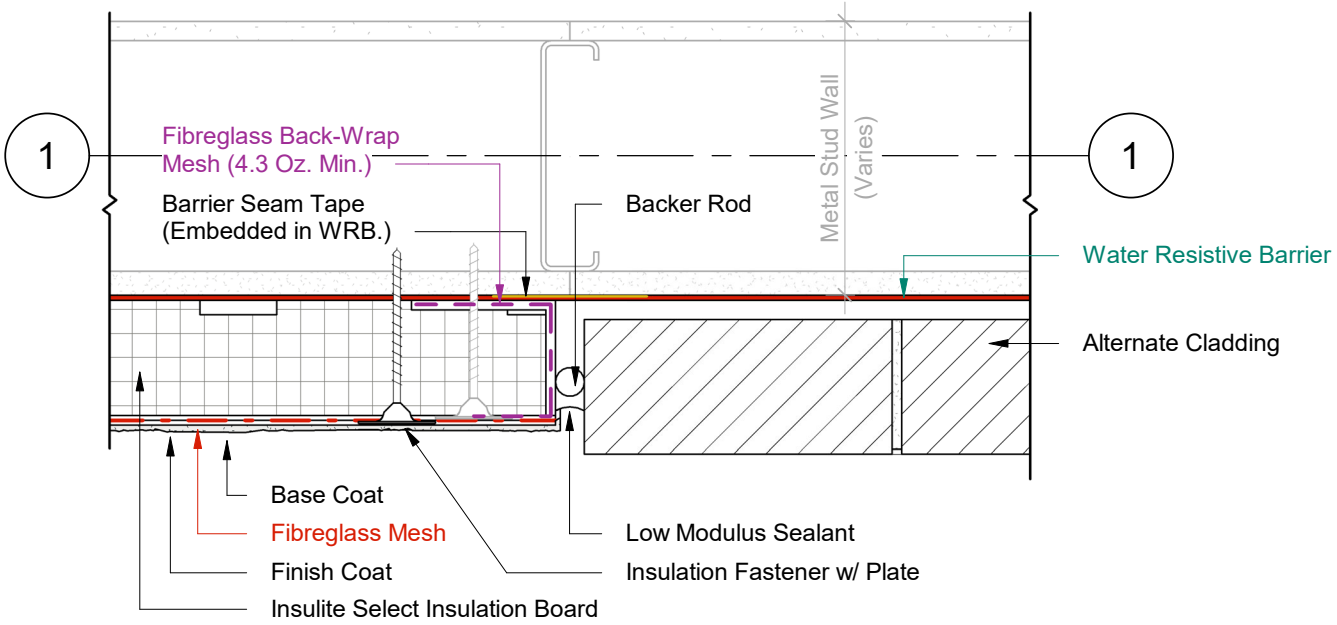

1/2 Plan Detail
Scale = 1:5

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET301_R2

WINDOW HEAD (OPTION A)

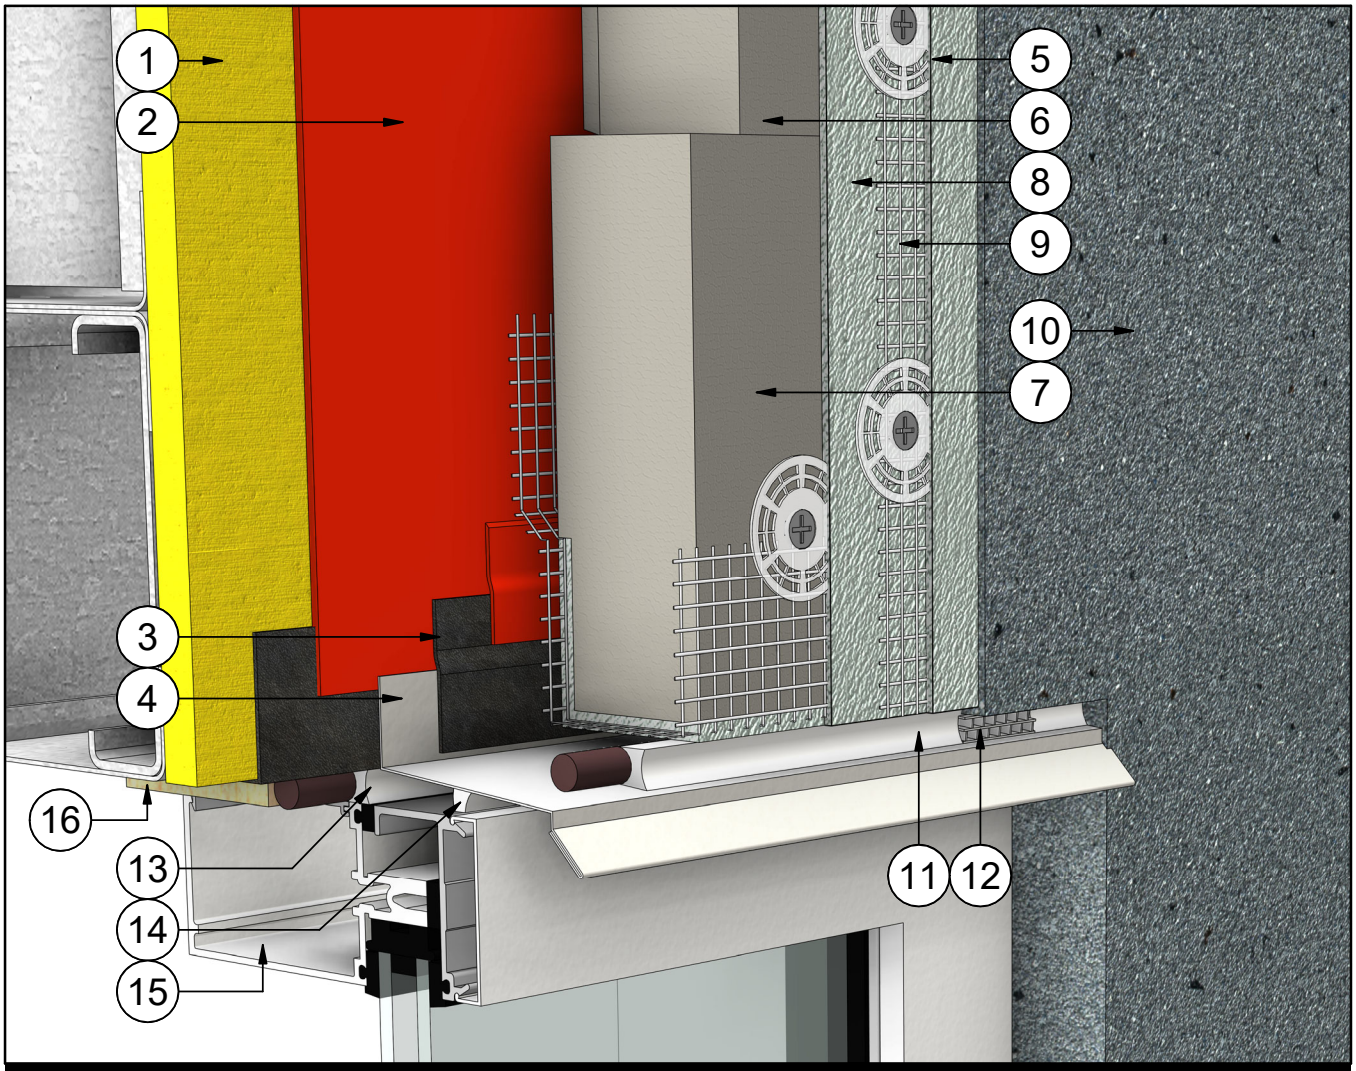

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	7	Insulite Select Vent Board
2	WRB - Water Resistive Barrier	10	Finish Coat
3	Tie In Membrane & Primer	11	Backer Rod & Sealant
4	Flashing w/ End Dams	12	Sealant Vent
5	Insulation Fastener w/ Plate	13	Backer Rod & Sealant
6	Insulite Select Insulation Board	14	Sealant
8	Base Coat	15	Window Assembly
9	Fibreglass Reinforcing Mesh (Embedded in Base Coat)	16	Wood Blocking

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET301_R2

WINDOW HEAD (OPTION A)

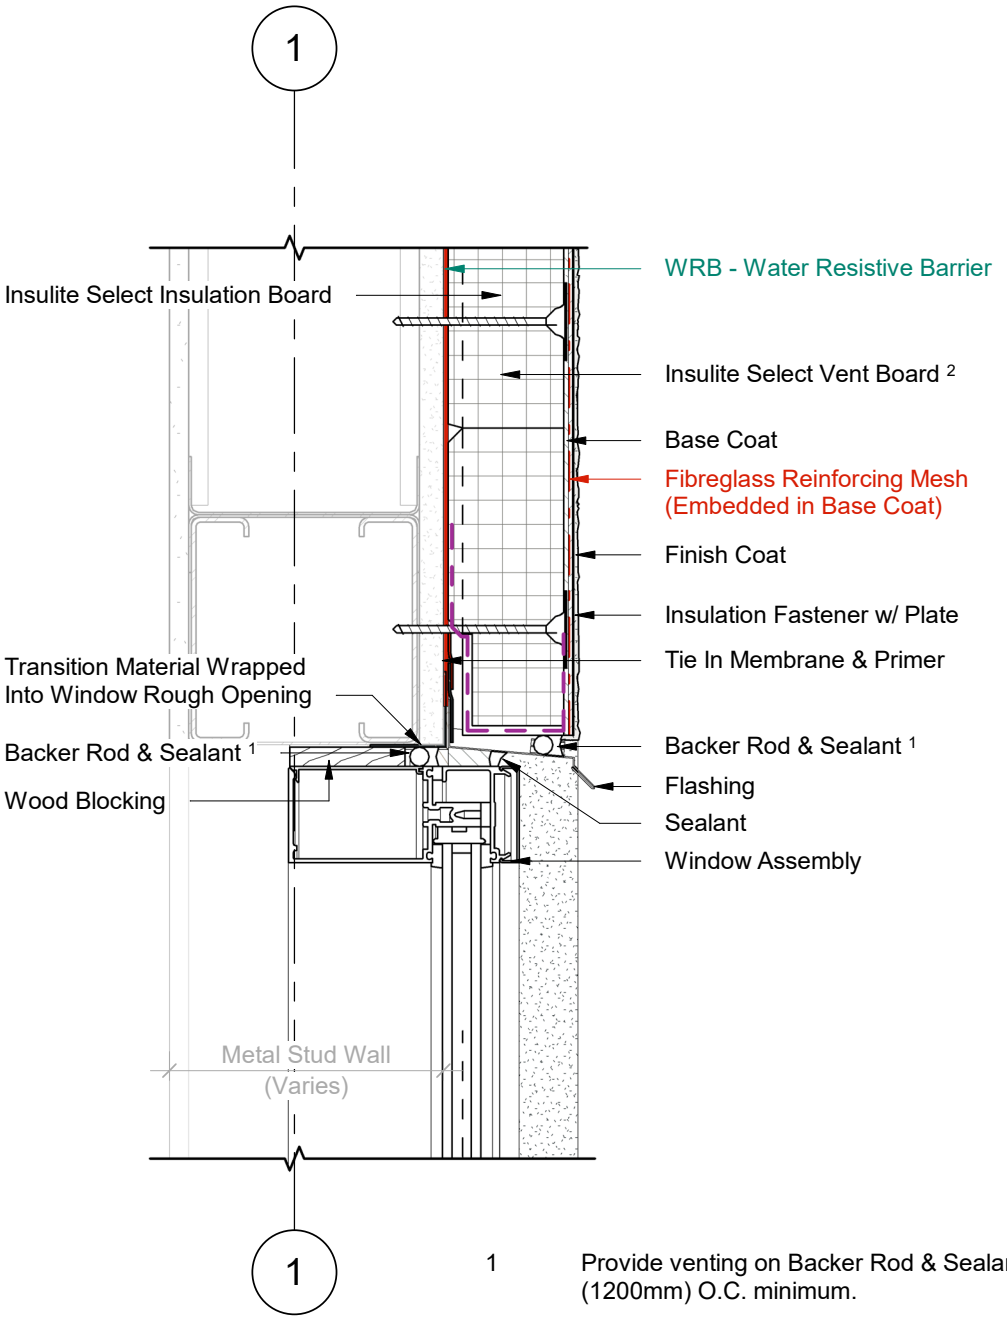

1/2 Wall Section
Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET301_R2

WINDOW HEAD (OPTION A)

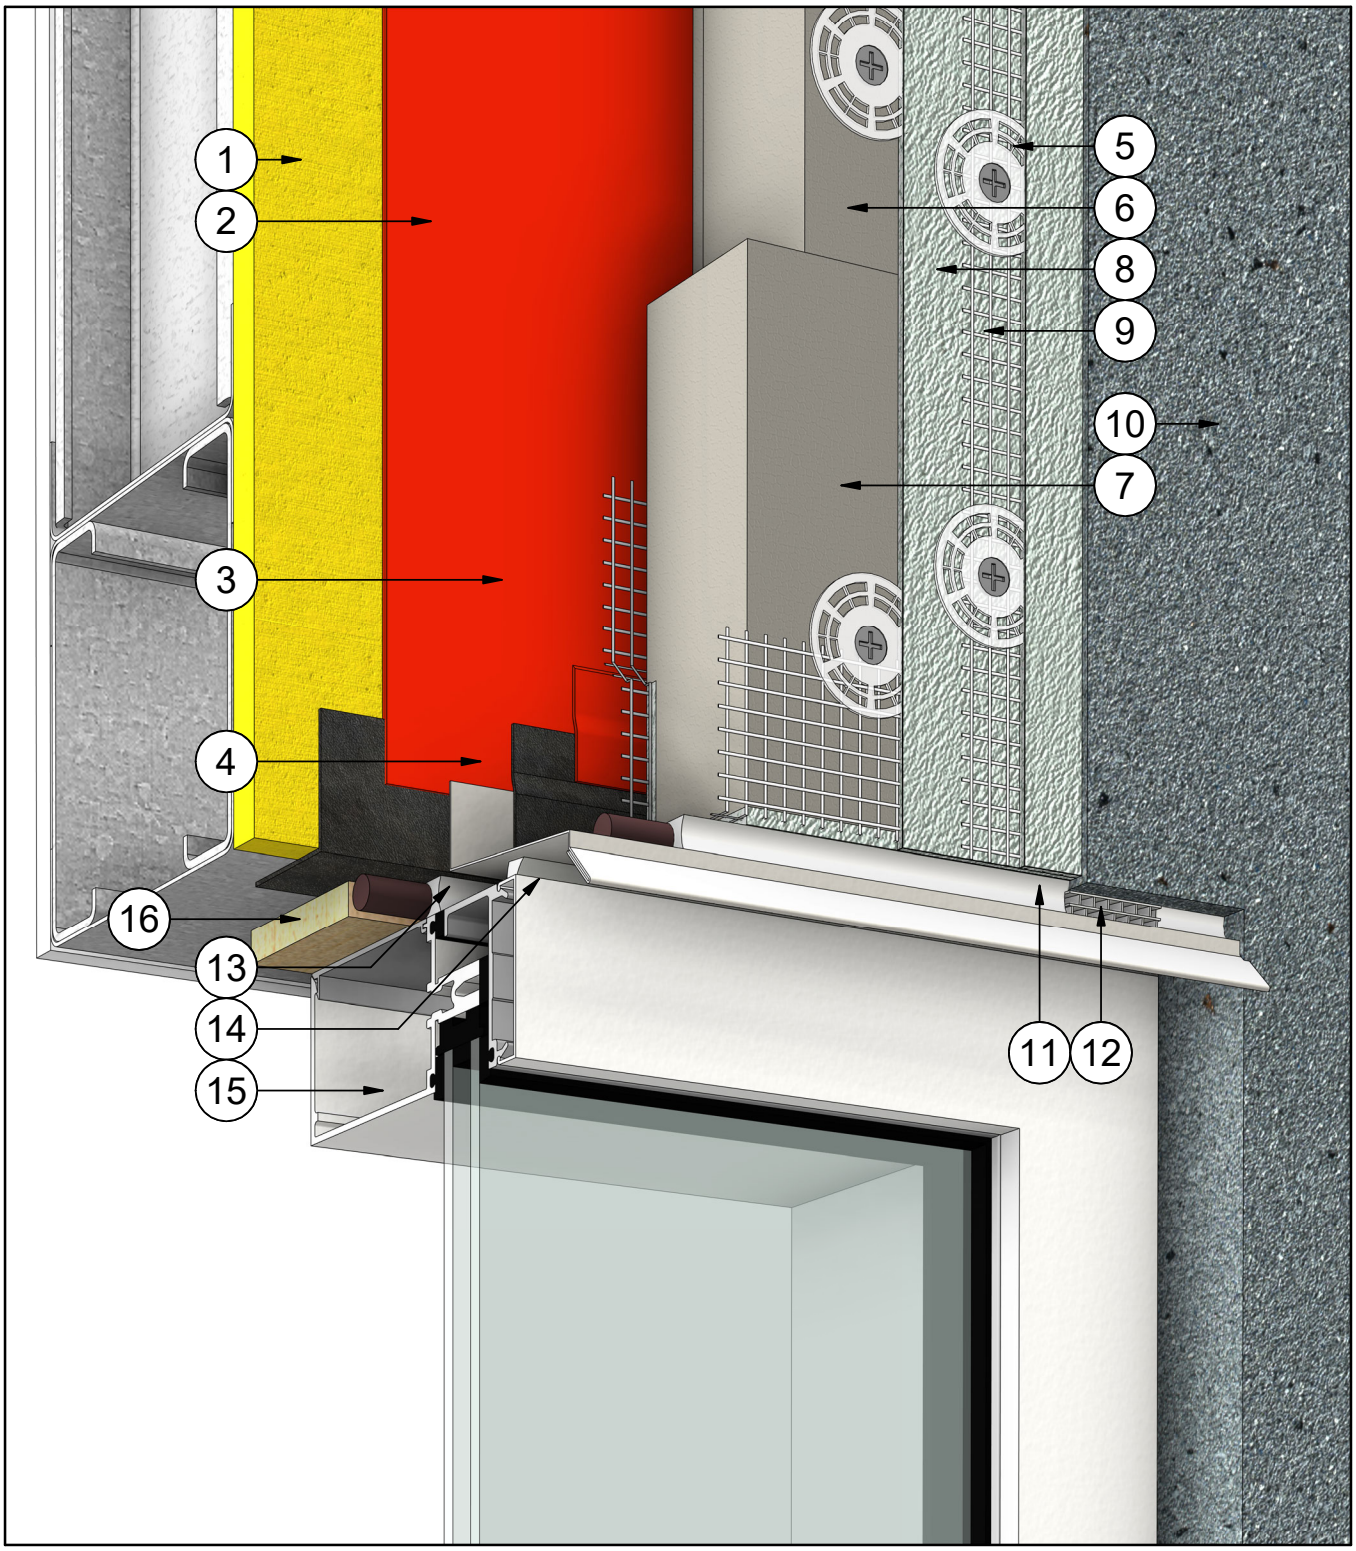

DURABOND

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET302_R2

WINDOW SILL (OPTION A)

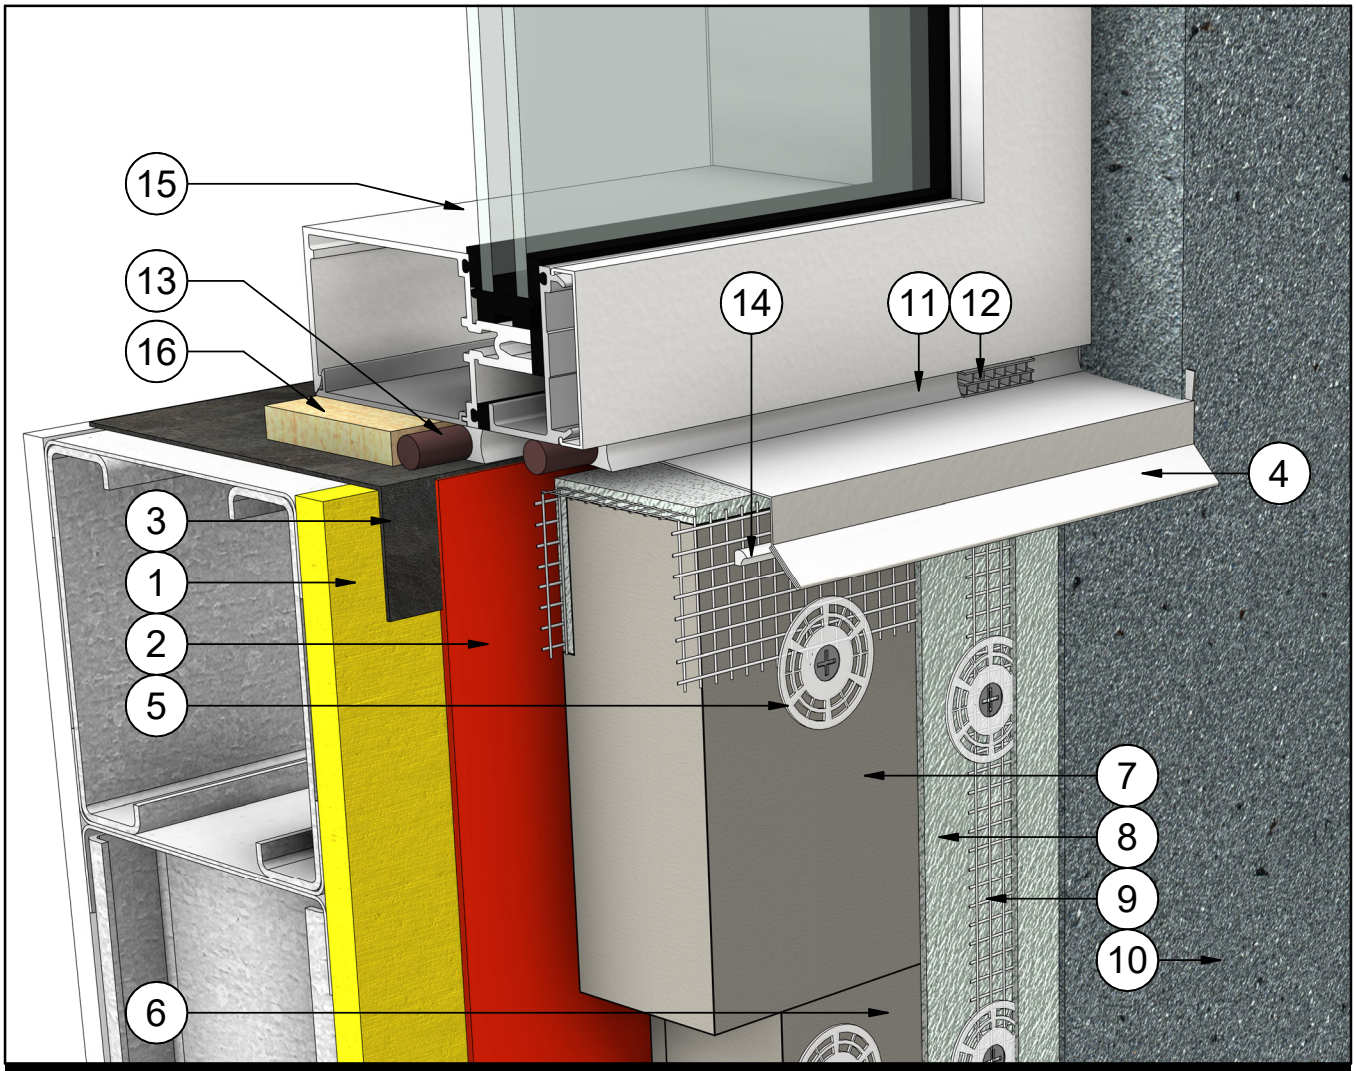

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	10	Finish Coat
2	WRB - Water Resistive Barrier	11	Backer Rod & Sealant
3	Transition Membrane	12	Sealant Vent
4	Flashing w/ End Dams	13	Backer Rod & Sealant
5	Insulation Fastener w/ Plate	14	Sealant
6	Insulite Select Insulation Board	15	Window Assembly
7	Insulite Select Vent Board	16	Wood Blocking
8	Base Coat		
9	Fibreglass Reinforcing Mesh (Embedded in Base Coat)		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET302_R2

WINDOW SILL (OPTION A)

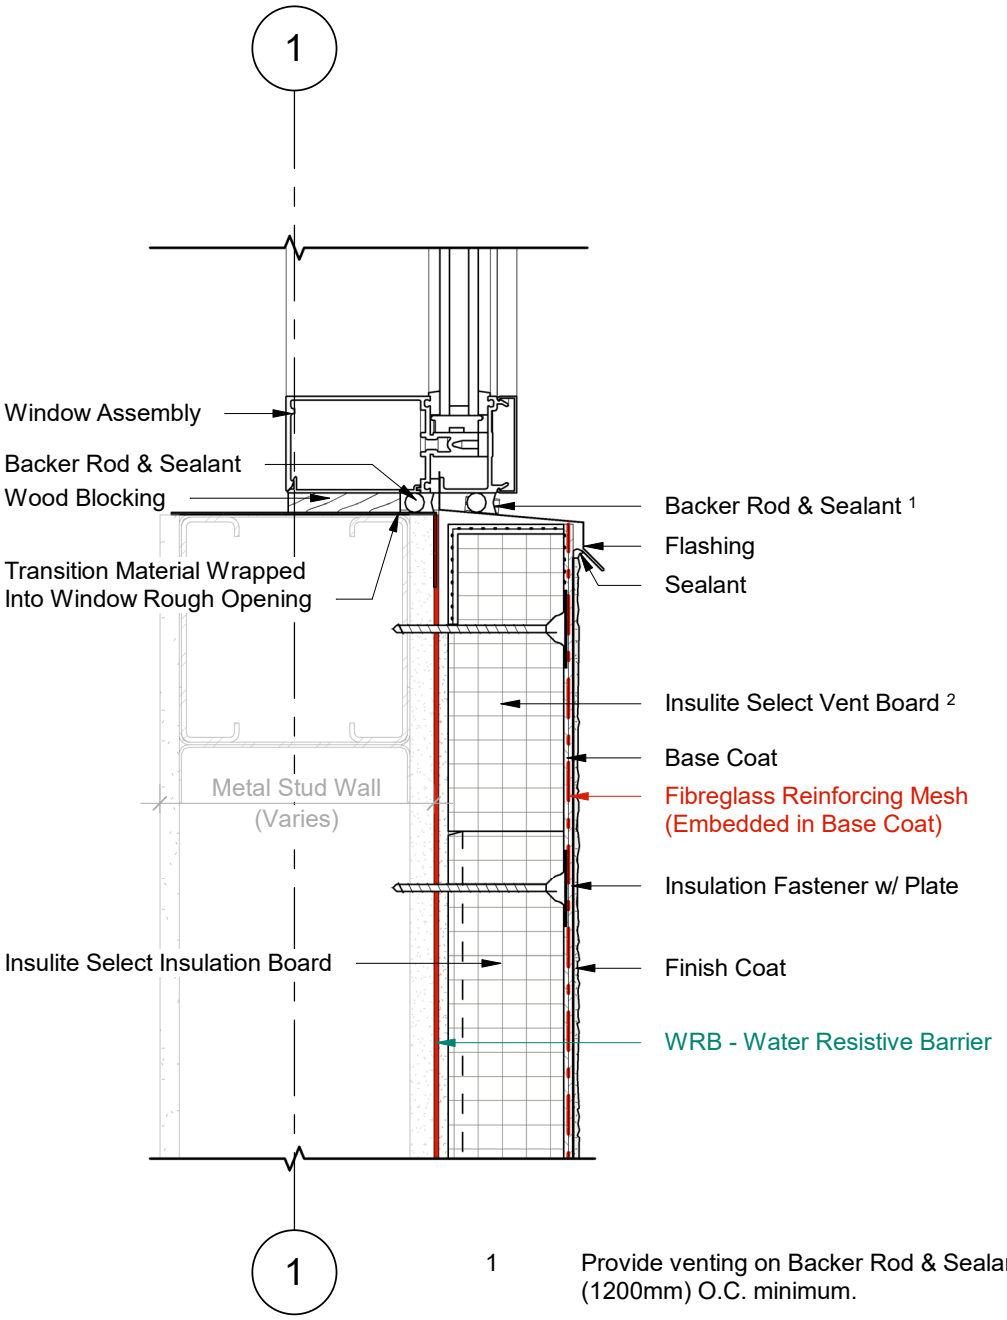

1/2 Wall Section
Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET302_R2

WINDOW SILL (OPTION A)

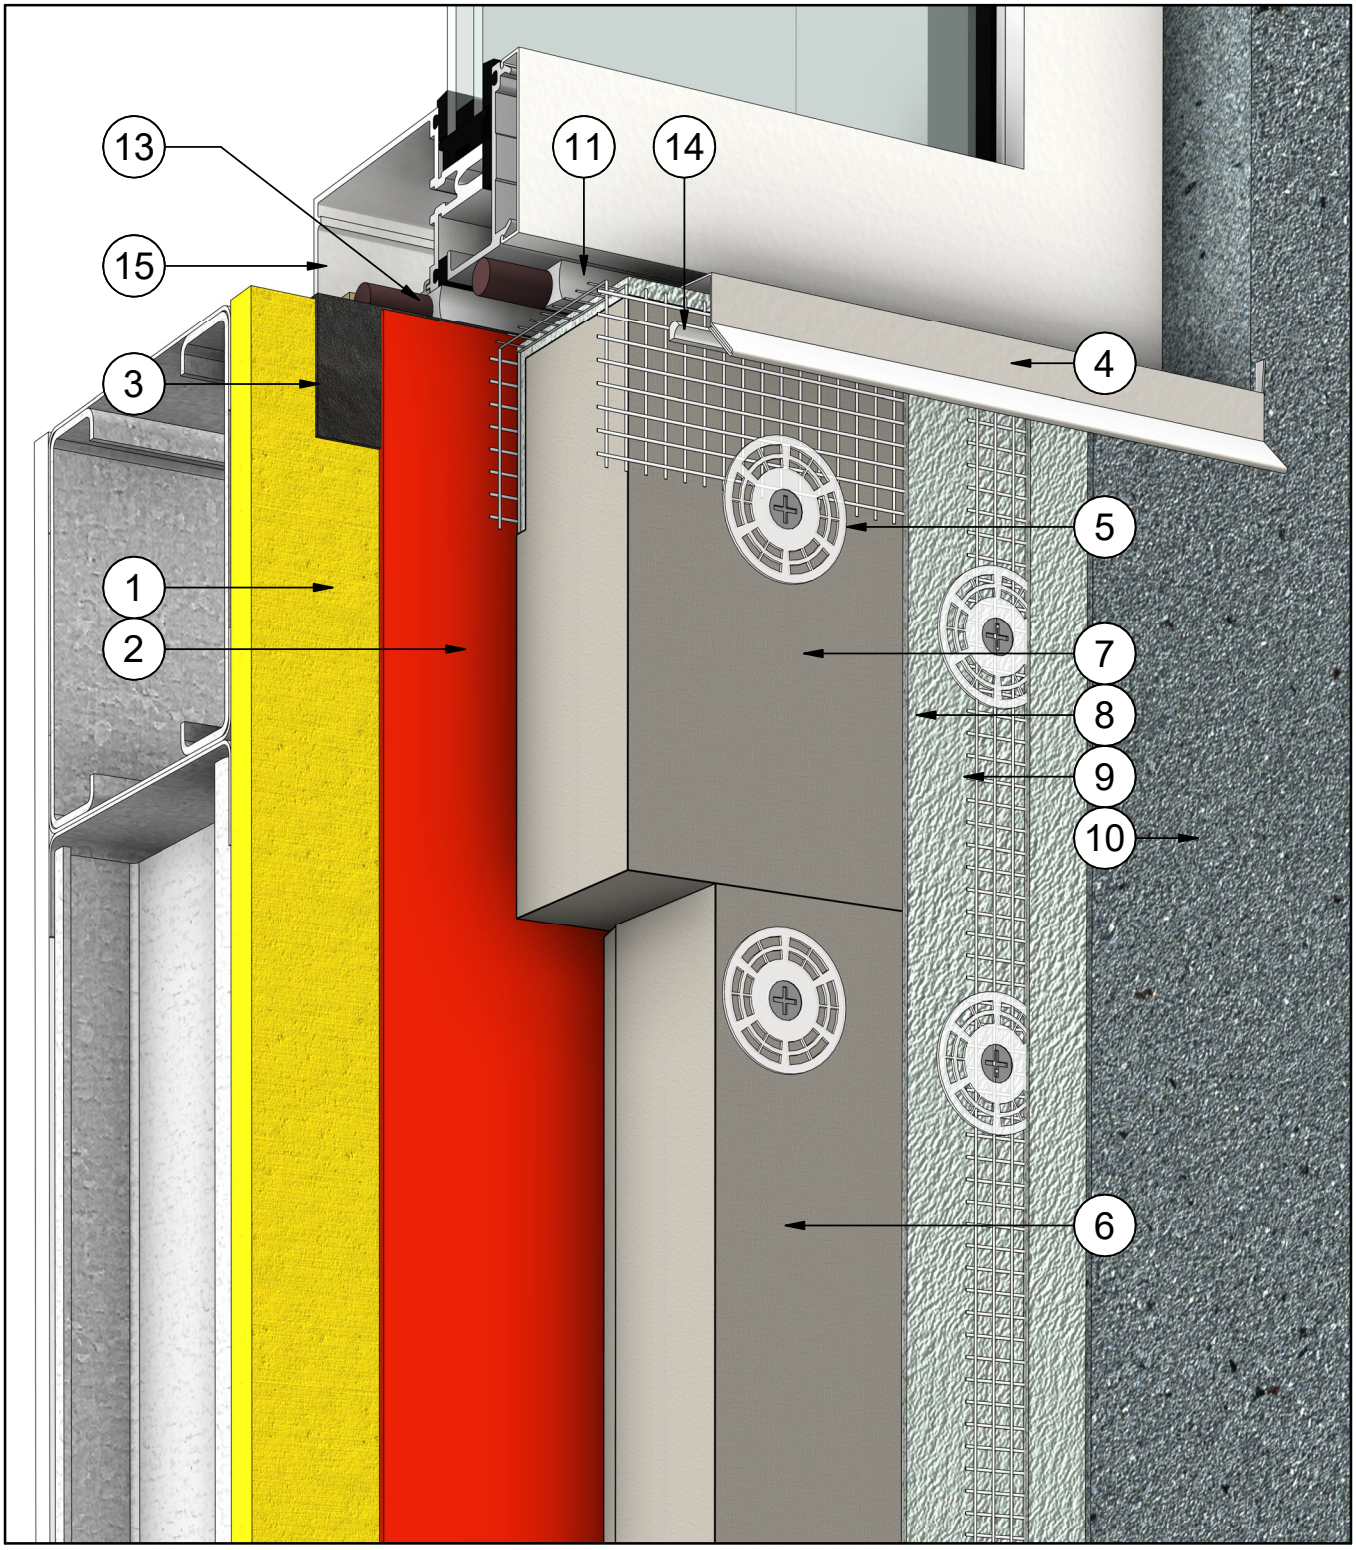

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET303_R2

WINDOW JAMB (OPTION A)

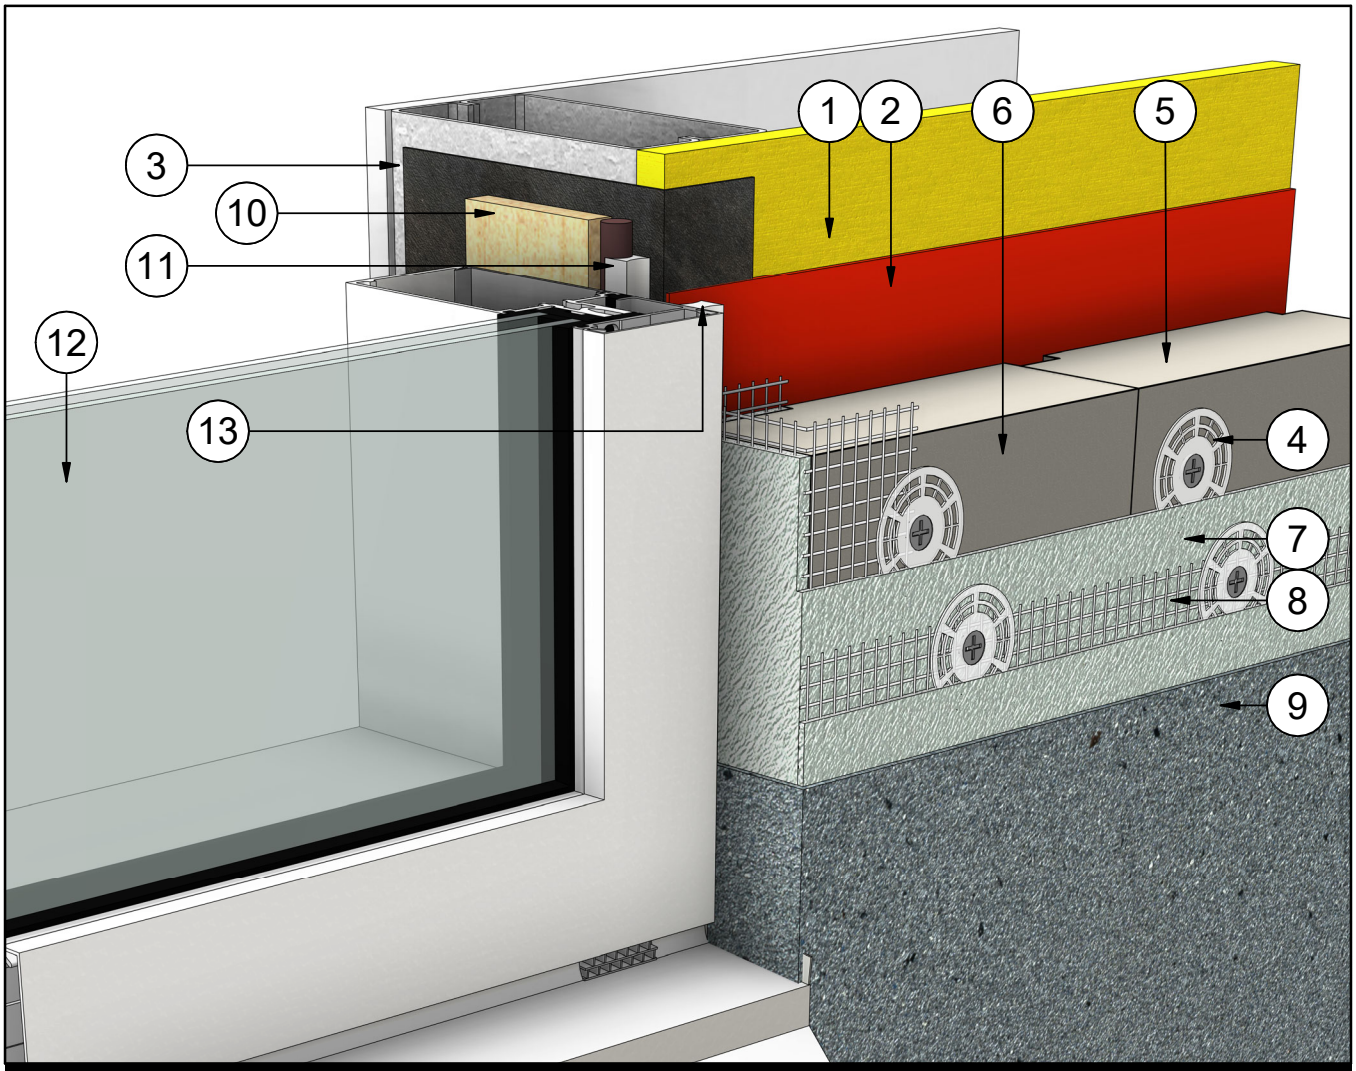

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	9	Finish Coat
2	WRB - Water Resistive Barrier	10	Wood Blocking
3	Transition Membrane	11	Backer Rod & Sealant
4	Insulation Fastener w/ Plate	12	Window Assembly
5	Insulite Select Insulation Board	13	Sealant
6	Insulite Select Boundary Board		
7	Base Coat		
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET303_R2

WINDOW JAMB (OPTION A)

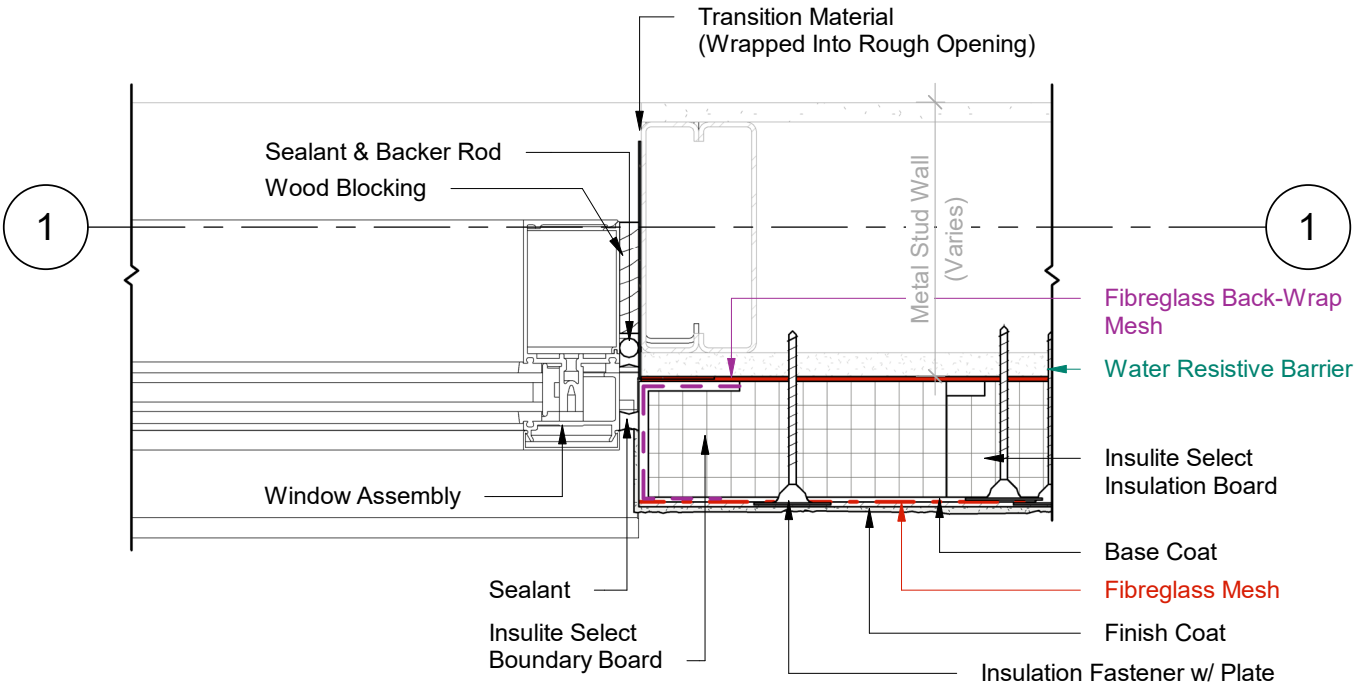

1/2 Plan Detail
Scale = 1:5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

WINDOW JAMB (OPTION A)

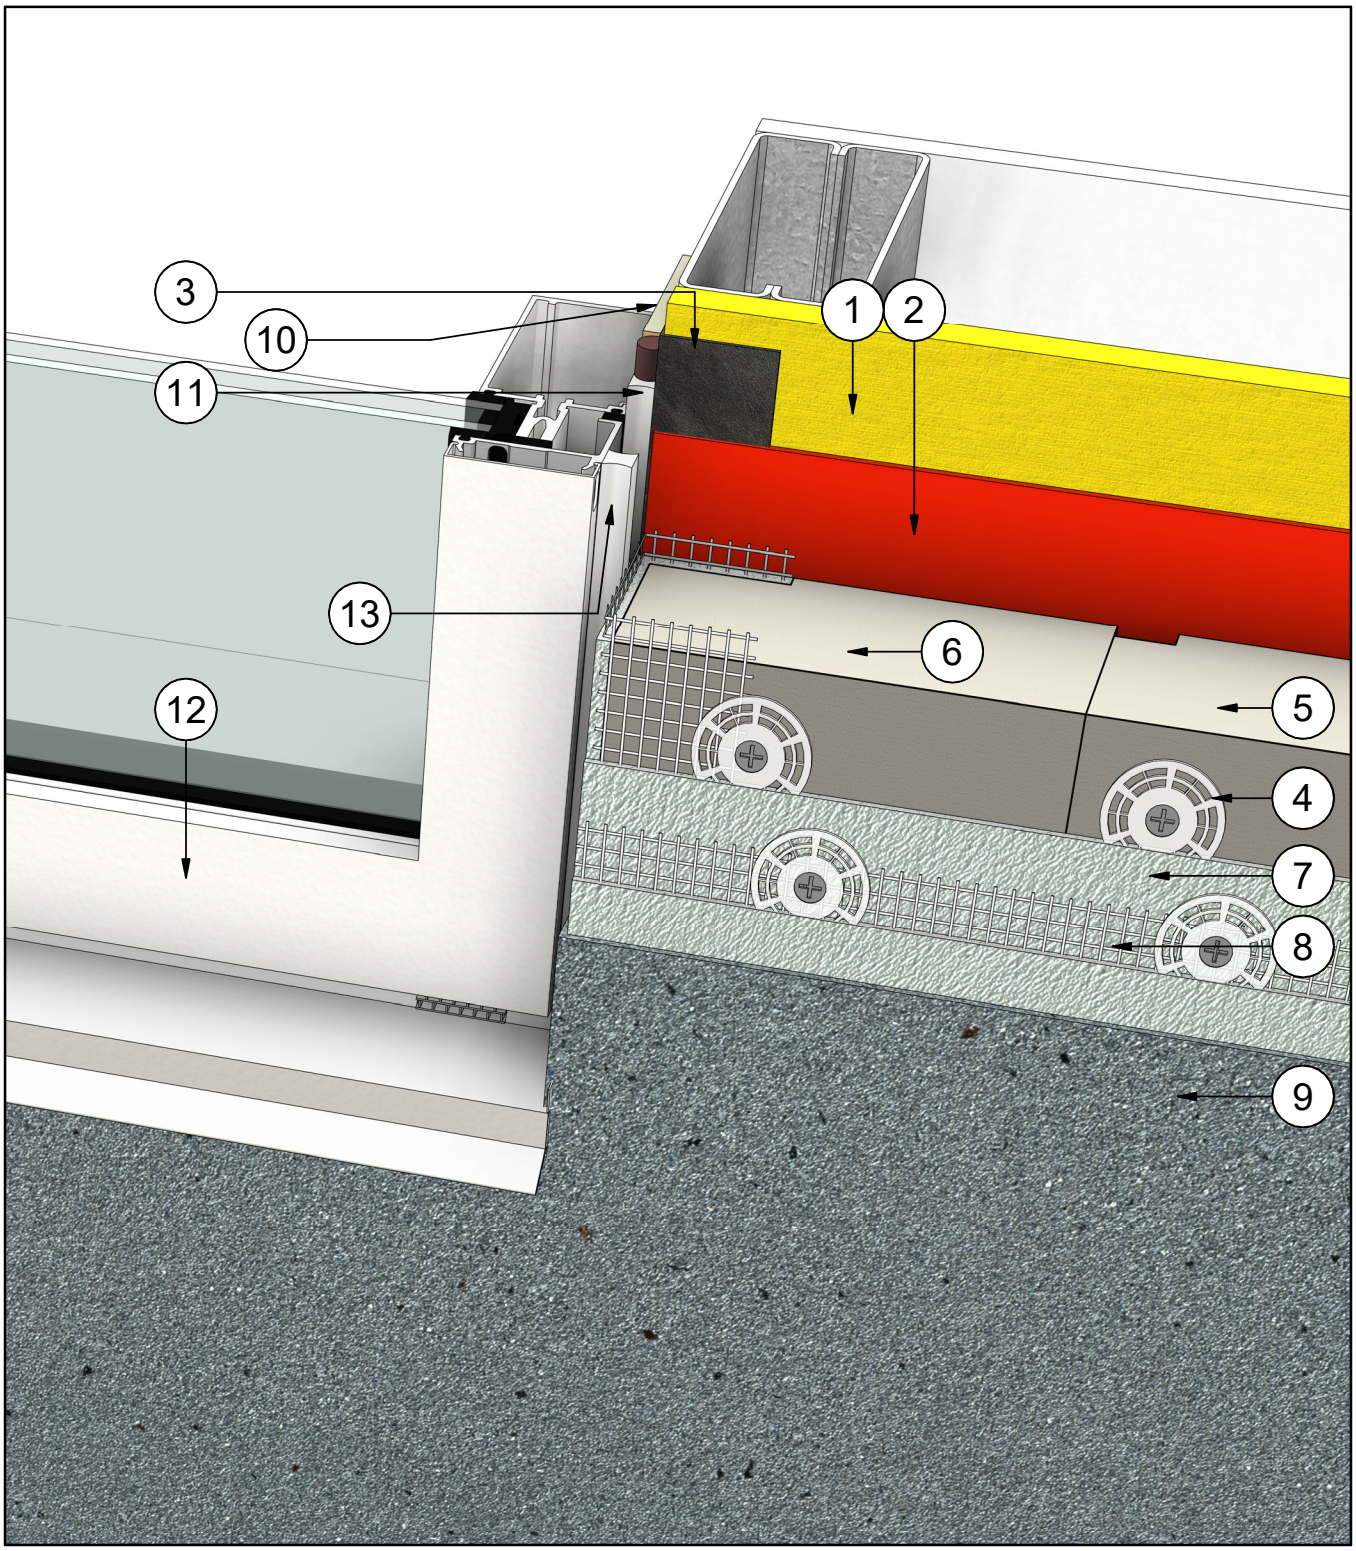

DURABOND

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET304_R2

WINDOW HEAD (OPTION B)

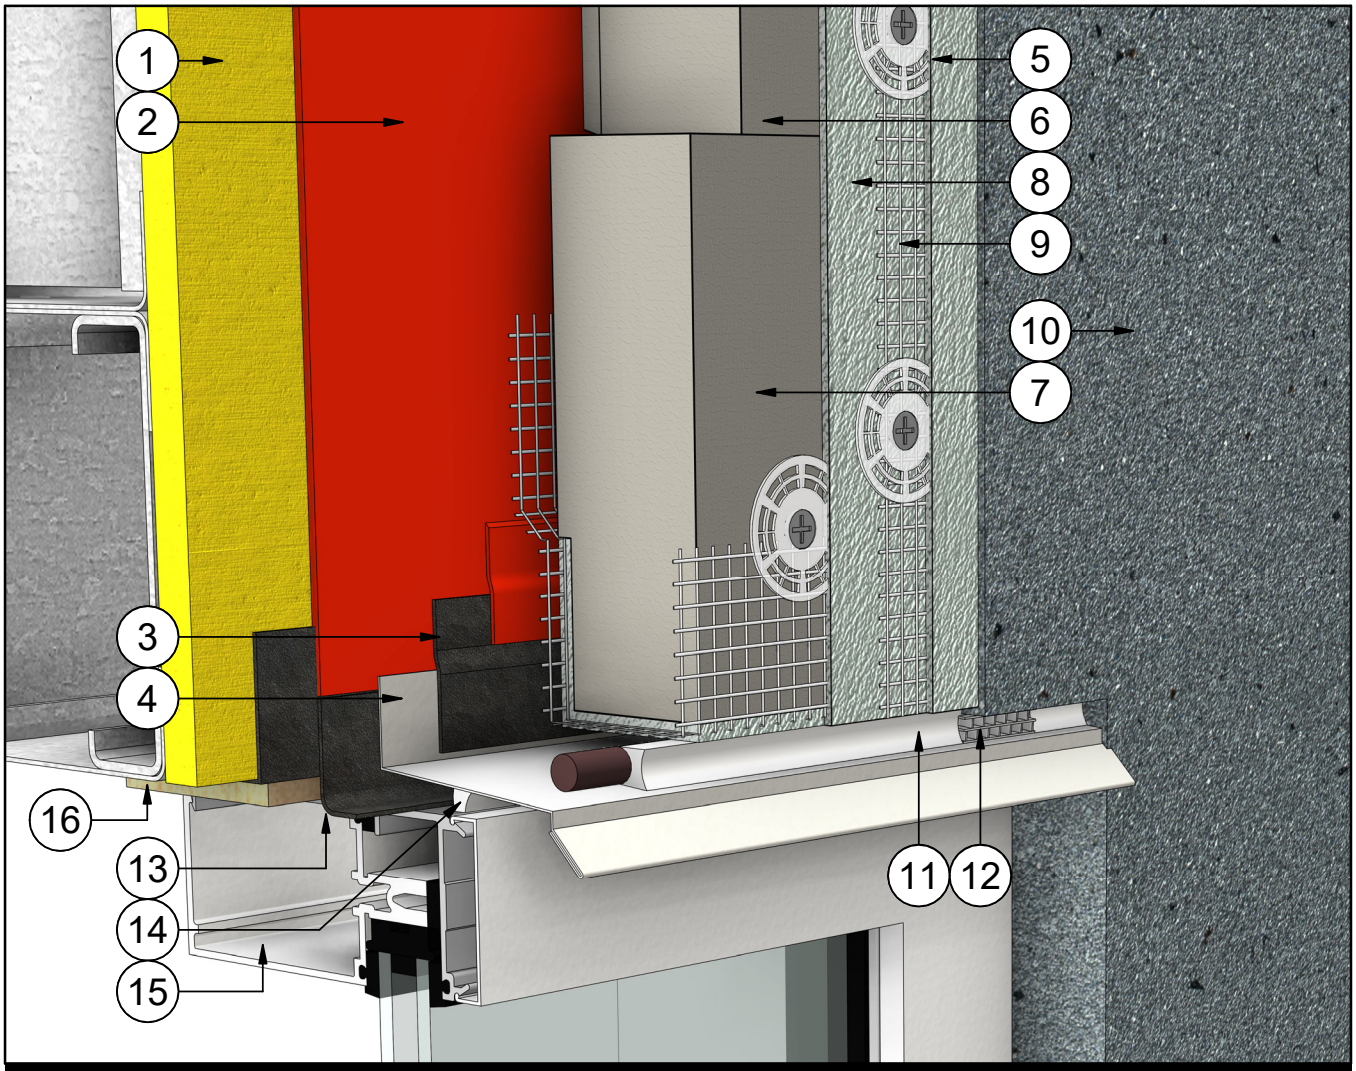

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	7	Insulite Select Vent Board
2	WRB - Water Resistive Barrier	10	Finish Coat
3	Tie In Membrane & Primer	11	Backer Rod & Sealant
4	Flashing w/ End Dams	12	Sealant Vent
5	Insulation Fastener w/ Plate	13	Transition Membrane
6	Insulite Select Insulation Board	14	Sealant
8	Base Coat	15	Window Assembly
9	Fibreglass Reinforcing Mesh (Embedded in Base Coat)	16	Wood Blocking

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET304_R2

WINDOW HEAD (OPTION B)

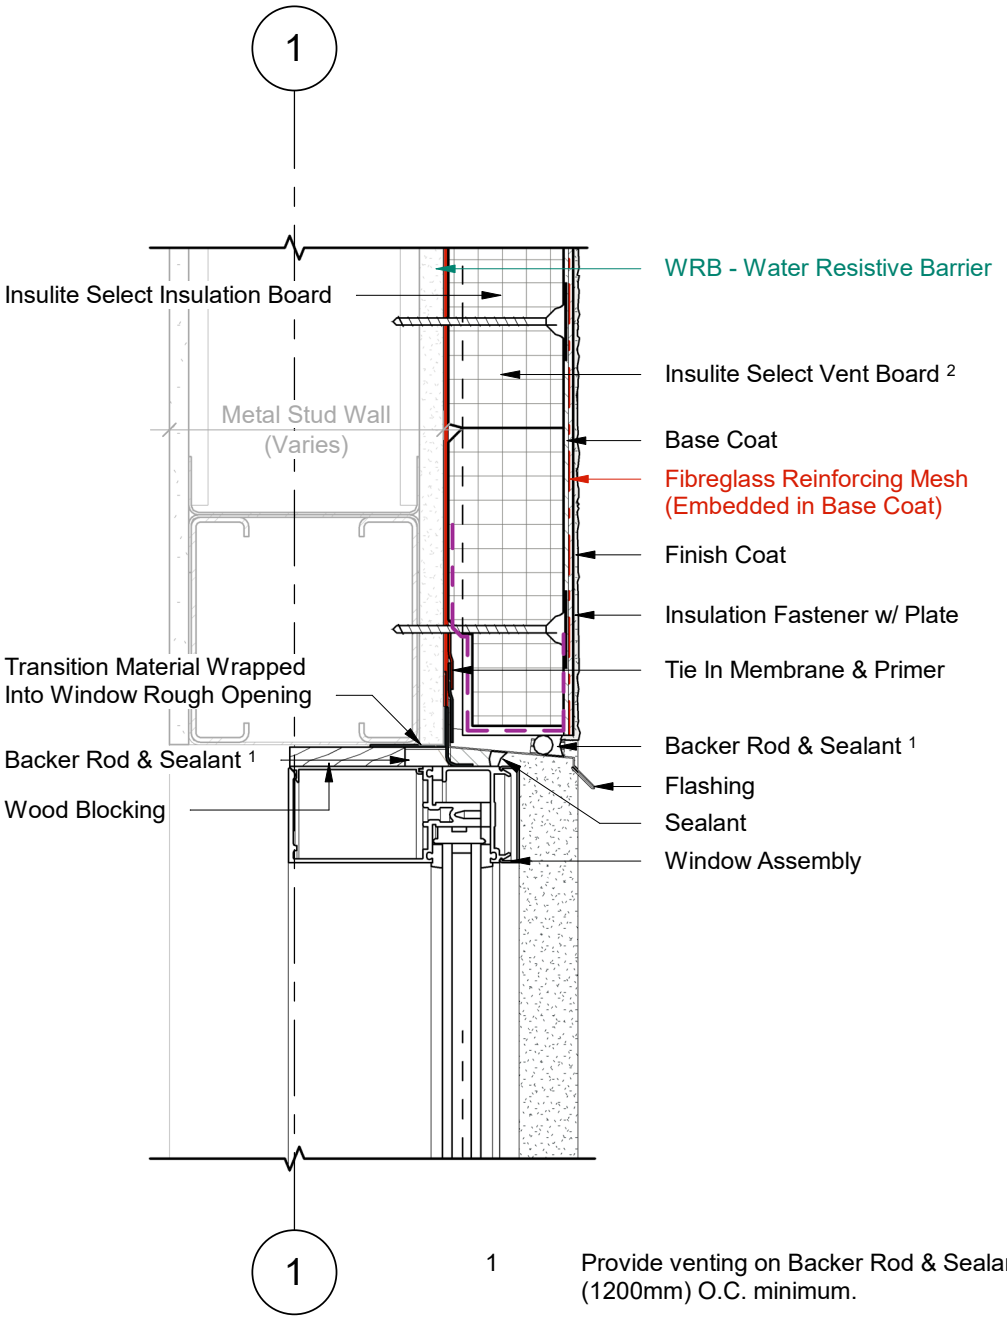

1/2 Wall Section
Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

WINDOW HEAD (OPTION B)

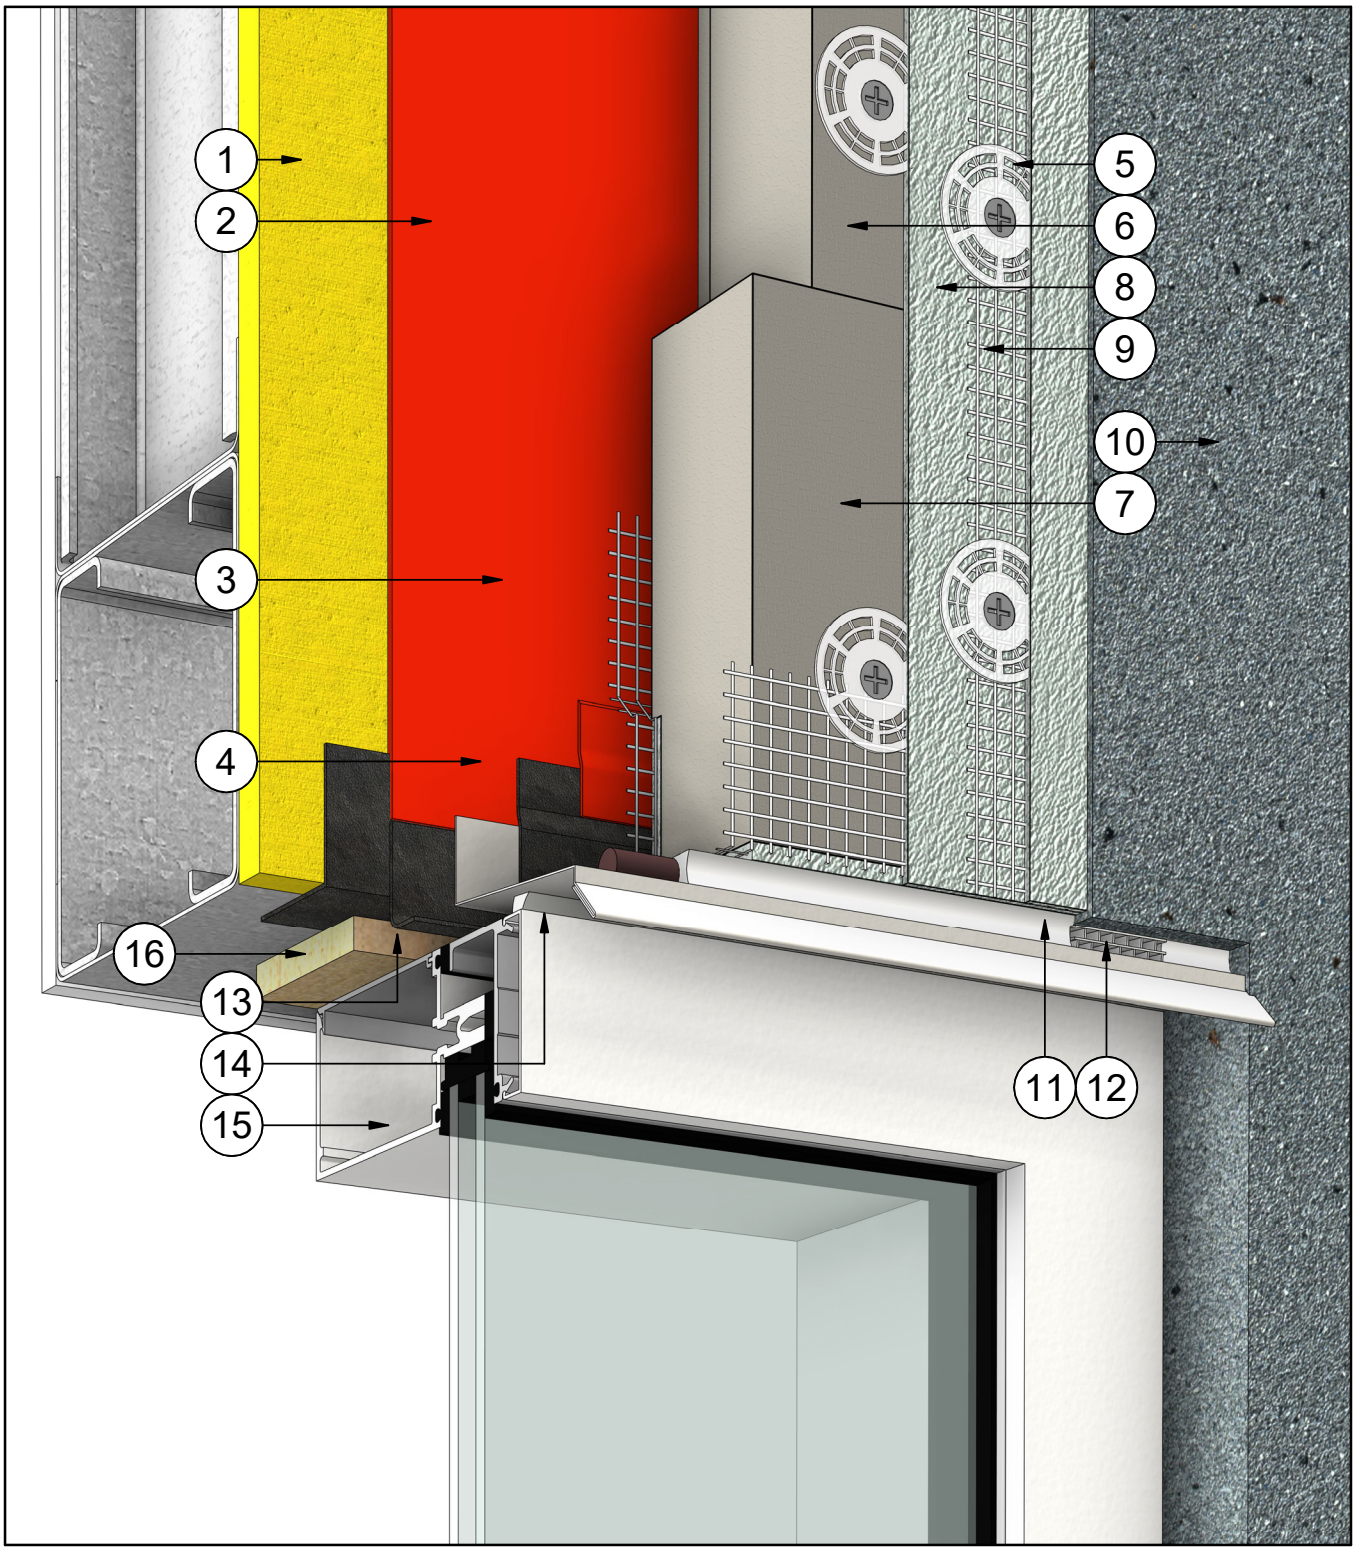

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET305_R2

WINDOW SILL (OPTION B)

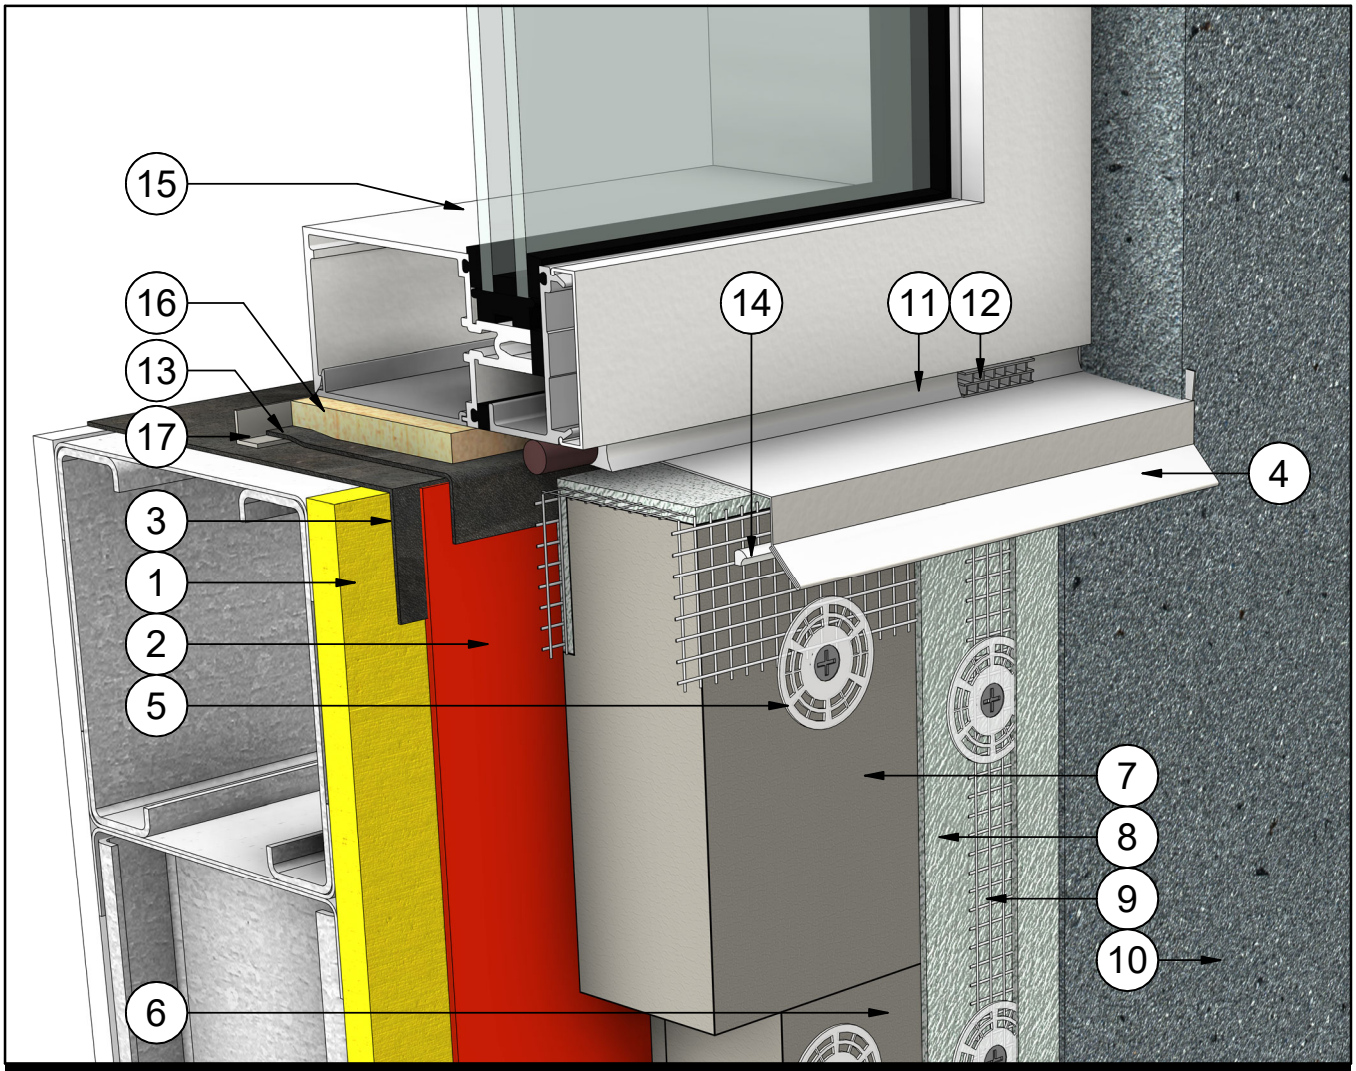

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	10	Finish Coat
2	WRB - Water Resistive Barrier	11	Backer Rod & Sealant
3	Transition Membrane	12	Sealant Vent
4	Flashing w/ End Dams	13	Transition Membrane
5	Insulation Fastener w/ Plate	14	Sealant
6	Insulite Select Insulation Board	15	Window Assembly
7	Insulite Select Vent Board	16	Wood Blocking
8	Base Coat	17	Drip Deflector
9	Fibreglass Reinforcing Mesh (Embedded in Base Coat)		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET305_R2

WINDOW SILL (OPTION B)

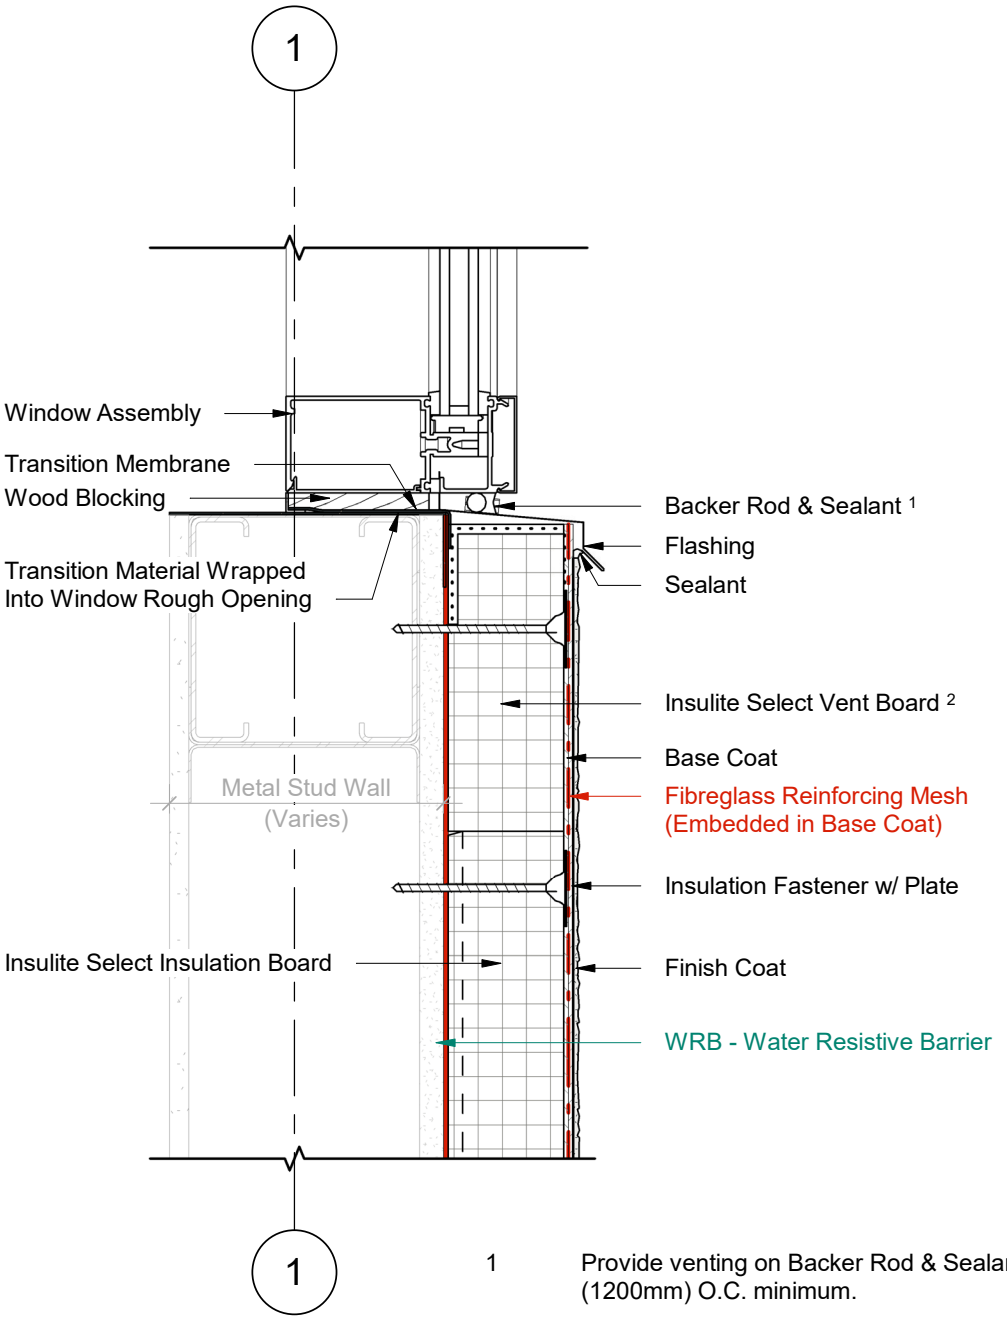

1 / 2 Wall Section
Scale = 1 : 5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET305_R2

WINDOW SILL (OPTION B)

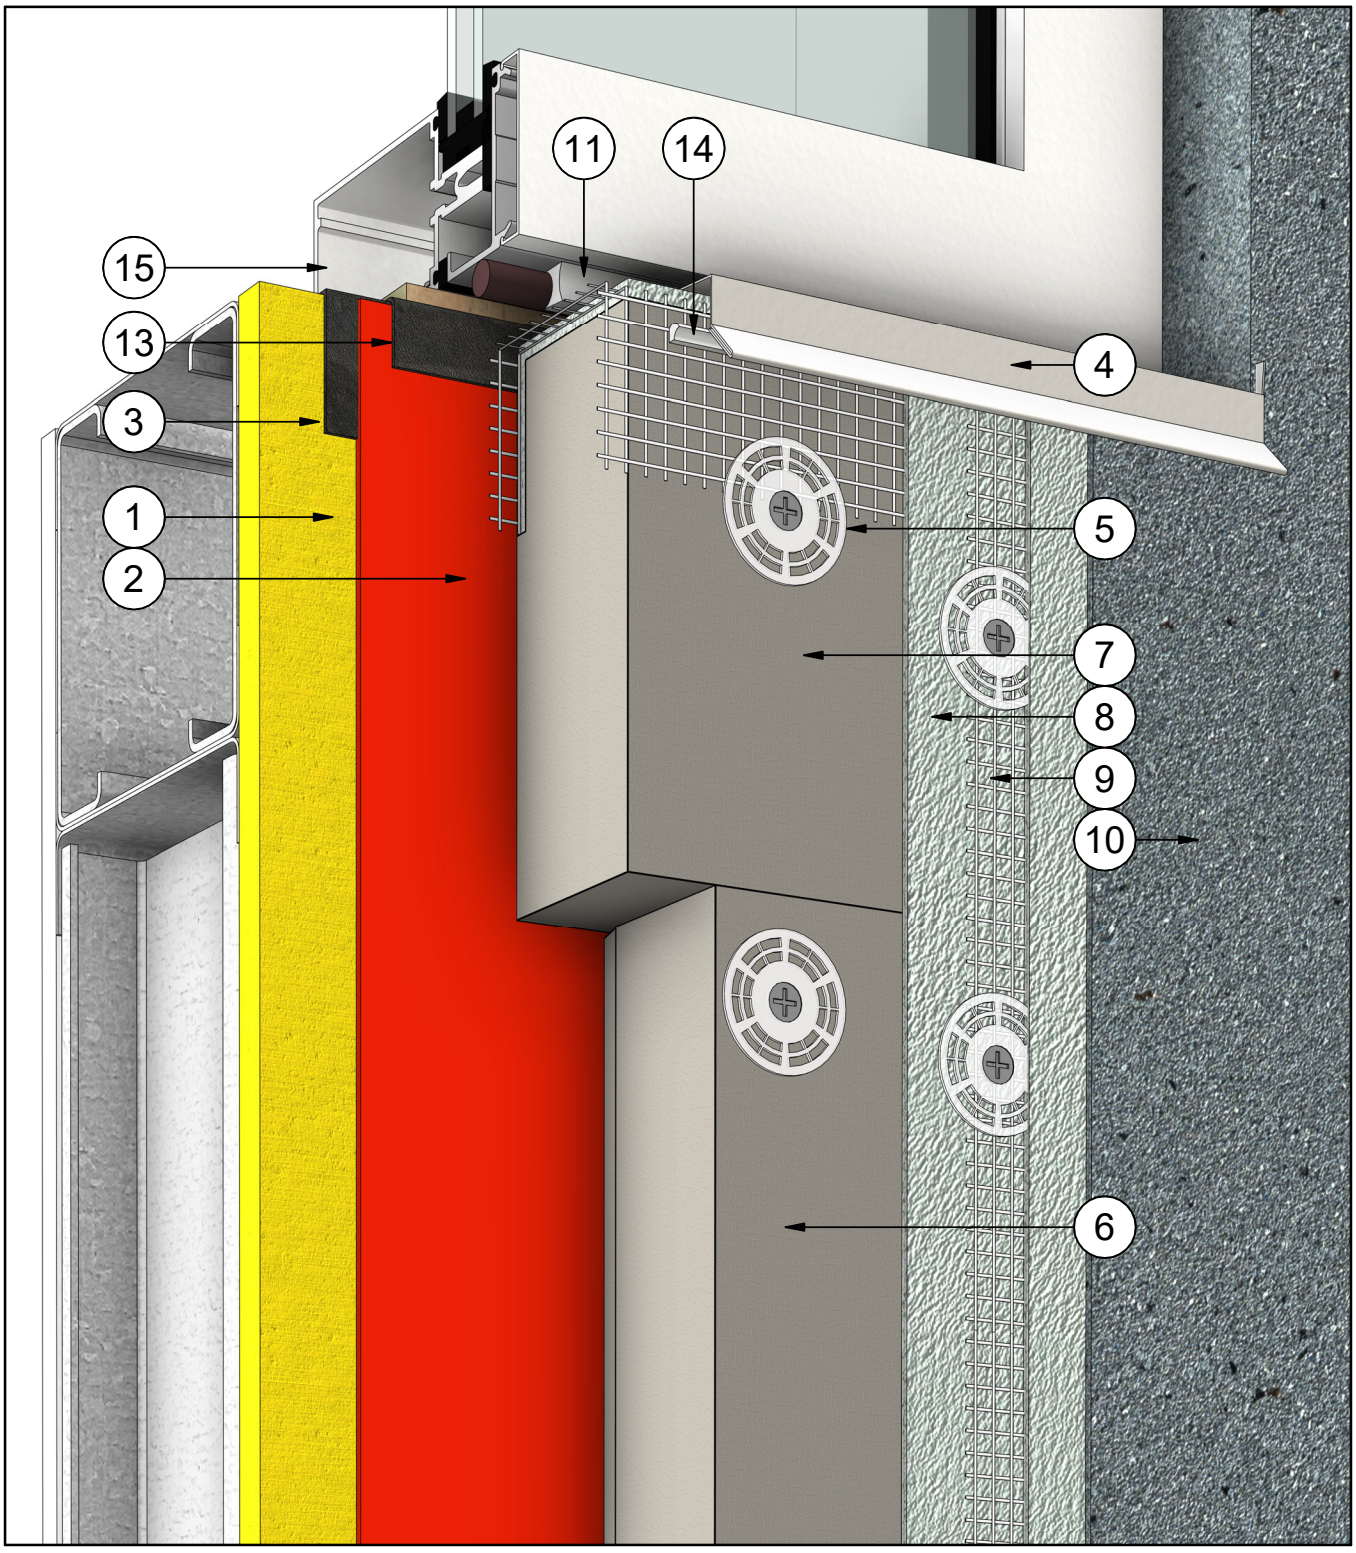

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET306_R2

WINDOW JAMB (OPTION B)

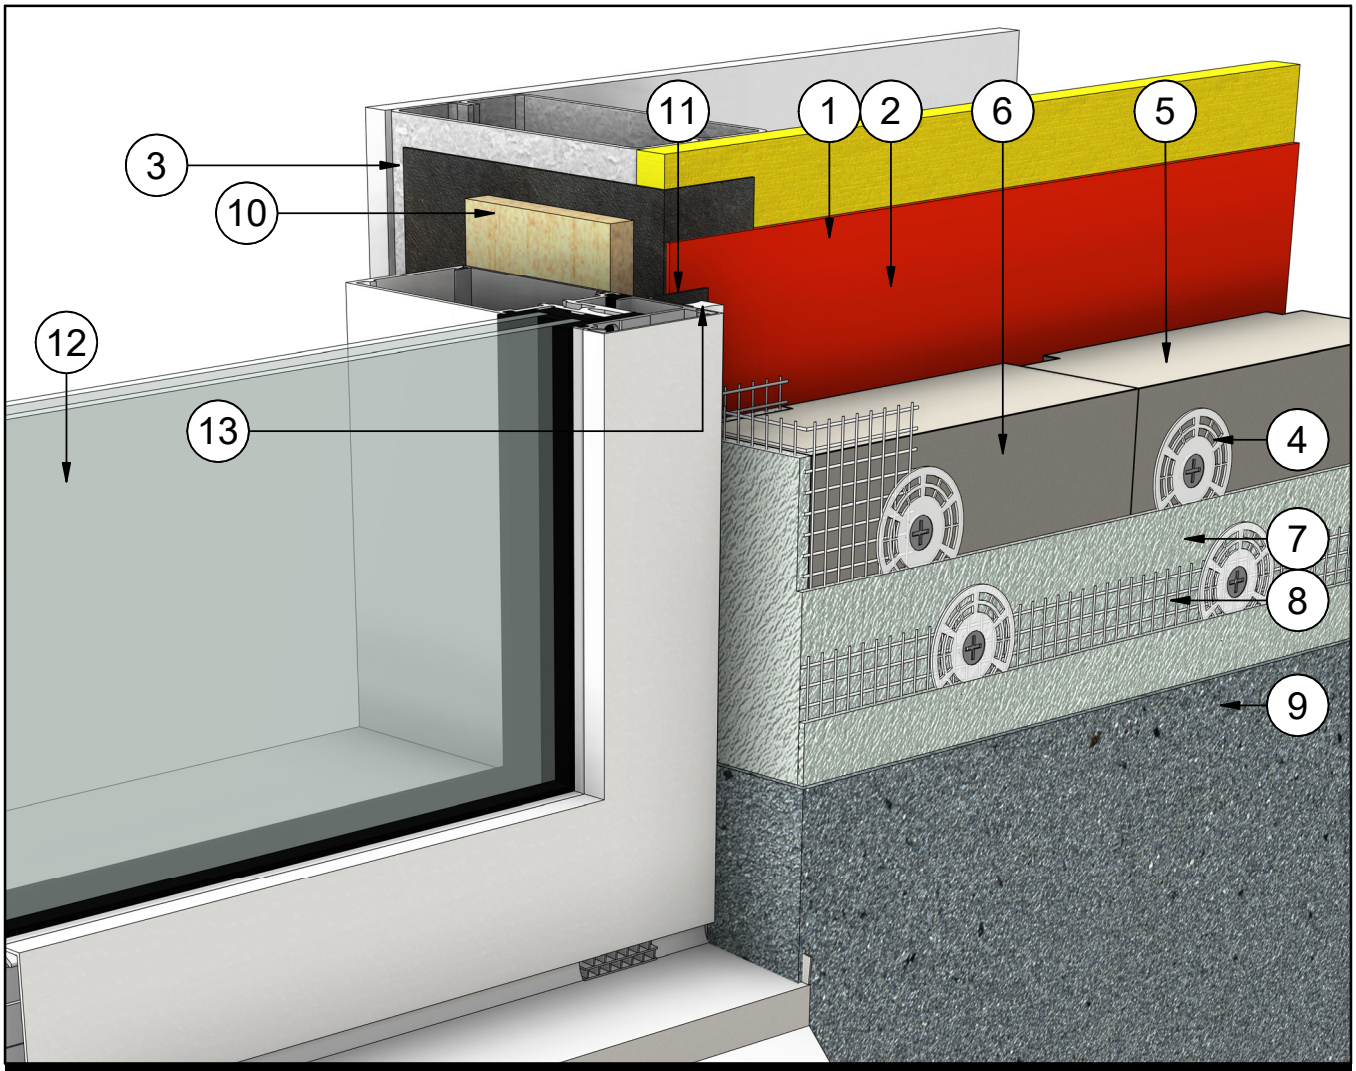

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	9	Finish Coat
2	WRB - Water Resistive Barrier	10	Wood Blocking
3	Transition Membrane	11	Transition Membrane
4	Insulation Fastener w/ Plate	12	Window Assembly
5	Insulite Select Insulation Board	13	Sealant
6	Insulite Select Boundary Board		
7	Base Coat		
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET306_R2

WINDOW JAMB (OPTION B)

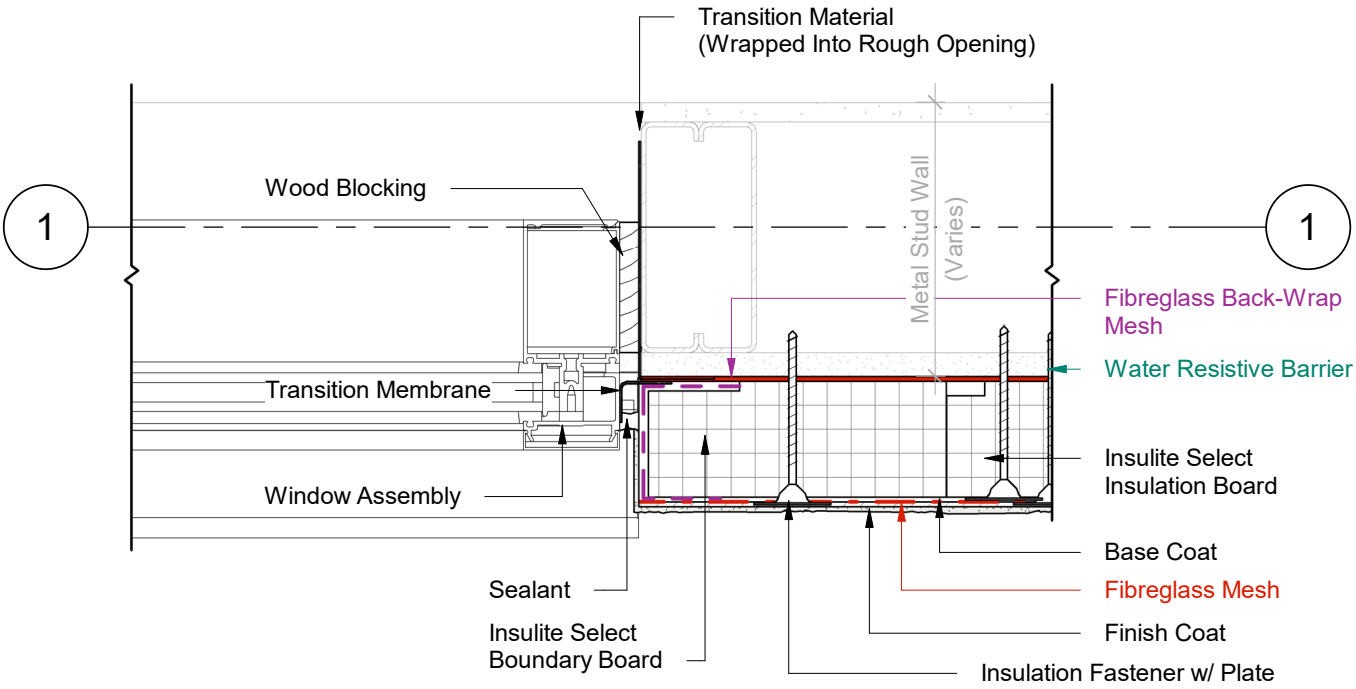

1/2 Plan Detail

Scale = 1:5

1 Provide venting on Backer Rod & Sealant every 48" (1200mm) O.C. minimum.

2 Insulite Select Vent Board includes vertical drainage channels & a 2.5" (64mm) back wrapped mesh that is adhered to the board with a Base Coat layer.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

WINDOW JAMB (OPTION B)

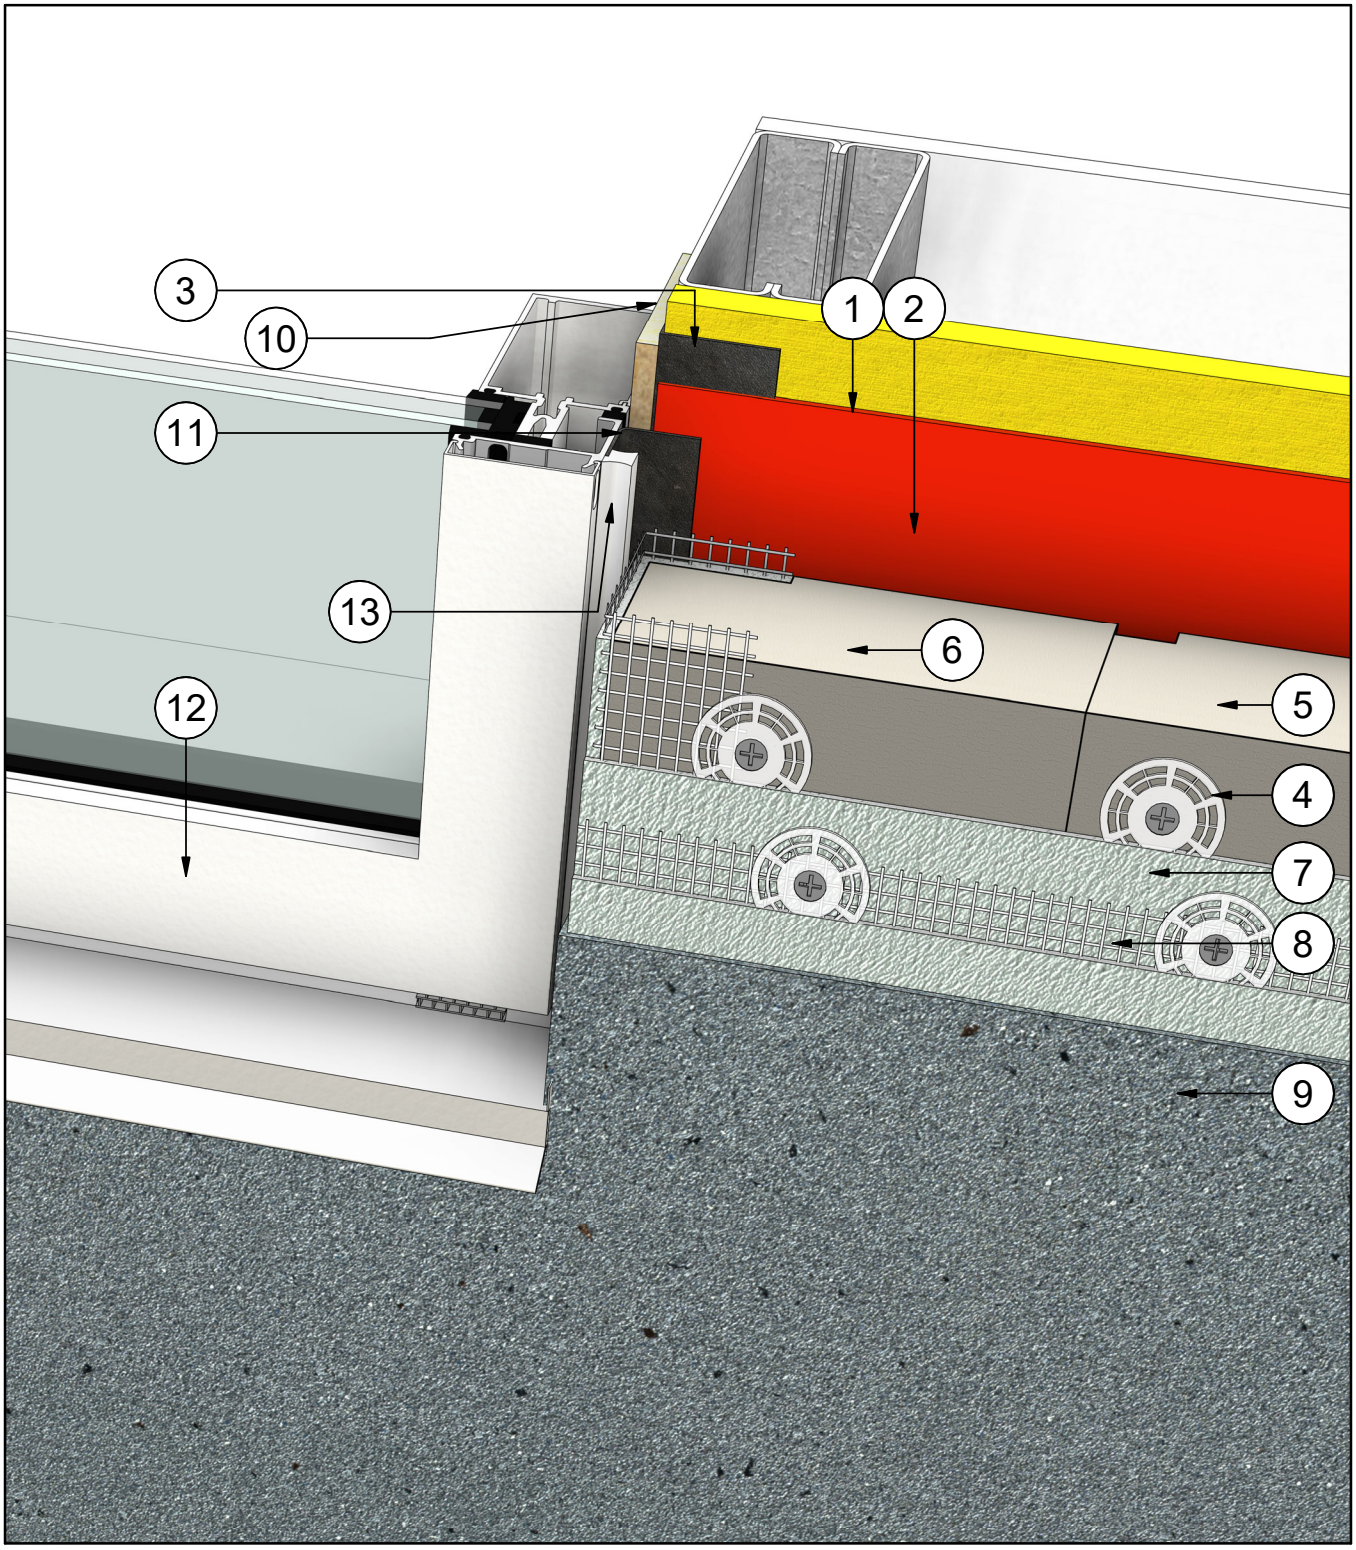

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET401_R2

PARAPET DETAIL

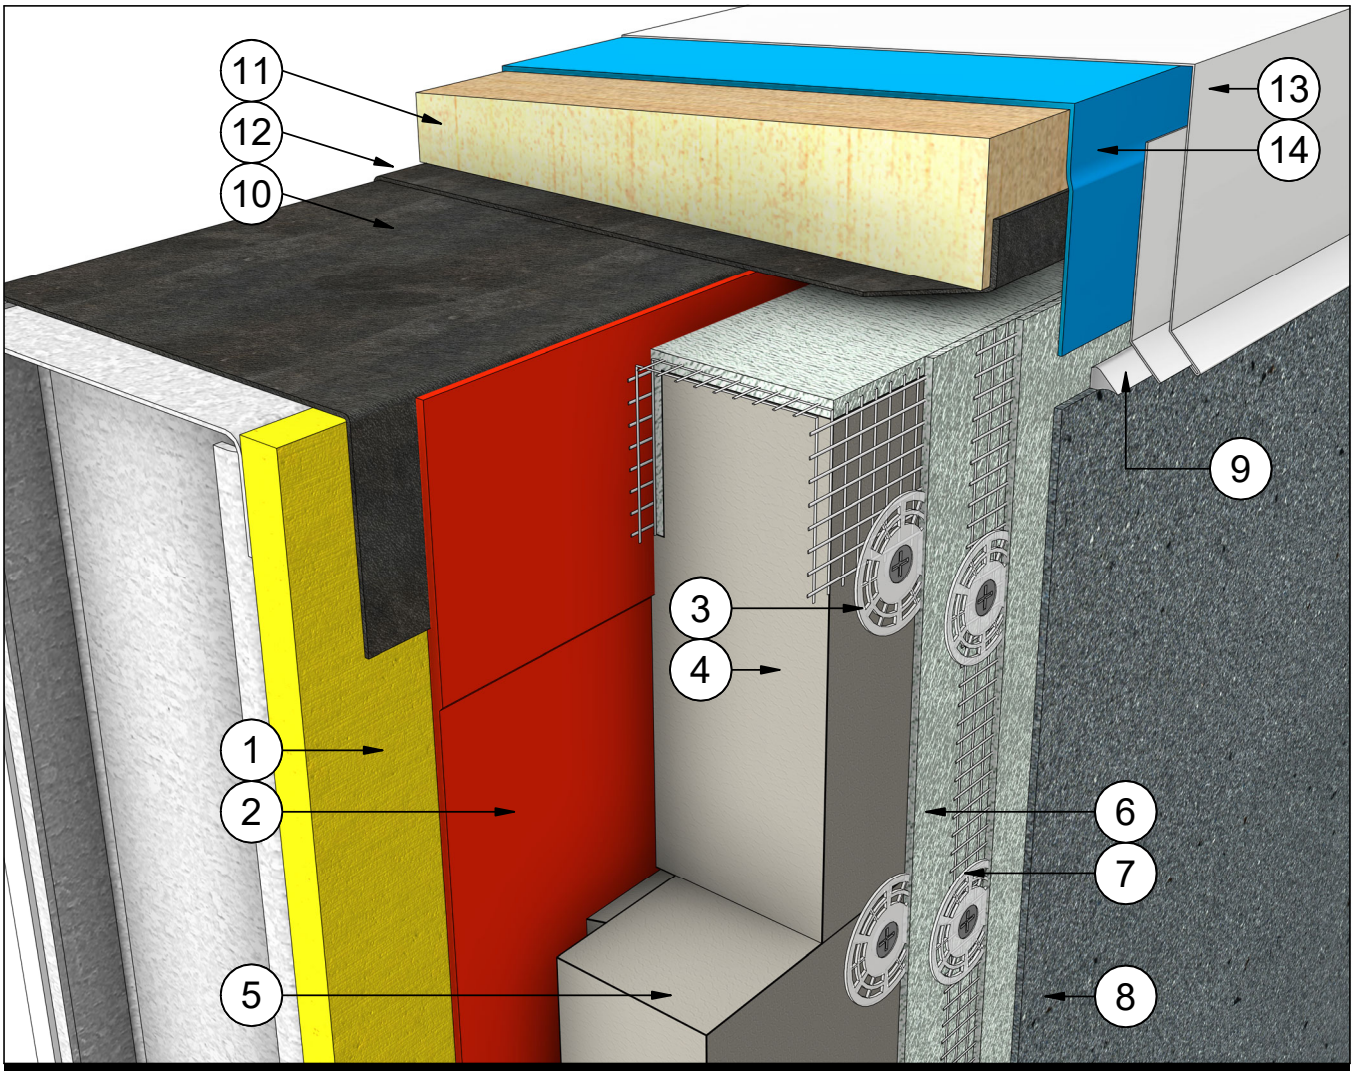

#	Note Text	#	Note Text
1	Steel Studs Frame & Sheathing	9	Low Modulus Sealant
2	Water Resistive Barrier	10	Transition Material Over Wall Assembly
3	Insulation Fastener w/ Plate	11	Wood Blocking
4	Insulite Select Boundary Board	12	Transition Material from Back of Wall to Front of Wall
5	Insulite Select Insulation Board	13	Parapet Flashing & Counterflashing
6	Base Coat	14	Roof System Waterproof Membrane
7	Fibreglass Reinforcing Mesh (Embedded in Base Coat)		
8	Finish Coat		

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET401_R2

PARAPET DETAIL

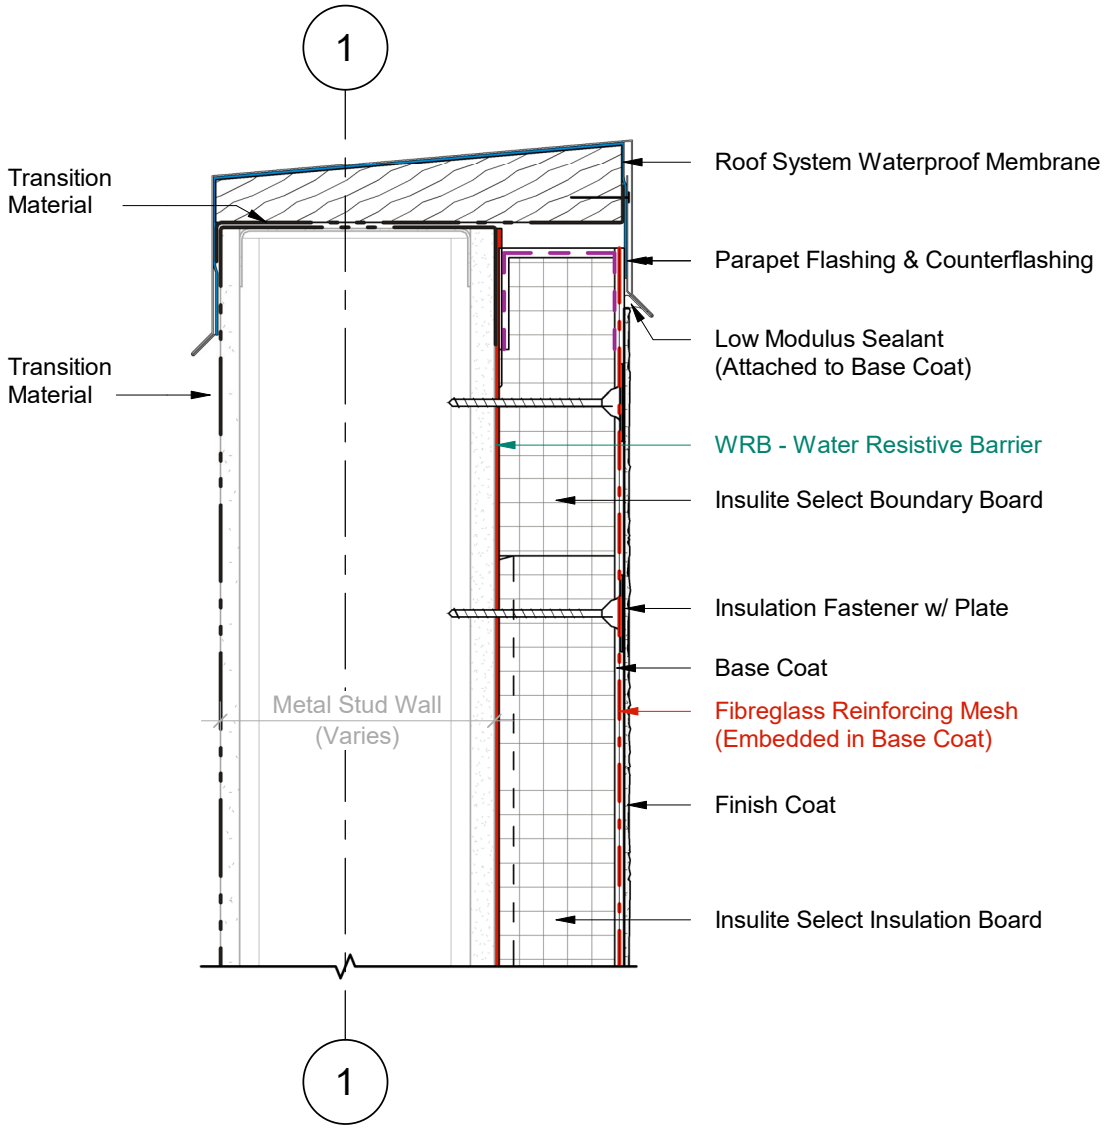

1/2 Wall Section

Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET401_R2

PARAPET DETAIL

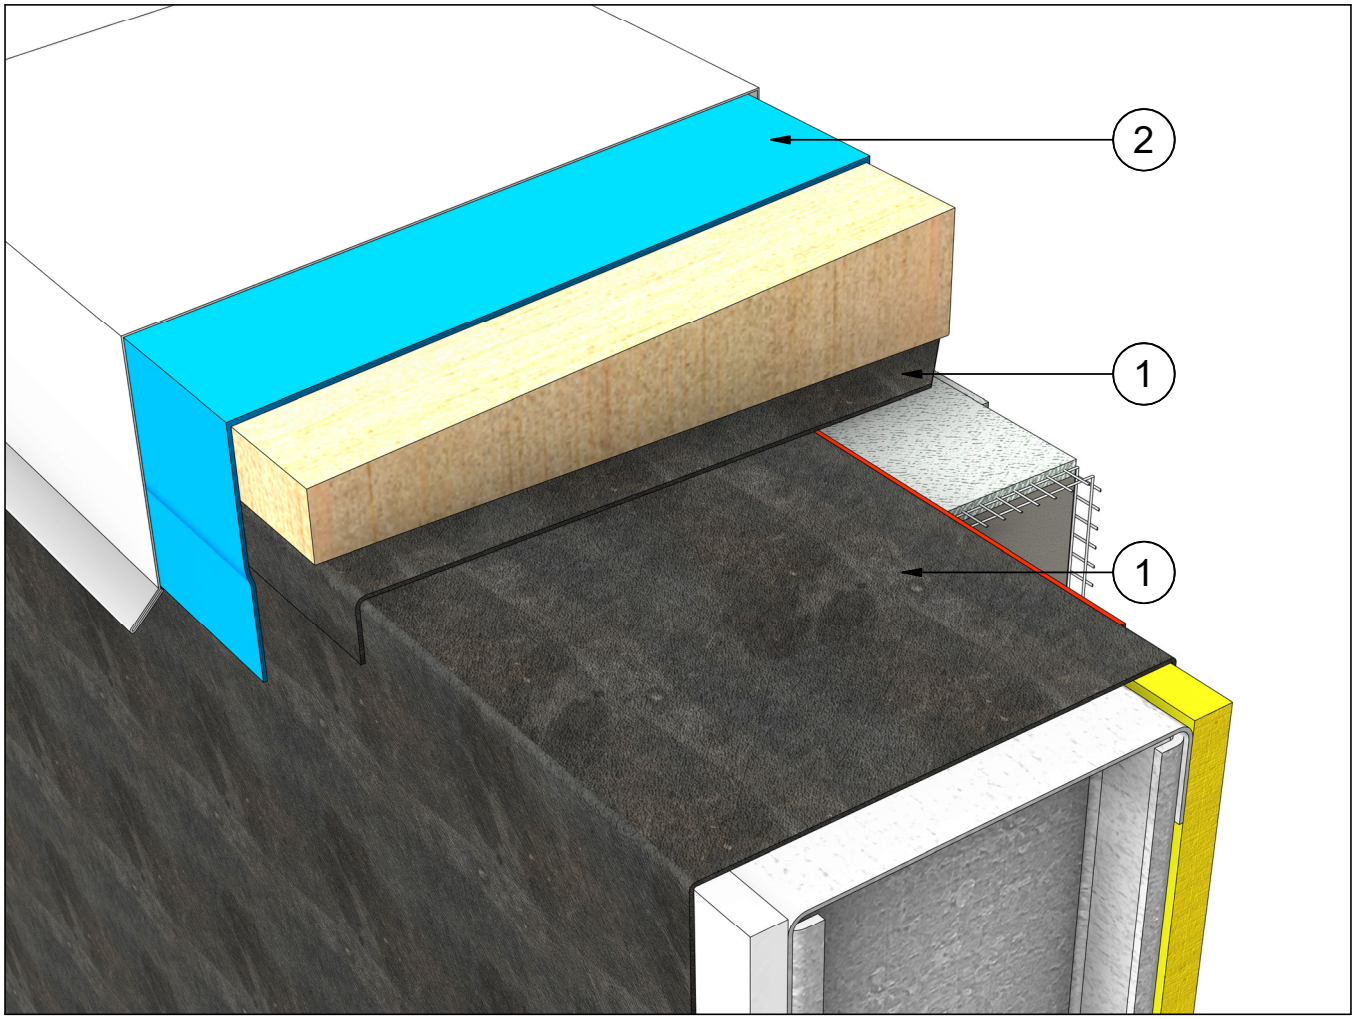

MEMBRANE SPECIFICS

1 Transition Material

There are two **transition membranes** needed to complete the parapet. The first membrane transitions between the backside of the wall and the water resistive barrier.

The second membrane then lines the bottom of the wood blocking. It gets overlapped on both sides of the wall by the **air & vapour barrier**. These two layers of transition material ensure that the drainage remains positive at both the front & back of the wall.

2 Roof System Waterproof Membrane

The roof waterproofing membrane, typically an air & vapour barrier, is located directly beneath the metal flashing. It wraps over the enterity of the wall and ensures that the parapet is protected from the elements.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF ISMF_SGA_DET401_R2

PARAPET DETAIL

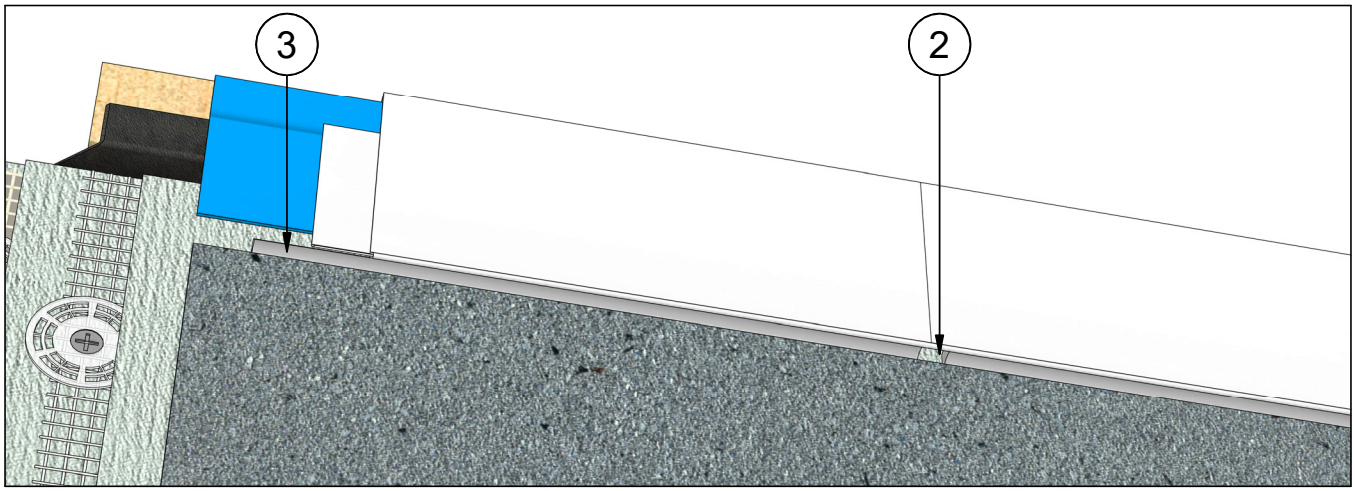

AIR SPACE & SEALANT SPECIFICS

1 Provide a 1/2" (13mm) Air Space

The air space at the top of the wall allows for the wall assembly to expand & contract freely without damaging the parapet.

2 Provide a 1/2" (13mm) Air Space

When the parapet has a seam in the metal flashing, the sealant should be broken to allow the system to vent freely.

3 Sealant Attached to Base Coat

The sealant is attached directly to the base layer. The finish coat is then applied to complete the wall; it abuts against the sealant.

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH OVERHANG

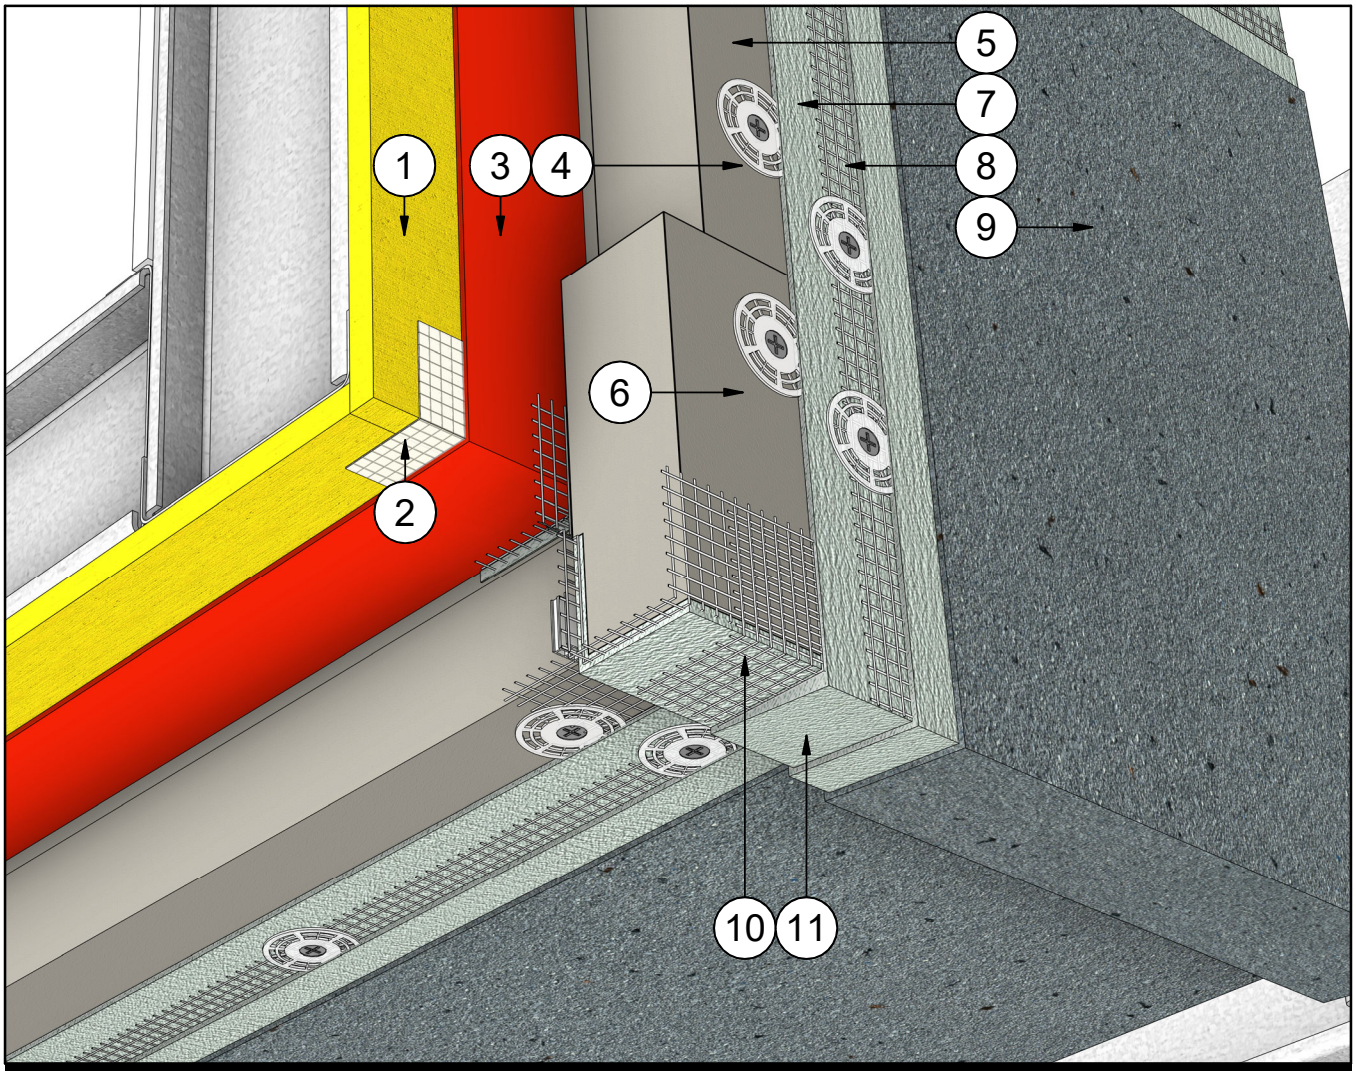

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Insulite Select Vent Board
7	Base Coat
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Fibreglass Corner Mesh (Embedded in Base Coat)
11	Base Coat Sloped for Drainage
12	Durex Continous Drainage Vent

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH OVERHANG

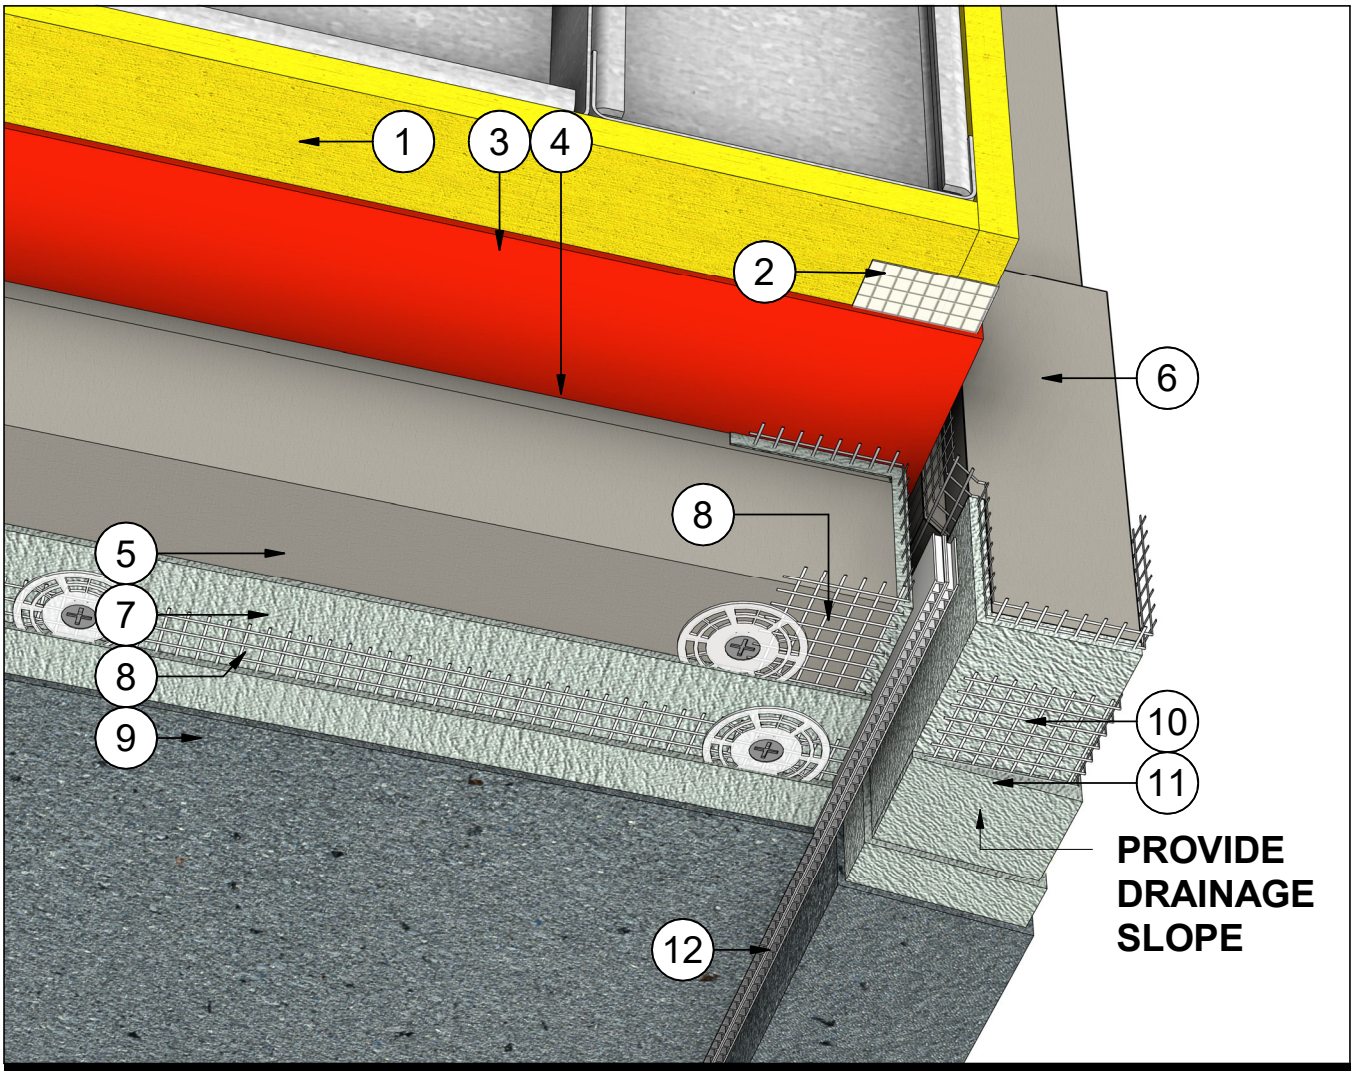

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Insulite Select Vent Board
7	Base Coat
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Fibreglass Corner Mesh (Embedded in Base Coat)
11	Base Coat Sloped for Drainage
12	Durex Continous Drainage Vent

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH OVERHANG

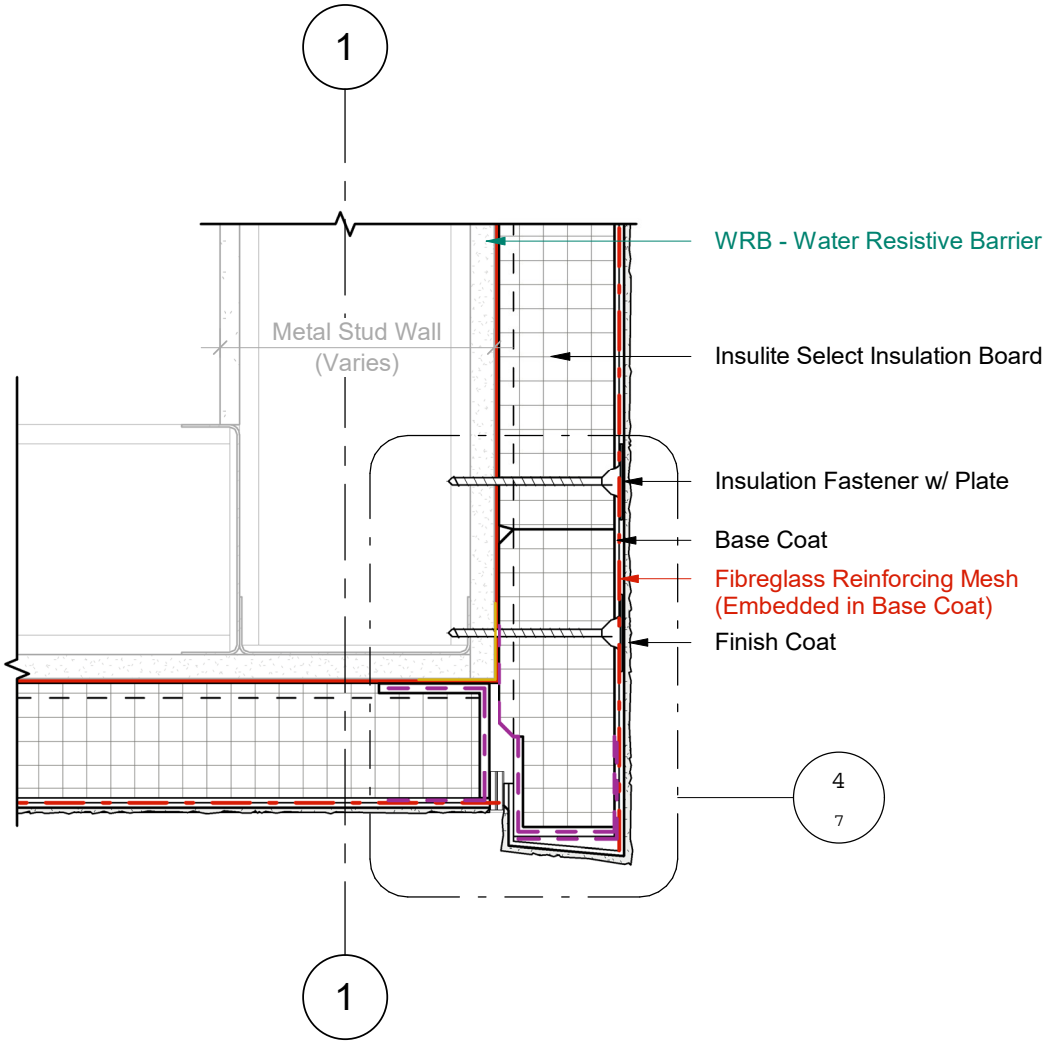

1/3 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

INSULITE SELECT MF

ISMF_SGA_DET501_R2

SOFFIT INTERFACE WITH OVERHANG

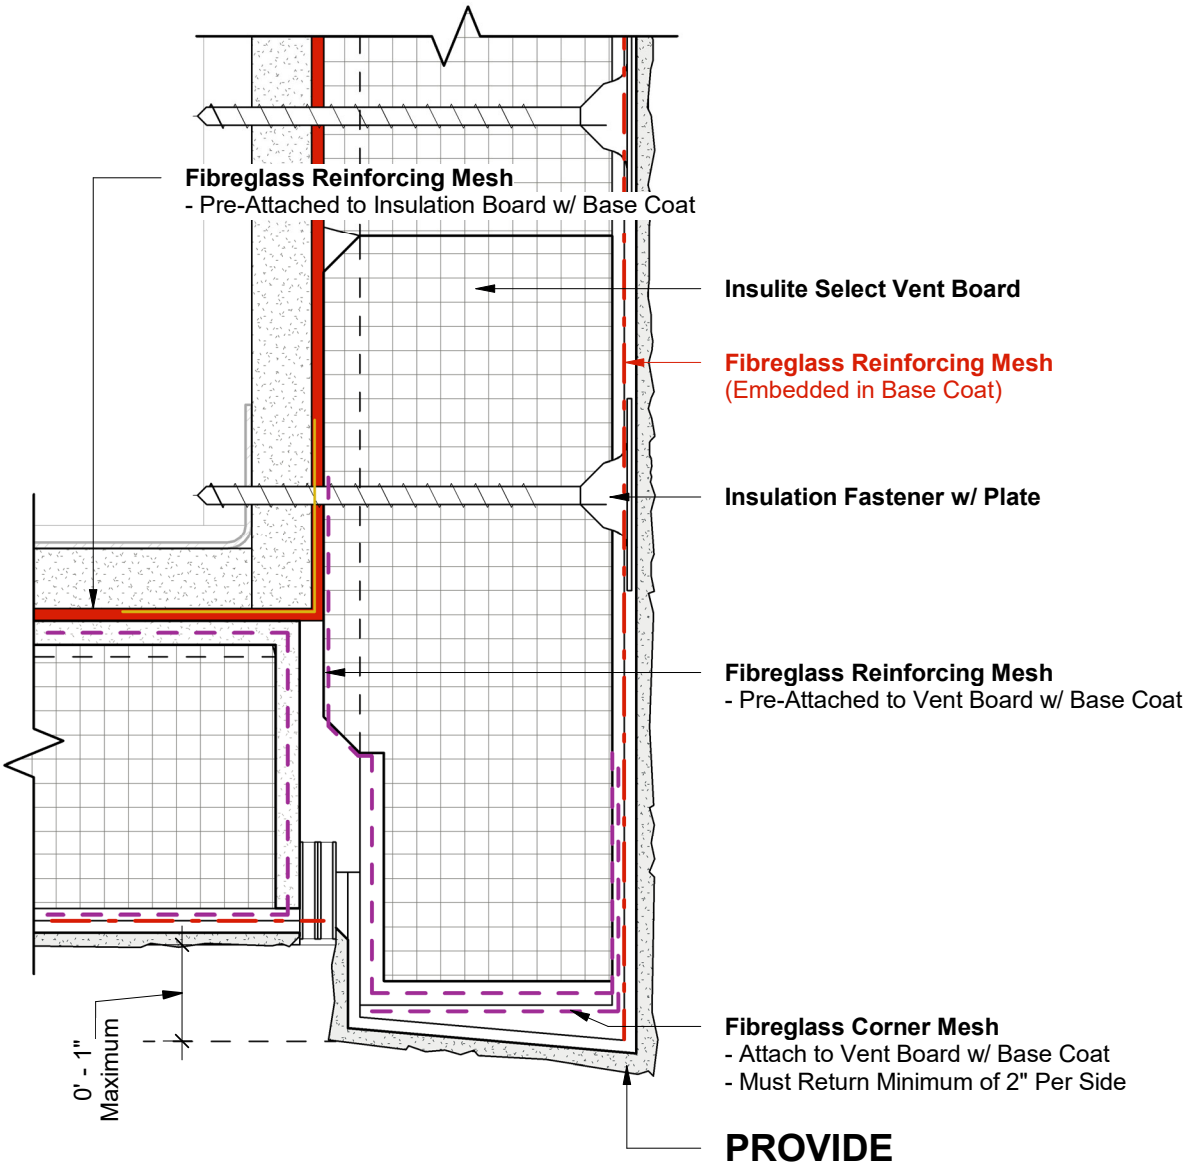

1/4 Wall Section - Callout 1

Scale = 6" = 1'-0"

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH FLUSH JOINT

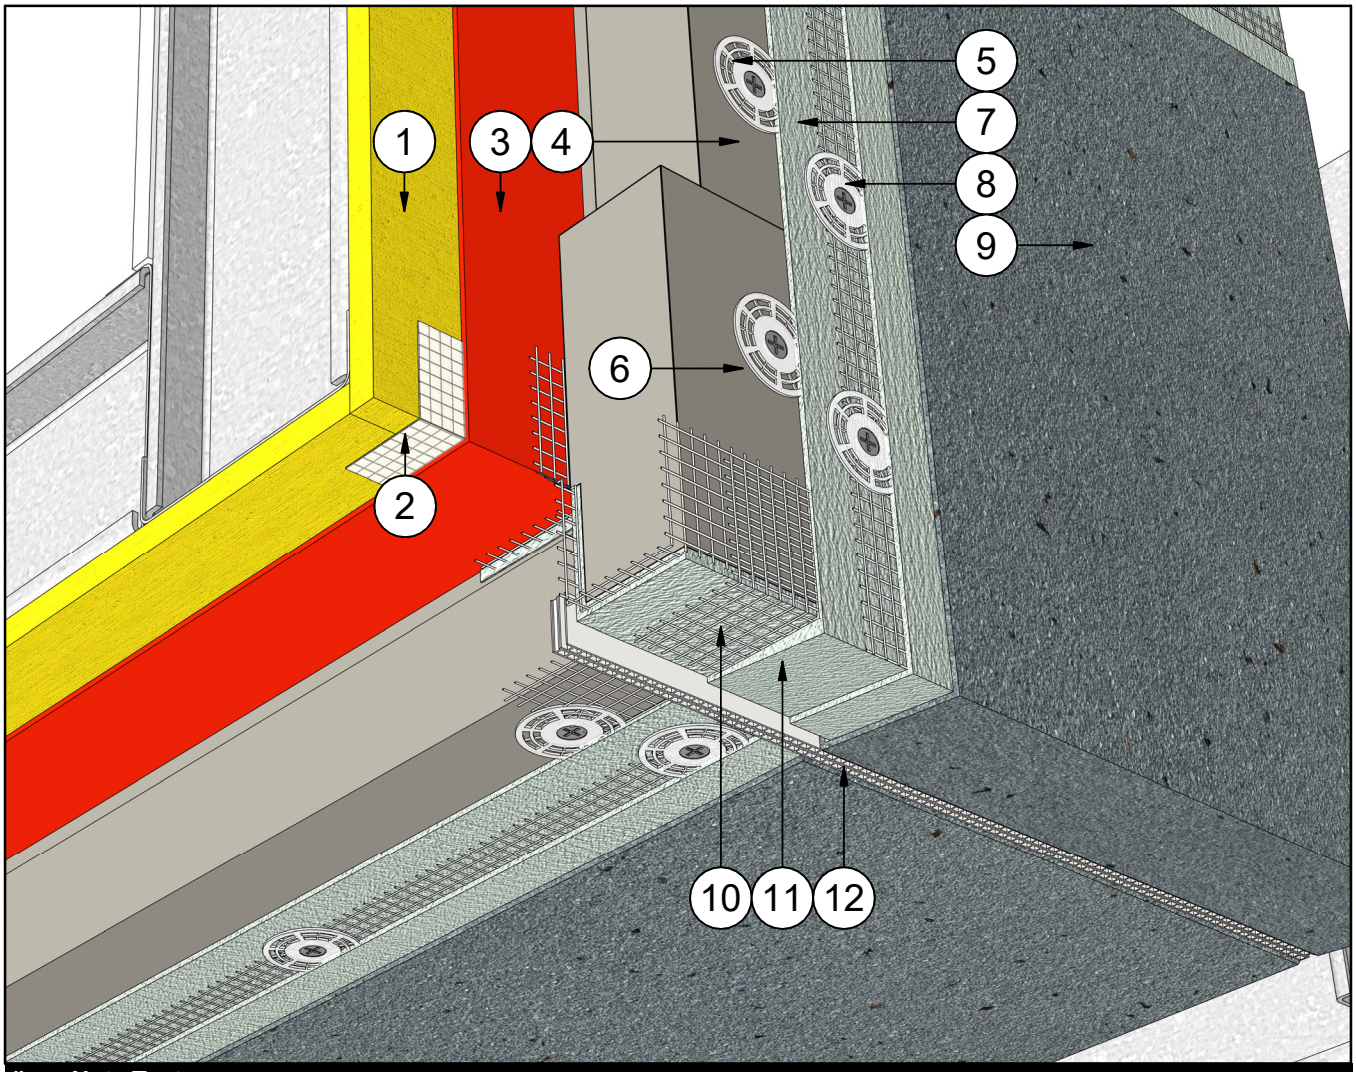

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Insulite Select Vent Board
7	Base Coat
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Fibreglass Corner Mesh (Embedded in Base Coat)
11	Base Coat Sloped for Drainage
12	Durex Continous Drainage Vent

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH FLUSH JOINT

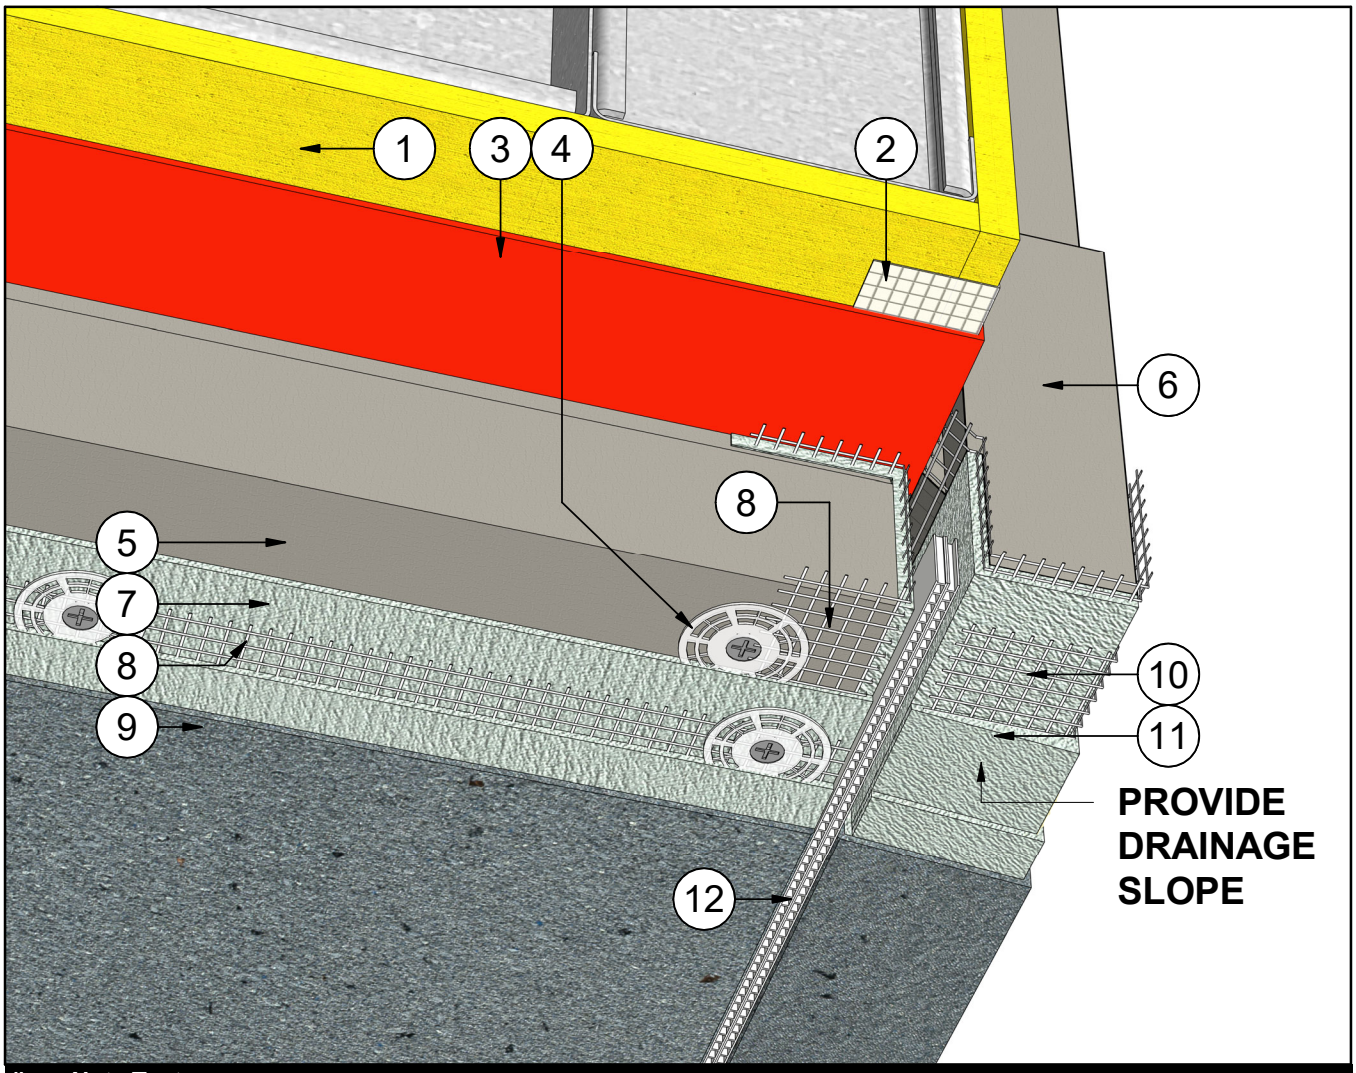

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Insulite Select Vent Board
7	Base Coat
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Fibreglass Corner Mesh (Embedded in Base Coat)
11	Base Coat Sloped for Drainage
12	Durex Continous Drainage Vent

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH FLUSH JOINT

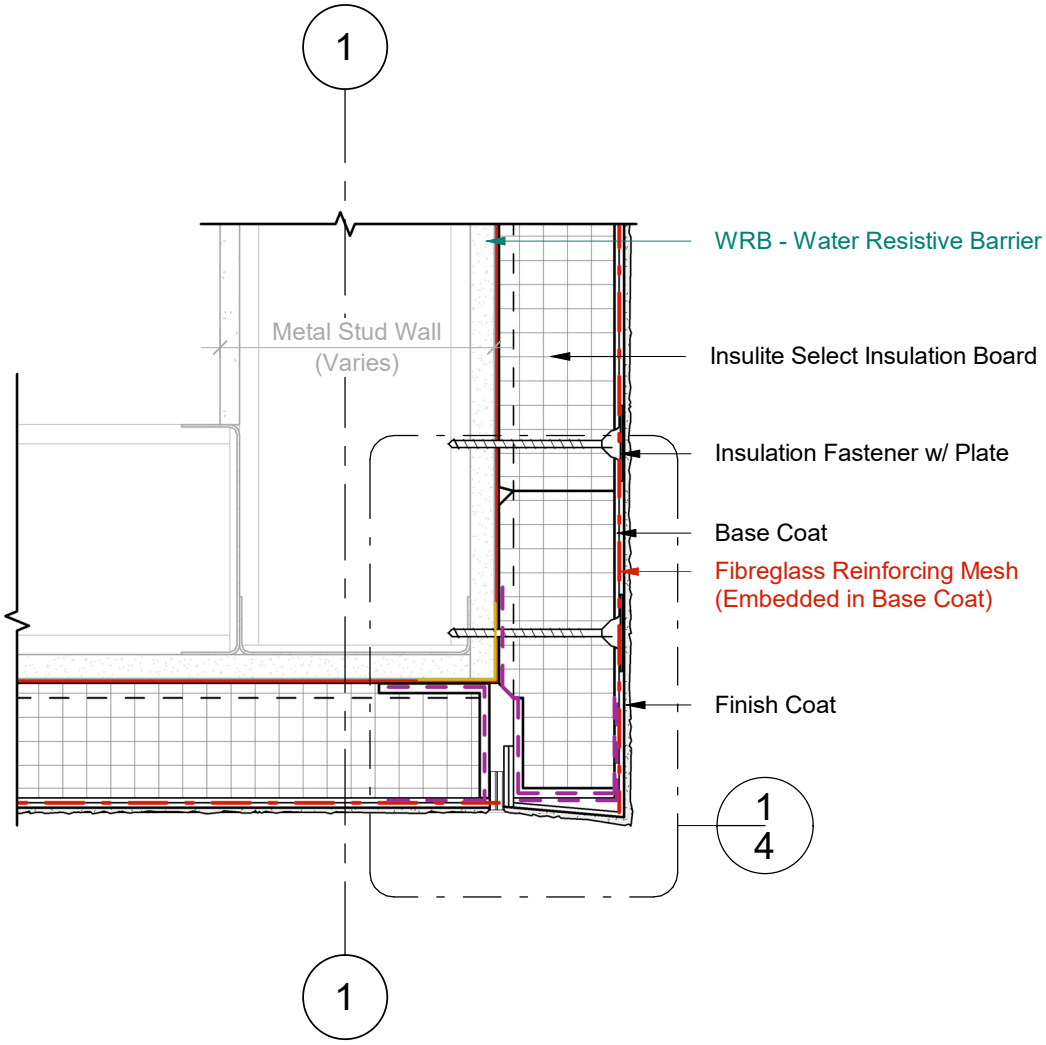

1/3 Wall Section
Scale = 1 : 5

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

SOFFIT INTERFACE WITH FLUSH JOINT

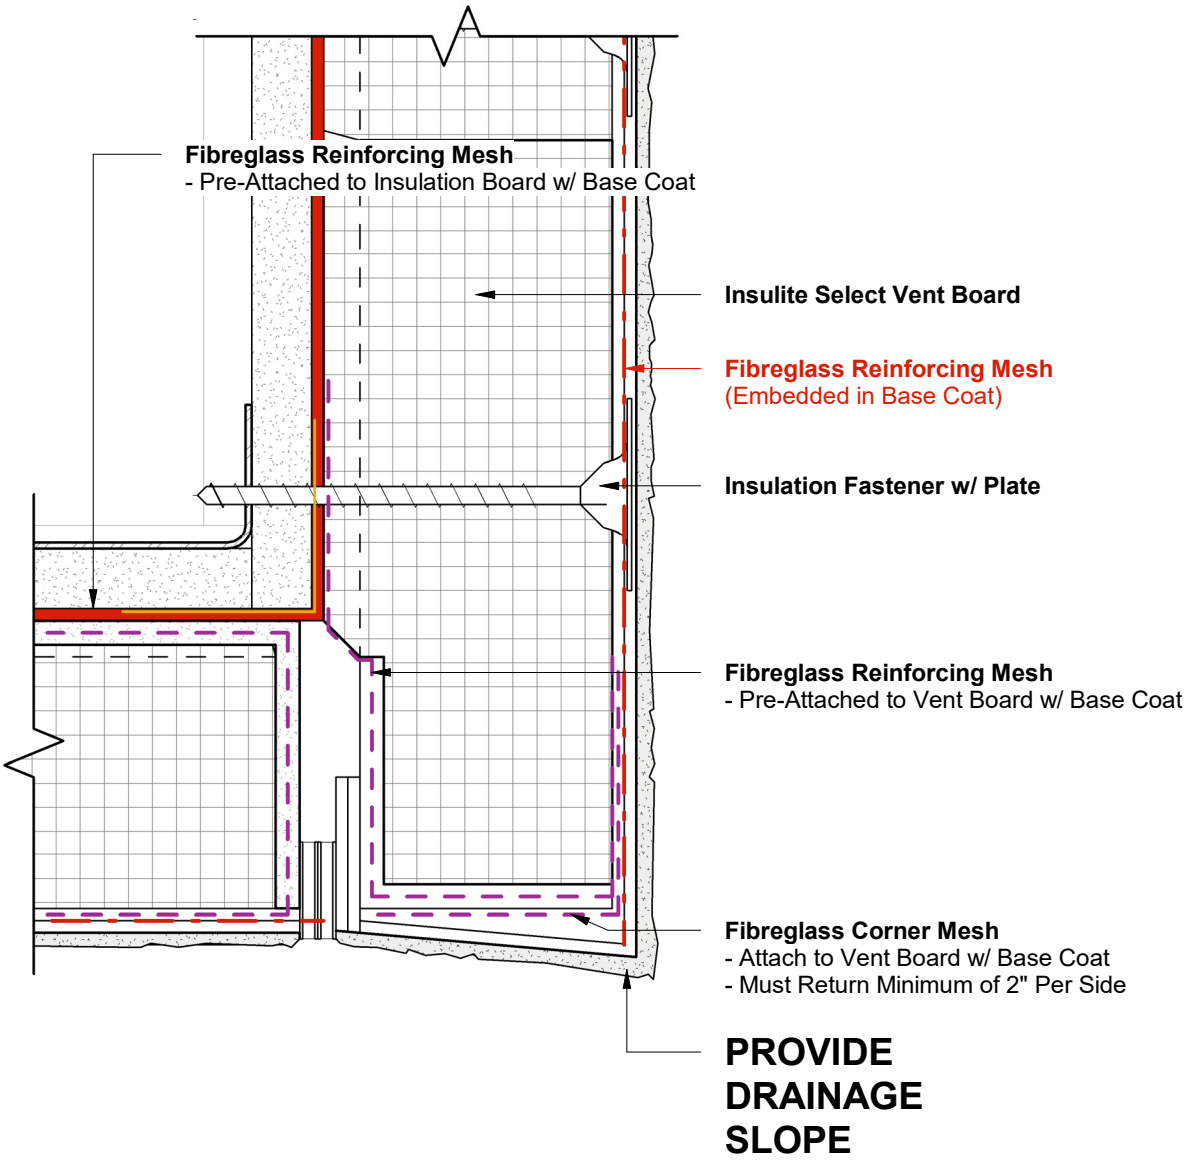

1/4 Wall Section - Callout 1
Scale = 6" = 1'-0"

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

STUCCO SOFFIT INTERFACE WITH FLUSH JOINT

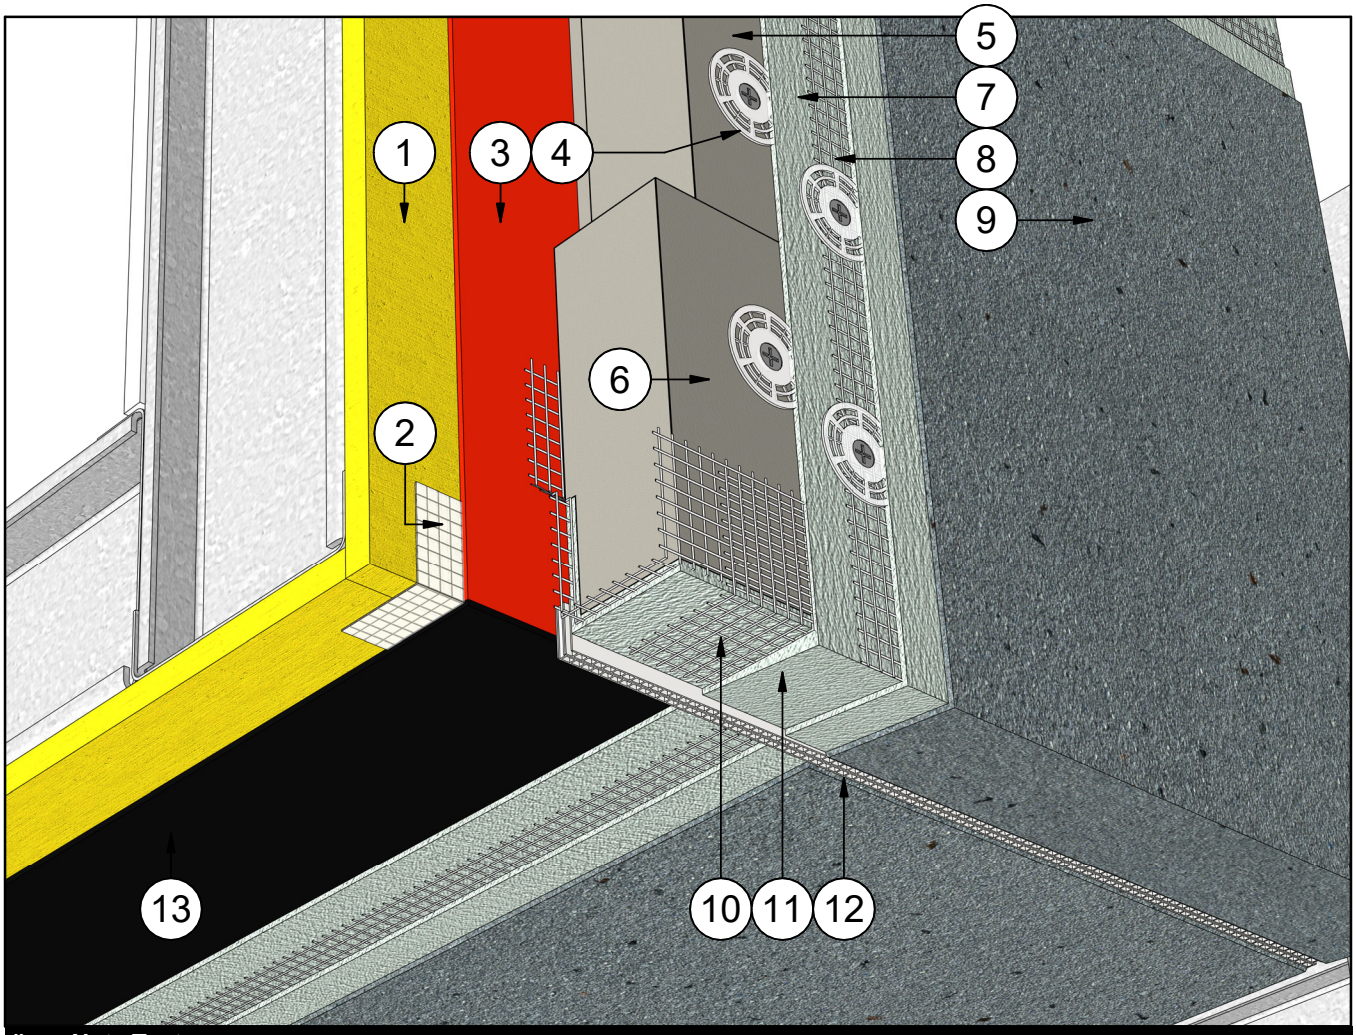

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Insulite Select Vent Board
7	Base Coat
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Fibreglass Corner Mesh (Embedded in Base Coat)
11	Base Coat Sloped for Drainage
12	Durex Continous Drainage Vent
13	Air & Vapour Barrier

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

STUCCO SOFFIT INTERFACE WITH FLUSH JOINT

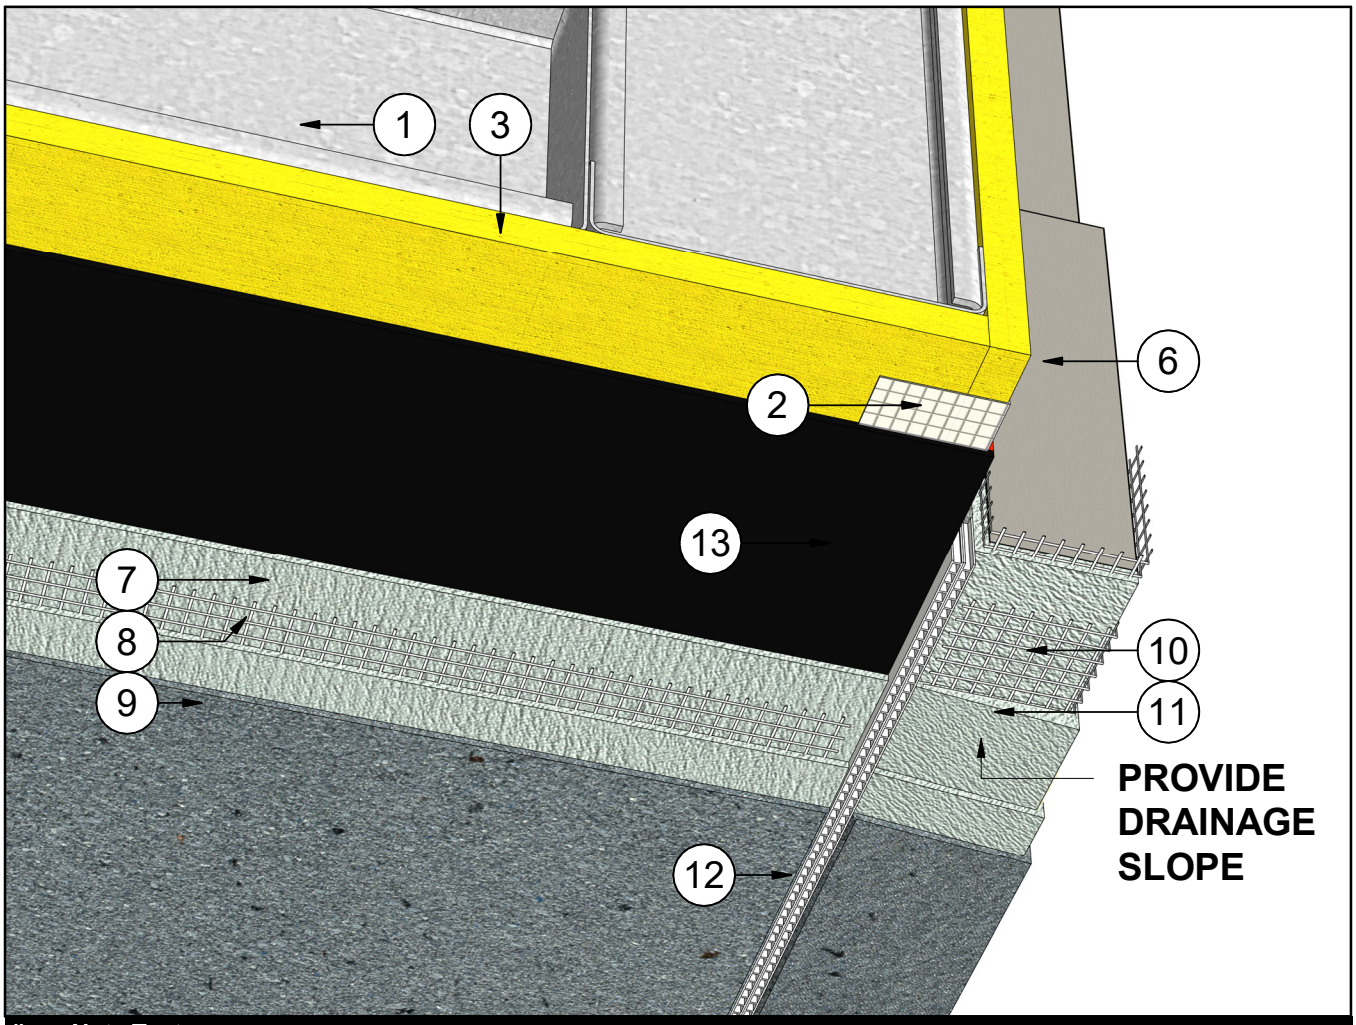

#	Note Text
1	Steel Studs Frame & Sheathing
2	Barrier Seam Tape (Embedded in WRB)
3	WRB - Water Resistive Barrier
4	Insulation Fastener w/ Plate
5	Insulite Select Insulation Board
6	Insulite Select Vent Board
7	Base Coat
8	Fibreglass Reinforcing Mesh (Embedded in Base Coat)
9	Finish Coat
10	Fibreglass Corner Mesh (Embedded in Base Coat)
11	Base Coat Sloped for Drainage
12	Durex Continous Drainage Vent
13	Air & Vapour Barrier

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

STUCCO SOFFIT INTERFACE WITH FLUSH JOINT

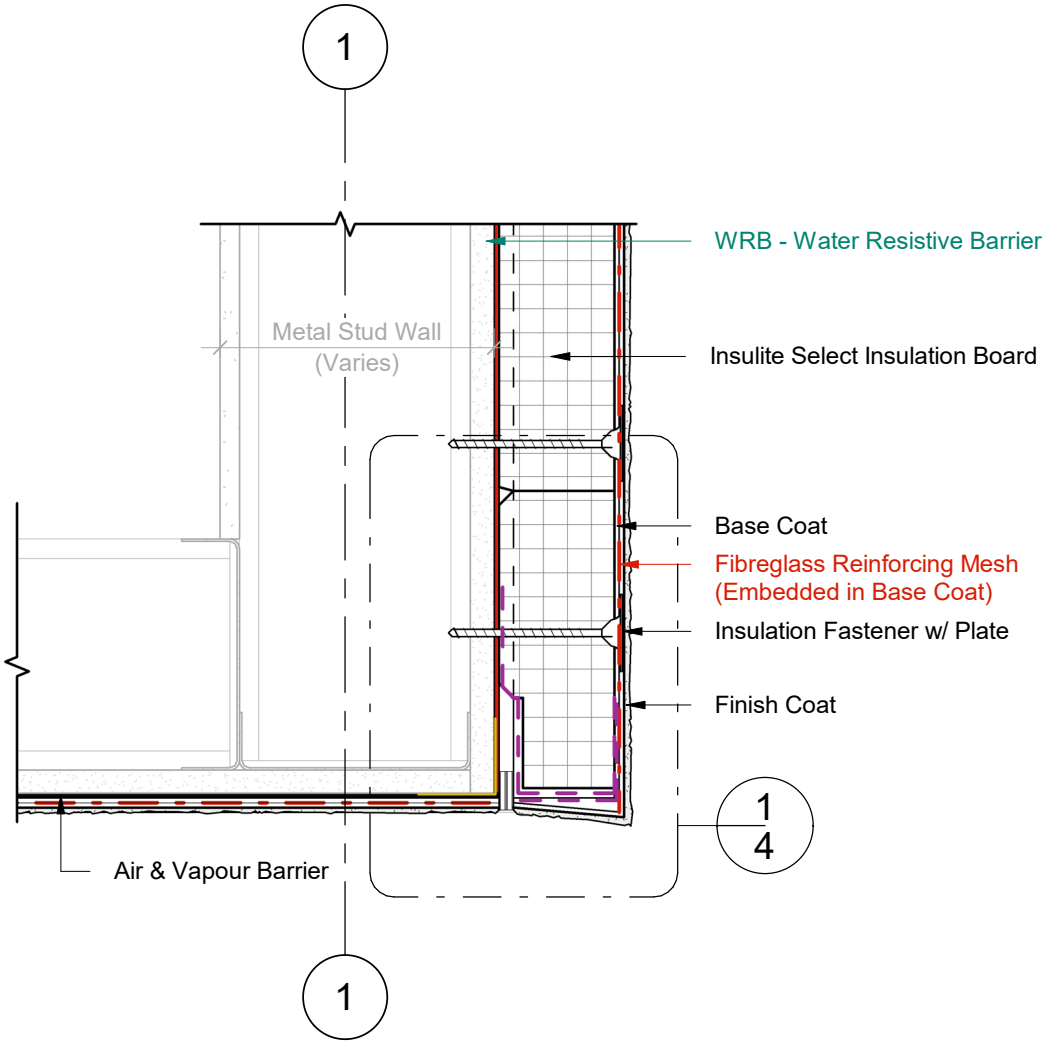

1/3 Wall Section
Scale = 1 : 5

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).

STUCCO SOFFIT INTERFACE WITH FLUSH JOINT

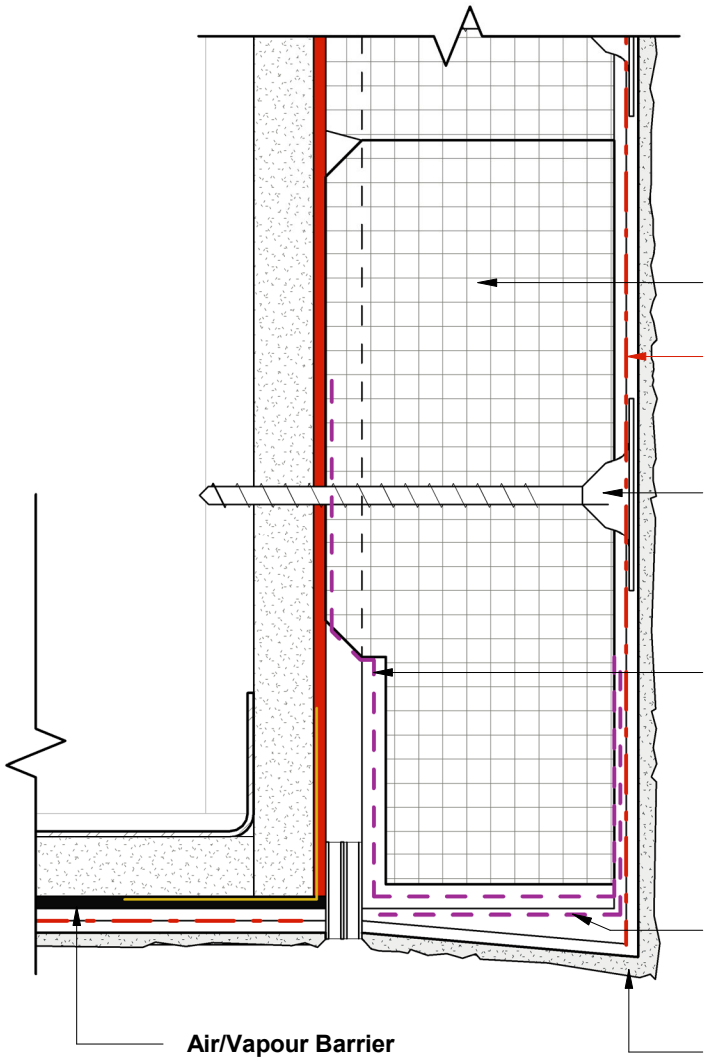

1/4 Wall Section - Callout 1
Scale = 6" = 1'-0"

DURABOND.

Durabond details are offered to assist in the development of project specific details; principles and variables incorporated in all details are the sole responsibility of the project professional(s).